


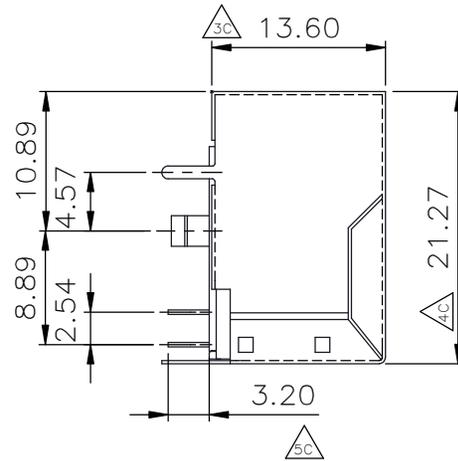


THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

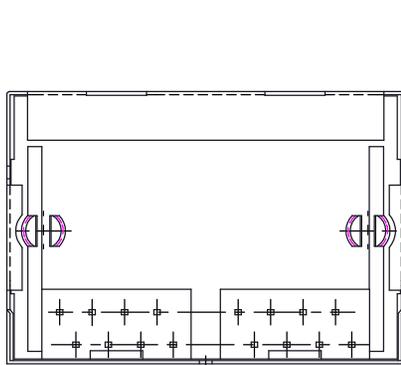

PCB LAYOUT/TOP VIEW

* UNLESS OTHERWISE SPECIFIED TOLERANCES
ON DECIMAL IS: ANGLE X.^o ± 3' X.X' ± 1"
UNIT: MM X. ± 0.30
X.X ± 0.25
X.XX ± 0.20
X.XXX ± 0.15

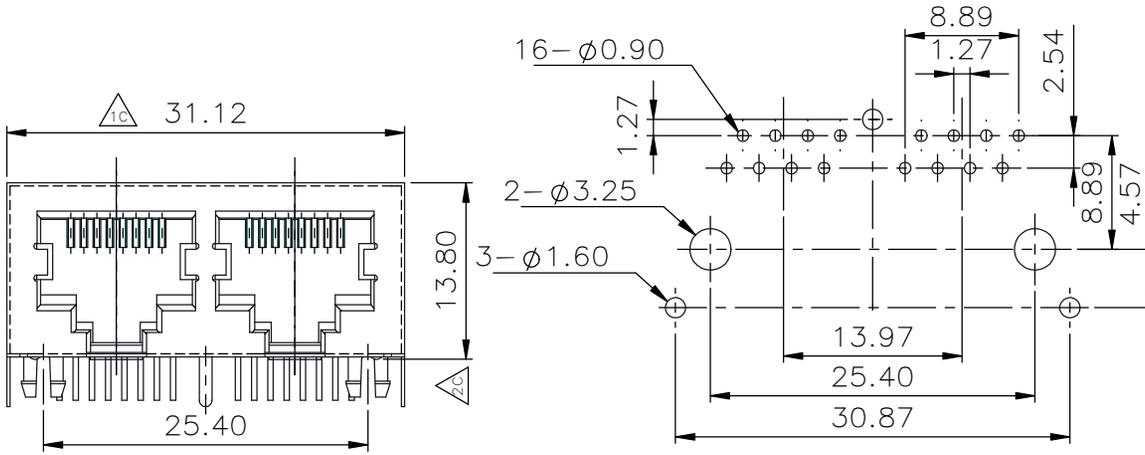

1. MATERIALS:

- 1.1 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.
- 1.2 CONTACTS: PHOSPHOR BRONZE
- 1.3 PLATING: GOLD PLATING 6u" OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.
- 1.4 SHIELDED: BRASS WITH NICKEL PLATED

Ordering Information

Type/Size	P/N-BULK	Product Code
2port-Shielded	2101-0112-01	MH3012-S-02

THESE DRAWINGS AND SPECIFICATIONS ARE THE
PROPERTY OF MH CONNECTORS AND SHALL NOT BE
REPRODUCED, COPIED OR USED AS THE BASIS FOR
THE MANUFACTURE OR SALE OF APPARATUS WITHOUT
WRITTEN PERMISSION.

DRAWN
Johnny Chen
DATE
02-08-22

APPROVED
Victor Lin
DATE
02-08-22

SCALE SHEET OF REV:
1 OF 1 1.0

DRAWING No
MH3012-S-02



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCE.



MH CONNECTORS,
DIVISION OF EDAC