

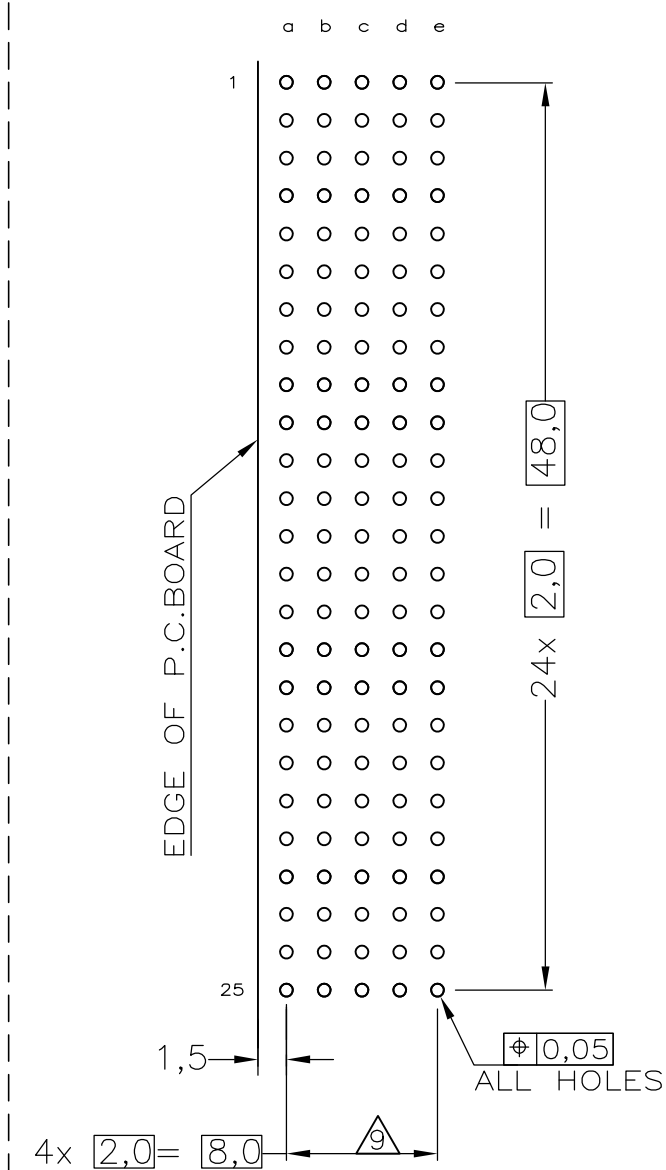


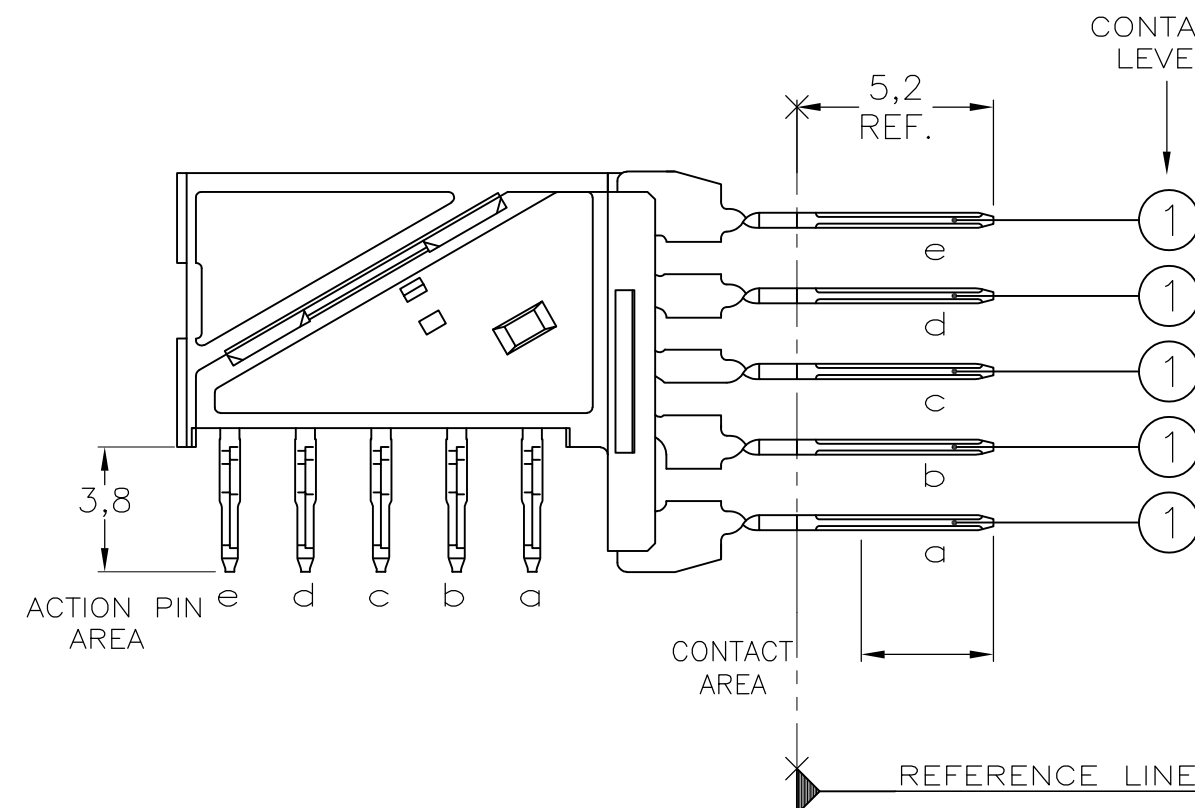

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE APPLICATION SPECIFICATION

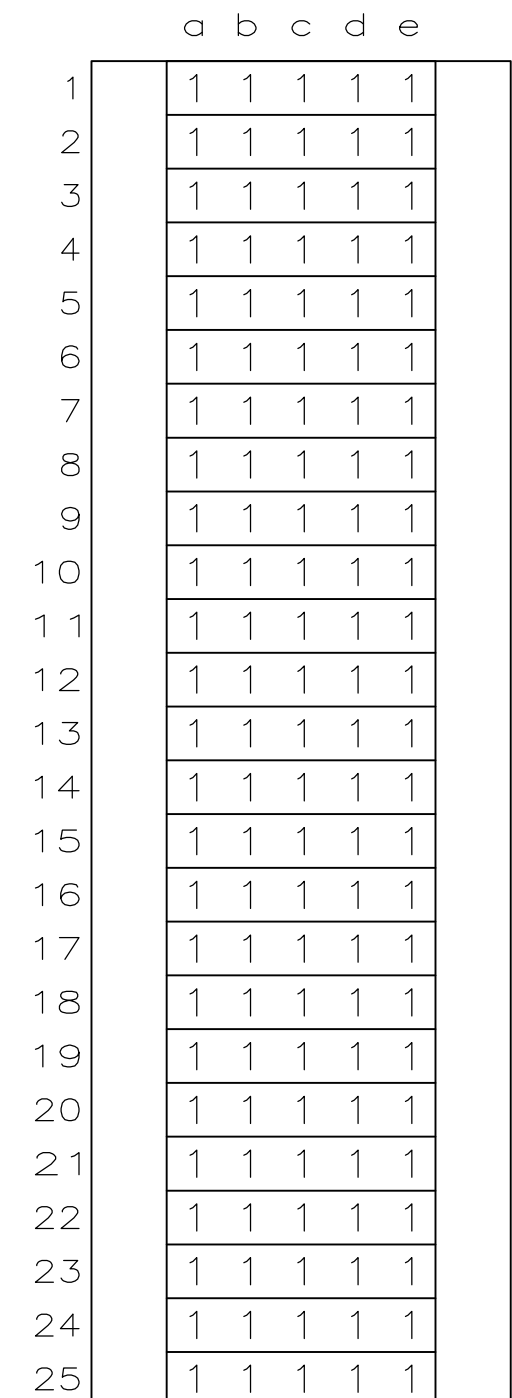

11	CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.
12	0.76um MIN. GOLD PLATING AT MATING SURFACE
13	1.27um MIN. GOLD PLATING AT MATING SURFACE

OBSOLETE	N	 	5-106014-0
	N	 	3-106014-0
	Y 		1-106014-9
	N		1-106014-1 
	Y 		106014-9
	N		106014-4
	N		106014-1
	CONSERVATION TREATMENT	CONTACT FINISH	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.v.d.HEIJDEN 15DEC97 CHK D. TRUREN 15DEC97		 TE Connectivity							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.2 1 PLC ± 0.2 2 PLC ± 0.2 3 PLC ± 0.2 4 PLC ± 0.2 ANGLES ± _		NAME Z-PACK 2MM HM TYPE B 125 POS. RIGHT ANGLE MALE CONNECTOR ASSEMBLY							
		APVD F.v.KONINGSBRUGGE PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029		SIZE A2		GAGE CODE 00779		DRAWING NO C-106014		RESTRICTED TO _	
MATERIAL _		FINISH _		WEIGHT _		CUSTOMER DRAWING					
				SCALE NTS		SHEET 1 OF 1		REV N			