EK-28586-C77

SHT I.I

NOTE

I. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

2

 2.77 ± 0.05


 $[.109\pm.002]$

 3.99 ± 0.02


- 5,56±0,02 [.219±.001]

 $[.157 \pm .001]$

LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO ± 0 ,17 [.007].

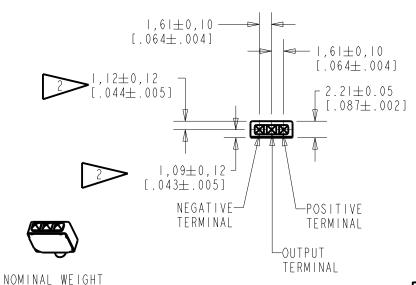

 $[.0635\pm .0025]$

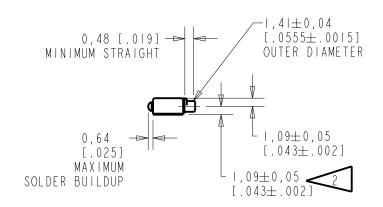


DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

. I3 GRAM

Revision	C.O. #	Implementation	Date	RELEASE LEVEI	REVISION	
B A	M10105324 M10101350	2 - I 2 - I 4 I - 25 - 07		Activo	В	
SCALE:	SCALE: 2:1					DATE
DO NOT SCALE DRAWING						1 - 25 - 07 DATE
TITLE:	MIC	ROPHONE		EK-28586-C77	GJP APP. BY	2 - 0 4 - 0 7
	OUTL	INE DRAWING		SHT I.I	G J P	2 - 0 4 - 0 7



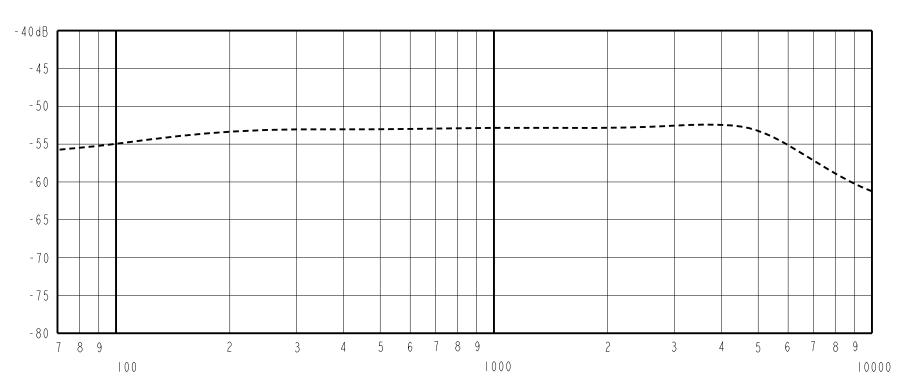

SENSITIVITY

DEVICE CONFORMITY

FREQUENCY	MIN.	NOM.	MAX	RANGE OF DEVIATION FROM 1000Hz
50-90		- 56.0		
100		- 55.0		-2.5 -1.0
1000	- 55.0	-53.0	-51.0	0.0 0.0
4500		- 52 . 5		-3.0 +4.0

FREQUENCY IN HERTZ

NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. OF 1000 Hz.
- 4. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.
- 5. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

	PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC		OUTPUT IMPEDANCE OHMS		
						MIN.	NOM.	MAX.
Ì	128	1.3V	50 μA MAX.	3 dB MAX.	26.0 dB MAX.	2800	4400	6800

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
В	MI0105324	2-12-14	Active	l R
А	MI0101350	1 - 25 - 07		

DATE

2-04-07

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION PR. BY CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION 1-25-07 CK. BY DATE MICROPHONE EK-28586-C77 2 - 04 - 07 GJP APP. BY DATE PERFORMANCE SPECIFICATION SHT GJP