

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Basic termination blocks with spring-cage connection for NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 3-pos.

The illustration shows versions with a different no. of positions



Key commercial data

Packing unit	1 pc
GTIN	4 017918 101169
Weight per Piece (excluding packing)	38.77 GRM
Custom tariff number	85369010
Country of origin	Poland

Technical data

Dimensions

Width	20.8 mm
Height	58.4 mm
Depth	108 mm

General

Nominal voltage U _N	400 V (voltage is determined by the coupling connector.)
Nominal current I _N	16 A (current is determined by the coupling connector.)
Color	gray
Insulating material	PA

Connection data

Conductor cross section solid min.	0.5 mm²
Conductor cross section solid max.	6 mm²



Technical data

Connection data

Conductor cross section stranded min.	0.4 mm²
Conductor cross section stranded max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	10
Connection method	Spring-cage connection
Stripping length	14 mm

Classifications

eCl@ss

eCl@ss 4.0	27141127
eCl@ss 4.1	27141127
eCl@ss 5.0	27371603
eCl@ss 5.1	27371603
eCl@ss 6.0	27371603
eCl@ss 7.0	27371603
eCl@ss 8.0	27371603

ETIM

ETIM 2.0	EC001456
ETIM 3.0	EC001456
ETIM 4.0	EC001456
ETIM 5.0	EC001456


UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Drawings




Schematic diagram

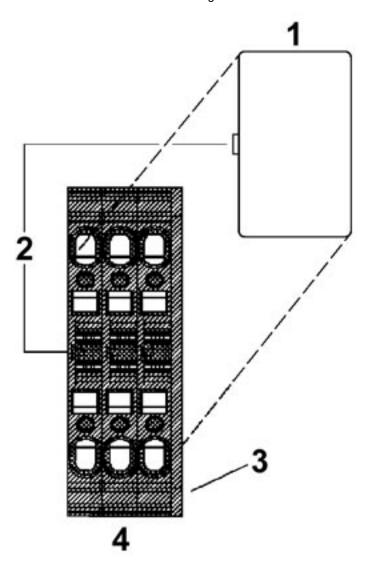

- 1 = Coupling connector 2 = Coding
- 3 = Cover
- 4 = Basic termination block



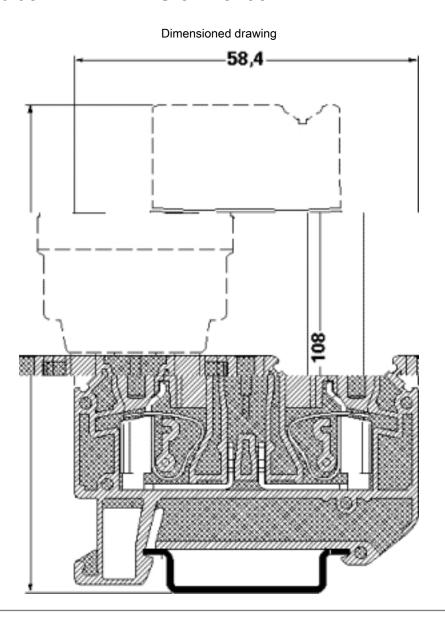

Phoenix Contact 2014 © - all rights reserved http://www.phoenixcontact.com