_				
<b>—</b>	ם ا	н т -	п	0







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Composite			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65°C to +175°C			
	-Salt Spray	: 2000 hours			
L					

: 39.9 g ± 10%

8D 0

G

17

J

75

S

F

Е


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M25x1-6g		


ORIENTATION : E

CONTACT LAYOUT : 17-75

CONTACT TYPE : SOCKET(500 Matings)

Е



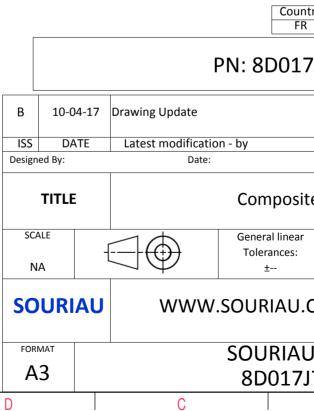

	Ξ		A			
					4	
		3				
	AMPLE				3	
whic er of t	non-conformit h does not co he Parties or b n, technical n	mply with by a third part otice.)				
Intry R	Jurisd	liction & Cont Not Listed	rol List		2	
L <b>7</b> J7	75SE					
		CUSTOME	R DRAWING	MOD N°		
site	e Receptacle 8D series					
ar	NPRDS / PROJECT 859				1	
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
/J/:	5SE-C B		A	1/2	J	

r	Ŧ	ര	н <b>г</b>	m		0		
		Contact Layout <b>75</b>				Panel Cuto SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING R1		
4					Ter -			
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			4	Max. thickness panel for receptacle: Typ	_Ø⊺ vpe 0: front mo	
ω						Dim ØA ØAA R1 ØT		
	F					SOURIAU shall not be lia	able for a	
						due to a use of the Pr the Specifications issued b (professional reco	Products w by either (	
N						PN: 8		
					ISS DATE Designed By:	Date:		
<u> </u>					SCALE NA		eral linear lerances: ±	
					FORMAT	SOL	URIAU	
	Н	G	F	E	A3	C	D017J	

