

MATERIALS &
SPECIFICATIONS

INSULATOR:

THERMOPLASTIC PER
MIL-M-24519, TYPE
GLCP-30F OR GST-40F
NATURAL

CONTACT:

BERYLLIUM COPPER PER
ASTM B194, C17200.
GOLD PLATED PER ASTM
B488, (HARD GOLD)
TYPE II CODE C CLASS
1.27 (CONTACT MATING
AREA ONLY)

TERMINATION:

SOLDER COATED PER J-
STD-006 OR PLATED
PER AMS-P-81728

CURRENT CAPACITY:

1 AMP MAX PER MIL-
DTL-32139





CONTACT RESISTANCE:

71 MILLIOHMS (71mV)
MAX @ 1.0 AMPS PER
MIL-DTL-32139

PART NO.	A79026-001	REV	ECO	DATE	APP
		E	103737	08-28-17	TLM



ACTUAL SIZE

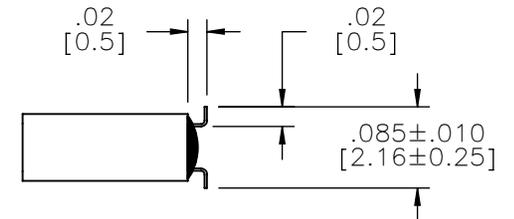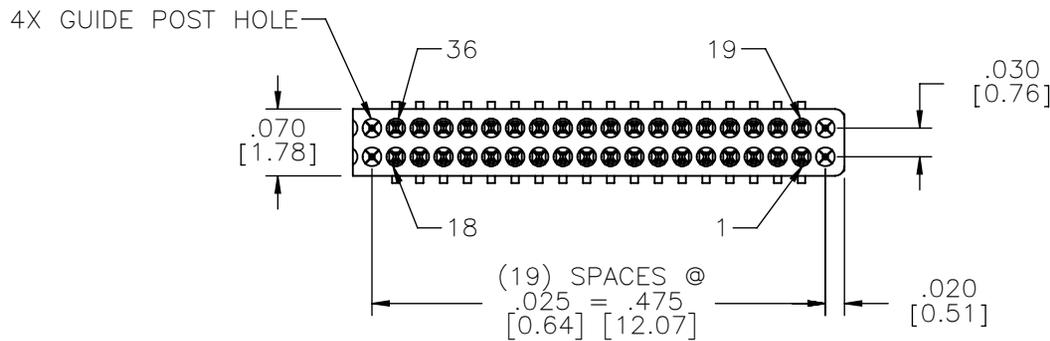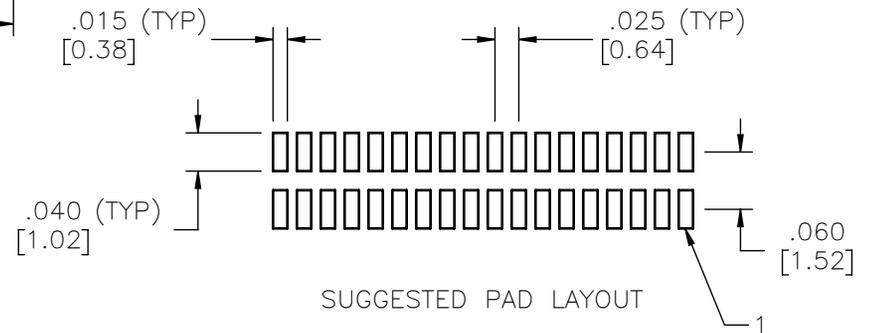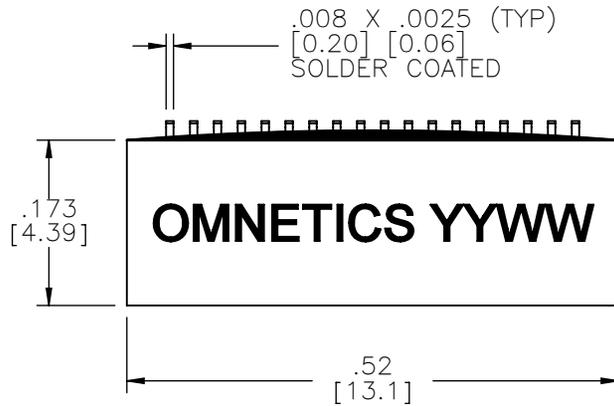

NOTE:

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

MFGS CND SLOW	THIRD ANGLE
	-TOLERANCES-
	UNLESS OTHERWISE NOTED
	DIMENSIONS IN INCHES
2	PL DEC ± .01
3	PL DEC ± .005
4	PL DEC ± .0005
ANGLES ± 1°	

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF
OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR
DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.

DFTM.	TLM	DATE	09-18-08
CHK'D.		DATE	
APP'D.		DATE	

TITLE:
(36) PIN MALE NANO
DUAL ROW CONNECTOR
W/GUIDE POST HOLES

OMNETICS
CONNECTOR CORPORATION
7260 COMMERCE CIRCLE EAST
MINNEAPOLIS, MN 55432
WWW.OMNETICS.COM

CAGE CODE 61873	
DWG NO. A79026-001	
SHEET 1 OF 1	REV E
SCALE: 5:1	