THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

1. 4mm BANANA PLUG LEAD, STACKING SHEATHED PLUG TO STACKING SHEATHED PLUG, 0.75mm2, SILICONE JACKETED WIRE. CE MARK AND CSA LISTED (US AND CANADA).

2. SPECIFICATIONS:

WIRE:

REINFORCED SILICONE ( $-60^{\circ}$  C TO  $+180^{\circ}$  C) 195x0.07mm STRANDED BARE COPPER, 0.75mm2 CROSS SECTION, 18 AWG, Ø.146±.008 (Ø3.7±0.2mm) 0.D.

INSULATED HOUSING: POLYPROPYLENE THERMOPLASTIC, UL94V-0.

CONTACT:

4mm, 9 LEAF, BERYLLIUM COPPER, NICKEL PLATED.

PLUG BODY:

BRASS, NICKEL PLATED.

3. RATING:


IEC 61010-031 1,000 V CAT III / 600 V CAT IV P2.

CURRENT: 12 A MAX.

TEMPERATURE:  $-25^{\circ}$  C TO  $+80^{\circ}$  C.

CE DECLARATION OF CONFORMITY, LVD CONFORMS TO RoHS DIRECTIVE 2011/65/EU EXEMPTION: ANNEX III, 6(c) — COPPER ALLOY CONTAINS UP TO 4% LEAD BY WEIGHT.

REVISIONS									
REV.	DESCRIPTIONS	DATE	APPROVED						
_	CLASS A RELEASED	7/12/99							
А	NOTE 3: ADDED IEC 61010-031 600 CAT IV & RoHS; REVISED PLUG CONFIGURATION, PAGE 2.	2/7/05							
В	REVISED NOTES 3.	5/18/11							

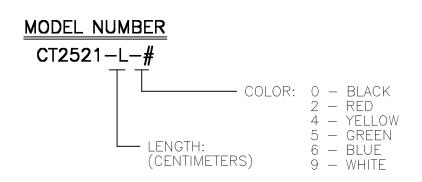

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610					
		TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ±.005 DO NOT SCALE DRAWING	APPROVALS DATE							
			DRAWN WDH	7/12/99	TITLE	TEST LEAD, 4 mm STACKING SHEATH BANANA				_
	I	MATERIAL	CHECKED	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	TEST LEAD, 4 mm STACKING SHEATH BANANA PLUG TO STACKING SHEATH BANANA PLUG, 18 AWG (0.75mm2), SILICONE JACKET			G		
		FINISH	ENGR.		SIZE	CAGE CODE	DW	/G NO	252100	REV.
NEXT ASSY	USED ON		DESIGN ACTIVITY		Α	43F45		P252100		В
APPLICATION					scale NONE				SHEET 1 OF	2

