








THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A	INITIAL RELEASE	20JUL2017	C.W I.Y

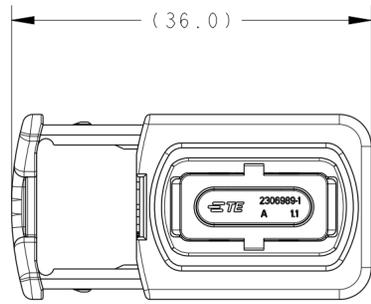

NOTES

- 1 TE LOGO
- 2 ASSY PN, PRODUCTION DATE (CALENDAR DAY/YEAR); MARKING OPTIONAL AS LASER ENGRAVING OR LASER WITH COLOR CHANGE
- 3 BULK PACKAGING IN CORRUGATED BOX
- 4 CAVITY NUMBERING
- 5 CAVITIES MATED WITH AMP MCP 1.5k SEE PRODUCT GROUP DRAWING TE NO: 1241436
- 6 IN CASE OF IPX9K WATERPROOF GRADE APPLICATION. REFER TO DRAWING: 1670150, 1670365 FOR SUITABLE PROTECTIVE COVER.
- 7 FITS TO TE INTERFACE DRAWING 114-18743-1
- 8 SUITABLE COUNTERPART SEE DRAWING: 1670730, 1703843, 2278730
- 9 DELIVERY CONDITION: SECONDARY LOCKING IN LOCK POSITION AND SLIDE IN PRE-LOCKED POSITION
- 10 RESISTOR CHARACTERISTICS: 120 OHMS±10%, AT 70°C, 0.4WATTS MIN.

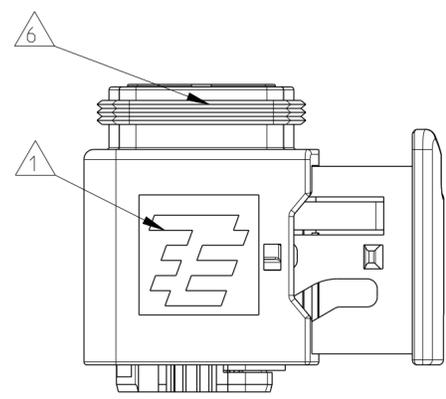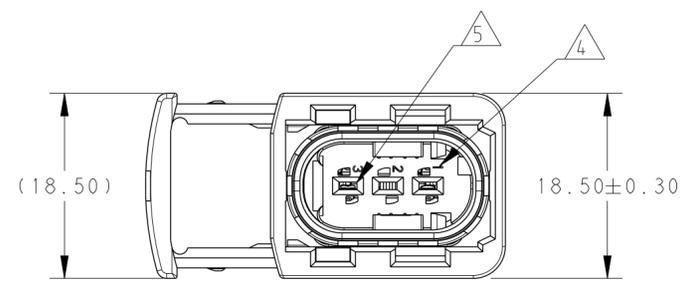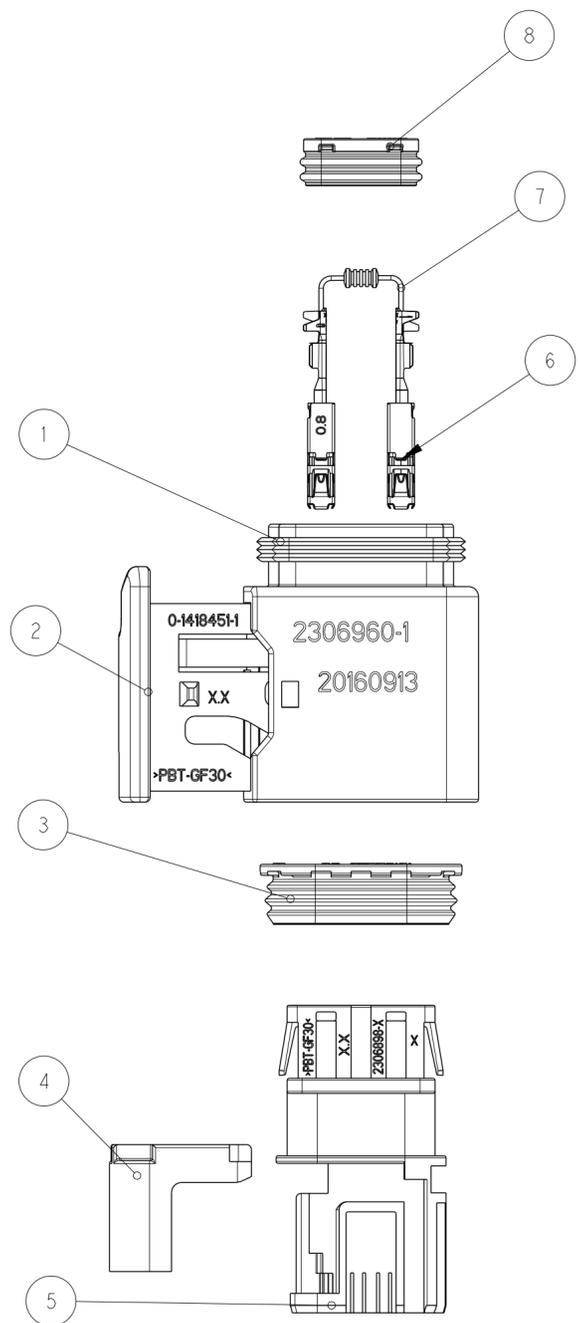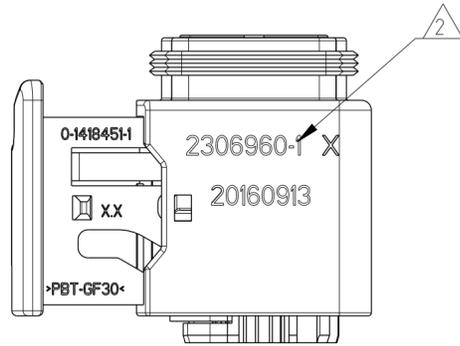

Q'TY	COLOUR	MATERIAL	DESCRIPTION	ITEM NO	
1	WHITE	SILICONE	CAVITY BLOCK CAP	8	
1	-	-	120 ohm RESISTOR	7	
2	-	Cu ALLOY	CONTACT	6	
1	WHITE	PBT-GF30	3POS CAVITY BLOCK	5	
1	YELLOW	PBT-GF30	3POS. SEC. LOCK	4	
1	WHITE	SILICONE	2-3POS. SEAL	3	
1	YELLOW	PBT-GF30	2-3POS. U-SLIDE	2	
1	BLACK	PBT-GF30	2-3POS. REC. HSG	1	
Q'TY		COLOUR	MATERIAL	DESCRIPTION	ITEM NO
2306960-1		PART NUMBER OF ASS'Y			
A		PRODUCT VERSION			
11.80		WEIGHT OF ASS'Y PART			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	C. WAN	09OCT2017
CHK	E. JIANG	09OCT2017
APVD	I. YIN	09OCT2017
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	11.8g	
CUSTOMER DRAWING	SCALE	2:1
SHEET	1	OF 1
REV	A	

TE Connectivity

NAME: HDSCS WITH 120ohms RESISTOR 3POS. FEMALE CONNECTOR

SIZE: A2 CAGE CODE: 00779 DRAWING NO: C-2306960