
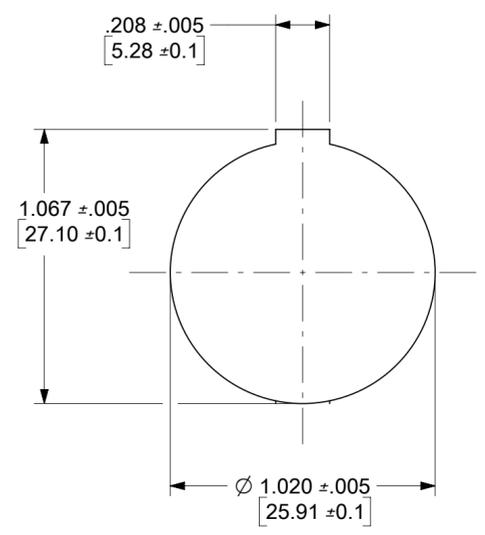
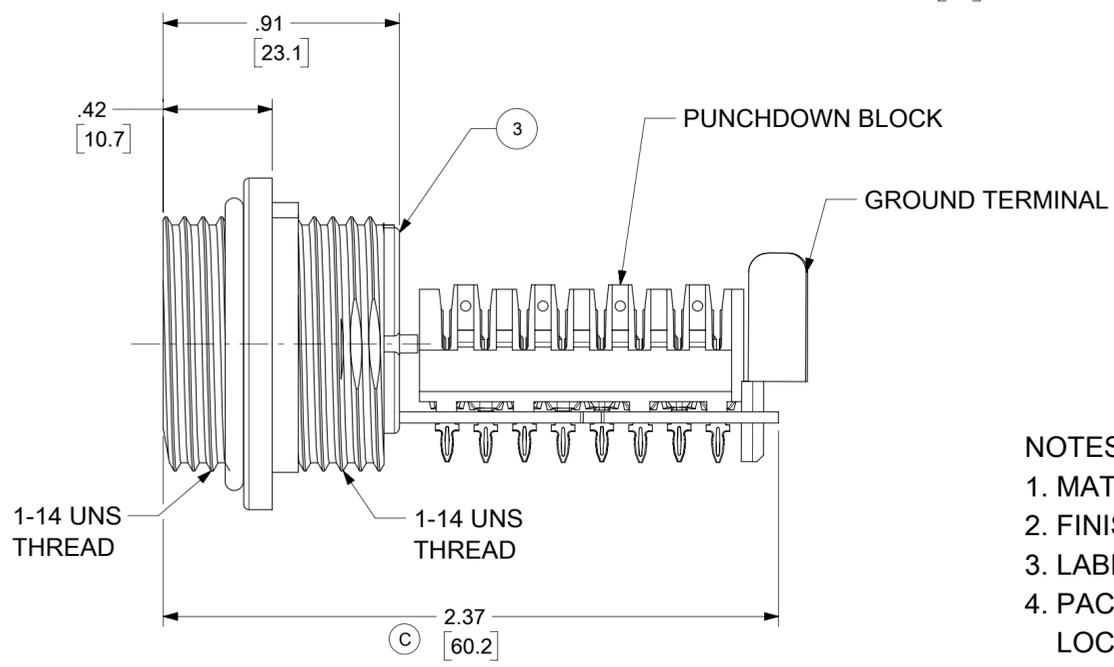
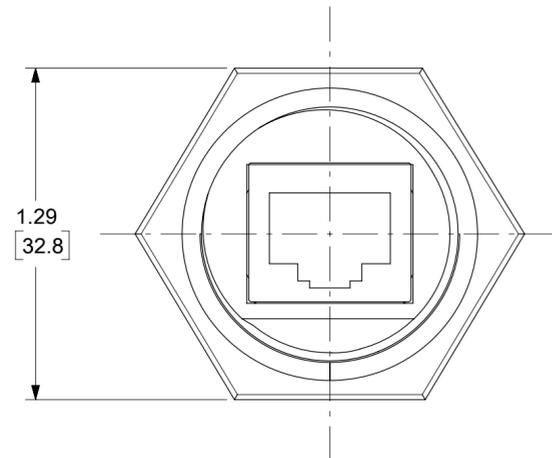


WIRING LEGEND	
BL/W	BLUE/WHITE
BL	BLUE
O/W	ORANGE/WHITE
O	ORANGE
G/W	GREEN/WHITE
G	GREEN
BR/W	BROWN/WHITE
BR	BROWN

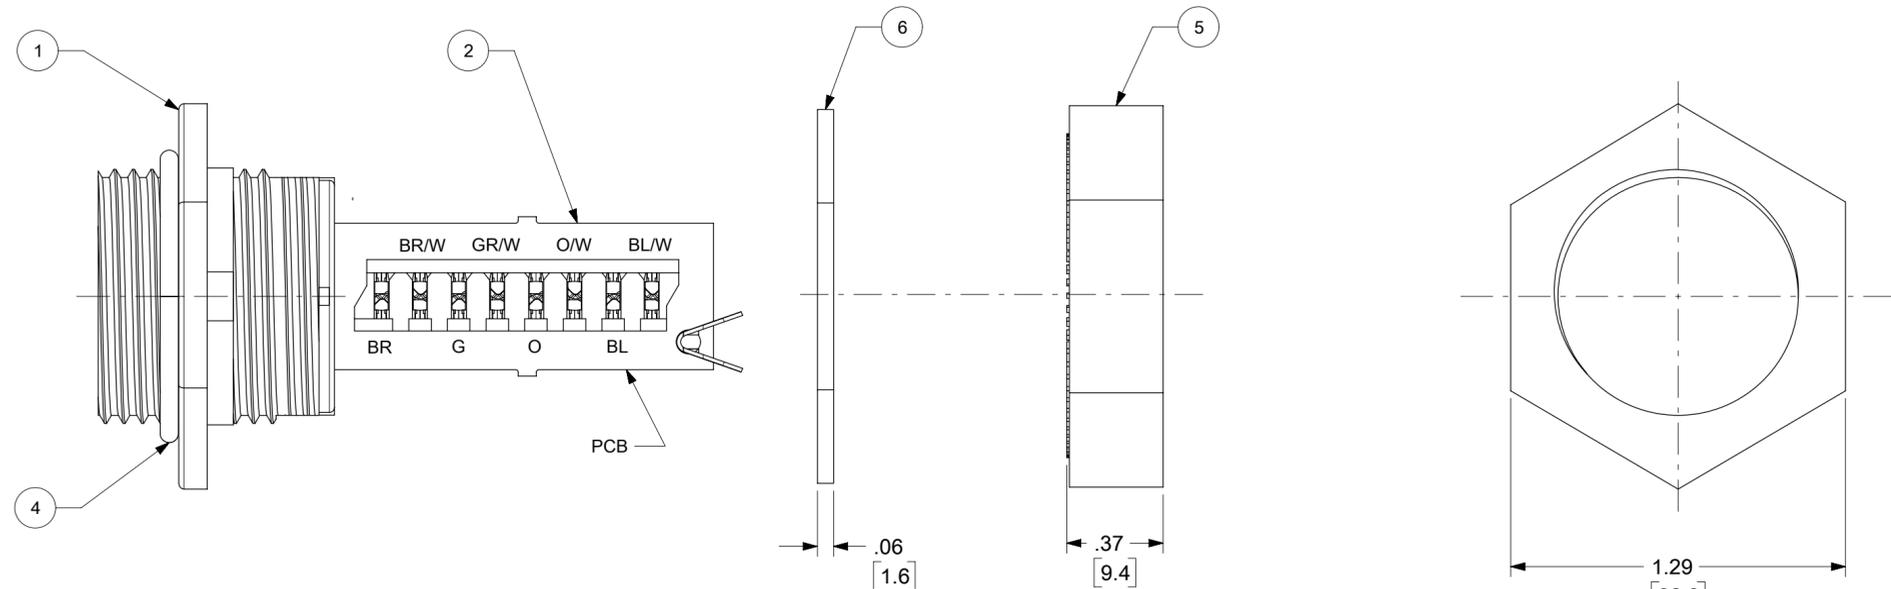

RECOMMENDED PANEL CUT-OUT
 PANEL THICKNESS:
 .125 MAX WITH GASKET
 .187 MAX / .062 MIN. WITHOUT GASKET

- NOTES:**
1. MATERIAL: AS NOTED
 2. FINISHES: AS NOTED
 3. LABEL IS MARKED WITH P/N, BAR CODE & DESCRIPTION
 4. PACKAGING: RECEPTACLE ASSEMBLY IS PACKED IN POLY BAG WITH LOCKNUT & GASKET UNASSEMBLED. LABEL ATTACHED IS TO OUTSIDE OF BAG
 5. ELECTRICAL SPECIFICATIONS:
 FIELD WIRE TO PCB: 8 POSITIONS PLUS SHIELD
 MAX VOLTAGE: 125 VDC
 MAX CURRENT: 1.5A
 6. PROTECTION: IP67
 7. TEMP. RANGE: -20°C TO +80°C
 8. ALL DIMENSIONS ARE FOR REFERENCE UNLESS TOLERANCED OR NOTED OTHERWISE.

6	GASKET	NITRILE	BLACK
5	LOCKNUT	ABS	BLACK
4	O-RING	VITON	BROWN
3	REAR SNAP COVER	ABS	BLACK
2	CONN. ASSY CAT 5E		
1	PANEL MOUNT HOUSING	ABS	BLACK
ITEM	DESCRIPTION	MATERIAL	FINISH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
FUNCTIONAL SYMBOLS	DIMENSION UNITS	SCALE	CURRENT REV DESC: REV'D OAL WAS 2.19, UPDATE DOC PER LATEST STD.						
$\frac{F}{A} = 0$	IN/MM	2:1	molex RJ-LNXX FEMALE RECEPTACLE RJ45, 110 PUNCHDOWN PRODUCT CUSTOMER DRAWING						
$\frac{F}{C} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)								
$\frac{F}{P} = 0$									
DIVISIONAL SYMBOLS	MM	INCH							
	4 PLACES	±	±	EC NO: 646164					
	3 PLACES	±	±	DRWN: RSTONE		2020/09/22			
	2 PLACES	±	±	CHK'D: CCHRASKA		2020/09/29			
	1 PLACE	±	±	APPR: BWOODMAN		2020/10/06			
	0 PLACES	±	±	INITIAL REVISION:					
	ANGULAR TOL	± 0.5°		DRWN: BRUPERT		2009/04/20			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			APPR: JFMURPHY		2009/04/22			
	THIRD ANGLE PROJECTION			DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	DOC TYPE	DOC PART
				C-SIZE	130053	1300530002	GENERAL MARKET	PSD	001
									REVISION
									1 C
									SHEET NUMBER
									1 OF 1