

### **DAISY-8X1-W-MATT-D**

~50° wide beam. Variant with diffused lenses.

### **SPECIFICATION:**

Dimensions 305.3 x 38.1 mm

Height 21.1 mm

ROHS compliant yes 1



### **MATERIALS:**

Component	Туре	Material	Colour	Finish
C17342_DAISY-4X1-W-US-D	Linear lens	PMMA	milky	
C17172_DAISY-8X1-SHD-MATT-WHT	Shade	PC	white	matt
C17171 DAISY-8X1-SHD-MATT	Shade	PC	black	matt

### **ORDERING INFORMATION:**

### Quantities for one set:

Linear lens 2 Shade 1




## PRODUCT DATASHEET DAISY-8X1-W-MATT-D

Component		Qty in box	MOQ	MPQ	Box weight (kg)
C17342_DAISY-4X1-W-US-D  » Box size: 480 x 280 x 300 mm	Linear lens	504	84	84	6.1
C17171_DAISY-8X1-SHD-MATT  » Box size: 400 x 300 x 300 mm	Shade	84	42	42	4.0
C17172_DAISY-8X1-SHD-MATT-WHT  » Box size: 400 x 300 x 300 mm	Shade	84	42	42	4.2



# PRODUCT DATASHEET DAISY-8X1-W-MATT-D

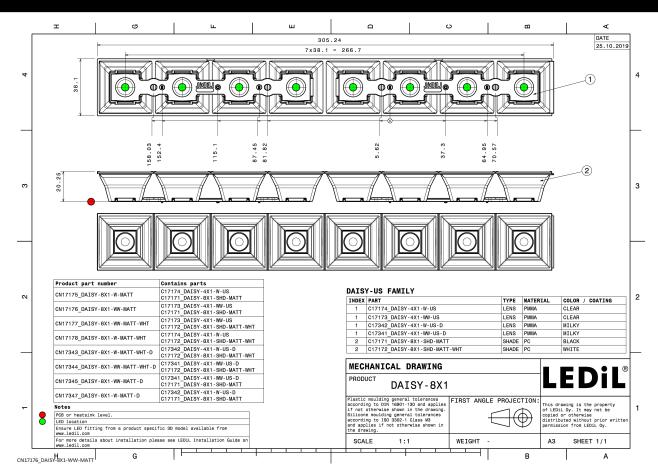

See also our general installation guide: www.ledil.com/installation\_guide

Published: 28/10/2019





### **OPTICAL RESULTS (MEASURED):**

LED LIGHT ENGINE DAISY 8x1 32 LEDs 303.7mm x 20mm

FWHM / FWTM 63.0° / 88.0° Efficiency 76 % Peak intensity 0.7 cd/lm LEDs/each optic Light colour White Required components:

C17171\_DAISY-8X1-SHD-MATT







## AUDAX

LED LIGHT ENGINE DAISY 8x1 32 LEDs 303.7mm x 20mm

FWHM / FWTM 64.0° / 93.0° Efficiency 90 % Peak intensity 0.8 cd/lm LEDs/each optic 4 White Light colour Required components:

C17172\_DAISY-8X1-SHD-MATT-WHT







# AUDAX

LED LIGHT ENGINE DAISY 8x1 32 LEDs 303.7mm x 20mm

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 64.0° / 91.0° Efficiency 87 % Peak intensity 0.8 cd/lm LEDs/each optic Light colour White Required components:

C17534\_DAISY-8X1-SHD-MET-MATT






### **SAMSUNG**

LM28xB Series FWHM / FWTM 60.0° / 84.0° Efficiency 77 % Peak intensity 0.8 cd/lm LEDs/each optic 2 White Light colour

Required components: C17171\_DAISY-8X1-SHD-MATT





Published: 28/10/2019



### **OPTICAL RESULTS (MEASURED):**

# SAMSUNG LED LM28xB Series FWHM / FWTM 60.0° / 86.0° Efficiency 89 % Peak intensity 0.9 cd/lm LEDs/each optic 2 Light colour White Required components: C17172\_DAISY-8X1-SHD-MATT-WHT



# PRODUCT DATASHEET DAISY-8X1-W-MATT-D

### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

### LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

### **Shipping locations**

Salo, Finland Hong Kong, China

### **Distribution Partners**

www.ledil.com/ where\_to\_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.