

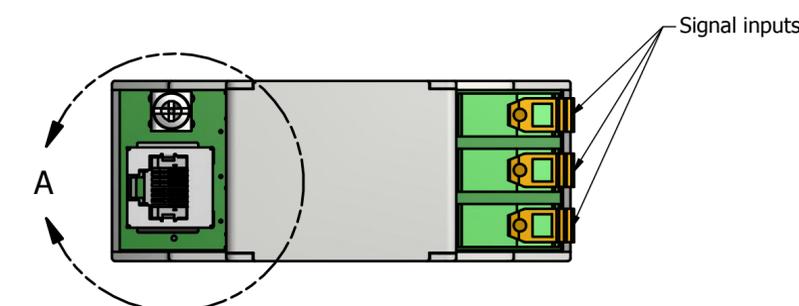
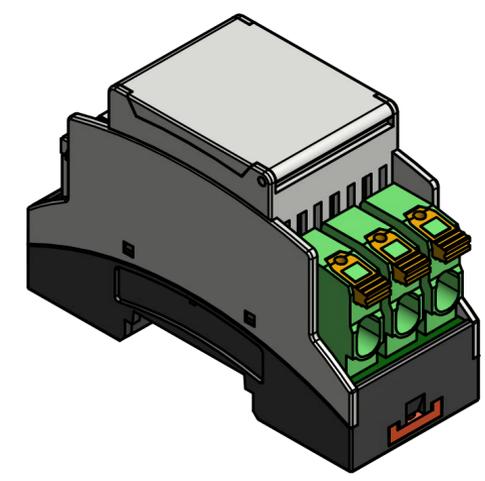




Ground lug  
Signal output

DETAIL A  
SCALE 2 : 1

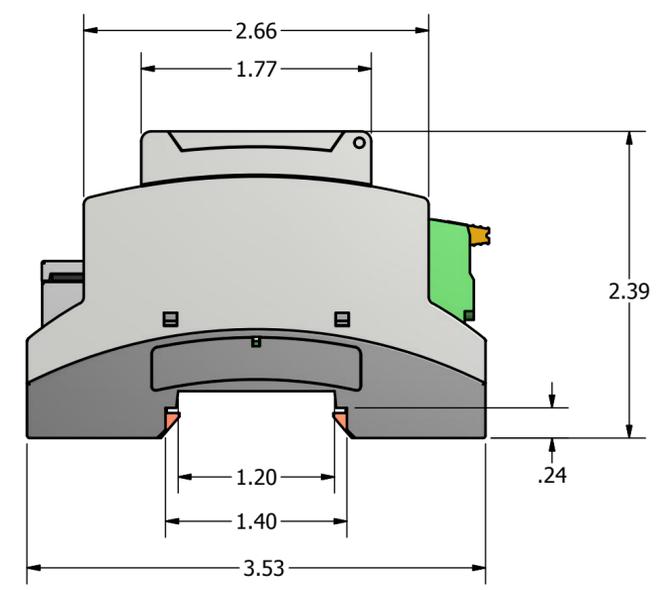


Signal inputs

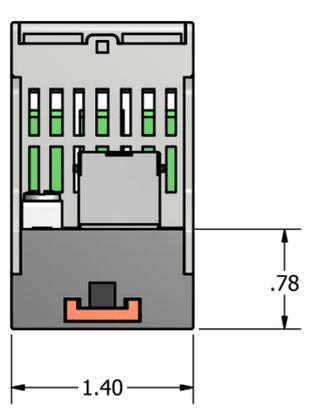

**RJ-45 Jack**  
Top Entry,  
Shielded: Brass, Nickel plate



**Ground lug**  
6/32 x 1/4L Screw  
0.31" square surface  
Brass, Nickel plate

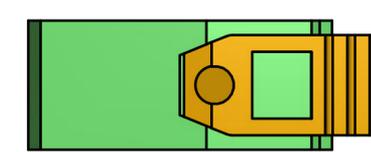

Conductor cross section AWG min.24  
Conductor cross section AWG max.10  
Conductor cross section min.0.2 mm<sup>2</sup>  
Conductor cross section max.6 mm<sup>2</sup>  
Stripping length 12 mm  
Rated surge voltage (III/3) 8 kV

DRAWN	31/05/2015			
CHECKED				
QA		Entube TE		
MFG		SIZE	DWG NO	REV
APPROVED		C		
		SCALE	SHEET 1 OF 1	