
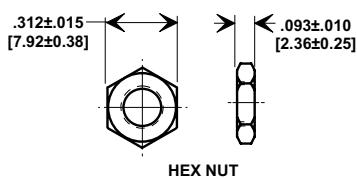
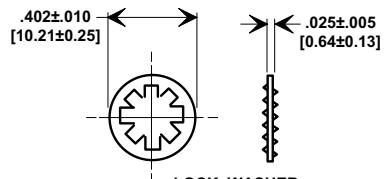
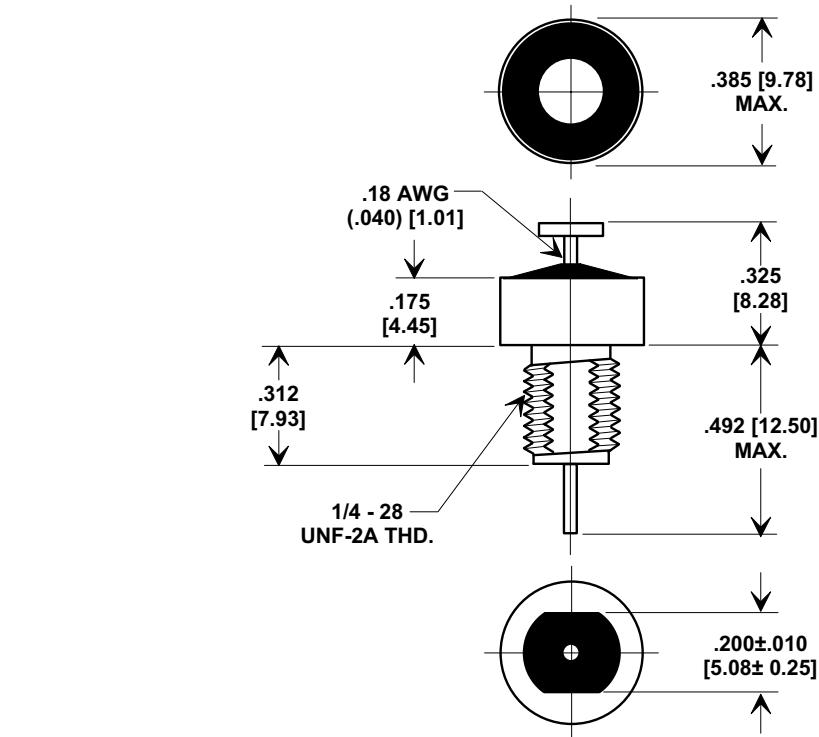


Electrical Testing
per Tucsonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

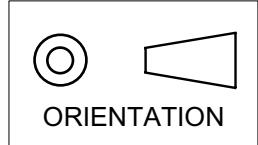

NOTES:

MATERIALS:

BUSHING - TIN PLATED STEEL
LEAD - SOLDER PLATED COPPER
NUT - TIN PLATED BRASS
L" WASHER - TIN PLATED PHOSPHOR BRONZE

MOUNTING TORQUE: 8 lb - ins. max

DCR - .01Ω max.

MAX. SOLDER TEMPERATURE 500°F

MIN. CAP (UF)	DWV (VDC)	I.R. MIN. @ 100 (VDC.)	WORKING VOLTAGE D.C.		CURRENT DC (AMPS.)	MIN. NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220						TEMP. CHARAC.	
			85°C	125°C		30 KHz	100 KHz	300 KHz	1 MHz	10 MHz	1 GHz		
1.4	250	500 M	100	50	15	15	25	34	44	60	70	X7R	
REVISION RECORD													
Original Release C.O. 930129-1	0												
-066 ADDED 0-400 TO 125°C. E.C. 11-18-97													
19971111-9-03	4	REVISED DWG. DRAWING MADE FOR EACH VAR. S.M. 06-13-02											
2002	5	TABLE REVISED 50 WVDC @ 125° WAS 70WVDC @ 125° L.E. 01-17-03											
20030106-1-11	6	REVISED DWG. DRAWING MADE FOR EACH VAR. FROM FAMILY DWG. S.M. 02-06-03											
20030204-2-13	7												
--TOLERANCES-- Unless Otherwise Specified												Title	
DECIMAL ± //												COAXIAL BROADBAND - "L"	
ANGLES ± //												Drawn E.C. 02-01-93	Scale 2 X
TUSONIX TUCSON, ARIZONA												Approved B.Mc. 02-03-93	
A												4600-054	