





Parts List				
ITEM	QTY	PART NUMBER	DESCRIPTION	
1	1	F060621	LAKOAV11	
2	1	F051601	P16 PLASTIC TERM. PROTECTOR	
3	1	F050422	24VDC GREEN LED	
4	1	F051702	25MM RING	
5	1	F061254	25MM GRN LENS	

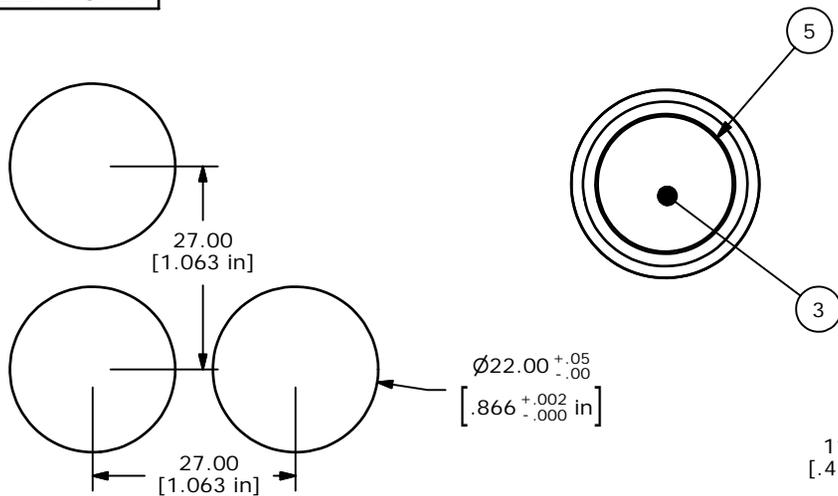


RECOMMEND PANEL MOUNTING



SPDT CONTACT CONFIGURATION

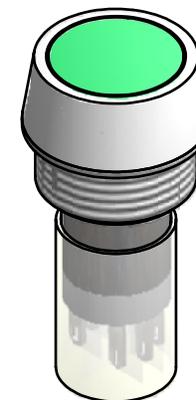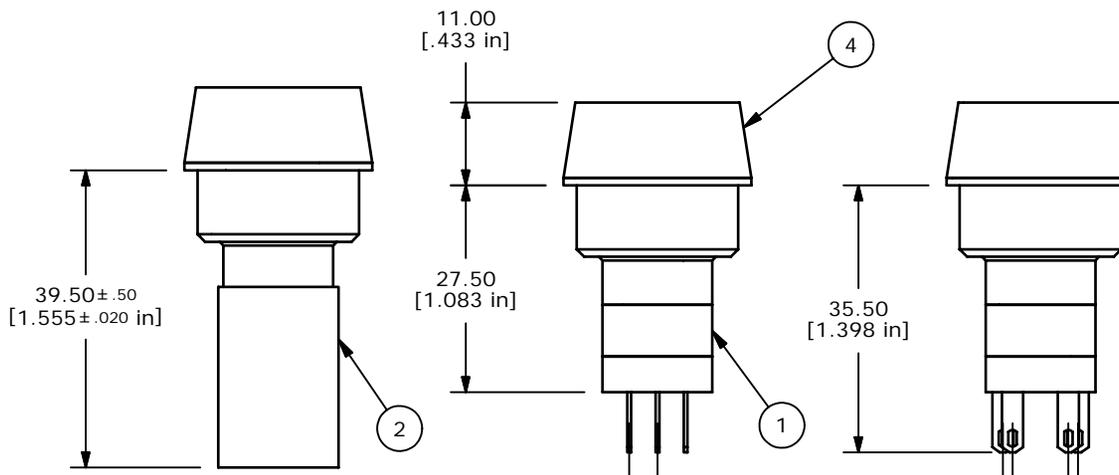

ISOMETRIC



NOTES:

- ALL DIMENSIONS IN MM [INCH].
- GENERAL TOLERANCE: 0.0±0.4  
0.00±0.25
- TERM. NOS. FOR REF. ONLY.
- RATING: 5A @250VAC  
8A @125VAC  
.2A @250VDC  
6A @24VDC
- ELECTRIC LIFE: 50,000 MAKE-OR-BREAK CYCLES AT FULL LOAD.
- INSULATION: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 2000V FOR 1 MIN
- OPERATING TEMP: -25°C TO 55°C
- LENS COLOR: GREEN
- LAMP VOLTAGE: 24VDC LED

**E-SWITCH®**

B	16491	PUT IN MISSING LED ON SCHEMATIC	9/25/2006	TN
A	15664	RELEASED FOR PRODUCTION	1/10/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE LAKOAV11KGRNGRN				
SCALE 1:1	DATE 1/10/2006	DR PH	DWG XF0665P	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED