
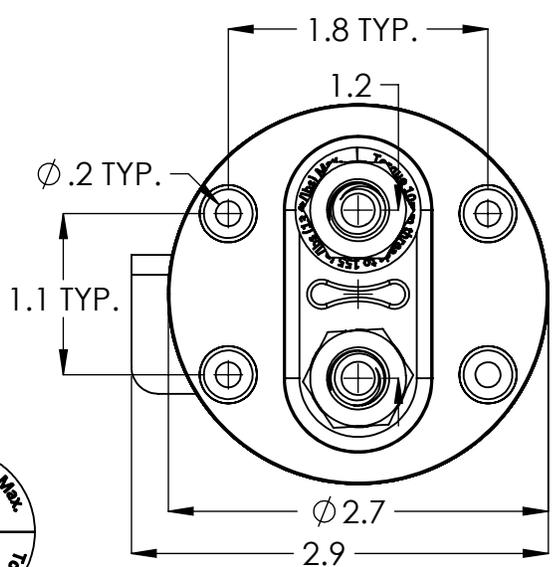


DETAIL SHOWN NOT TO SCALE

**MOUNTING DETAILS**

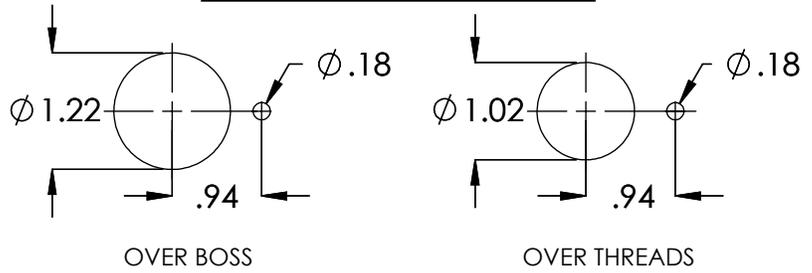

TORQUE TAG

**Technical data:**

Handle Material:	Red GF Nylon 6
Upper Housing Material:	Zinc Diecast
Lower Housing Material:	GP Phenolic
Min. Insulation Resistance:	100 Mohm
Dielectric Withstanding Voltage:	1,100V -1min
Voltage Drop Max.:	0.175 mV
Voltage:	48 VDC
Continuous Rating:	300 A
Overload:	1,100 A - 240sec. 1,500 A - 90sec. 2,000 A - 30sec
Sealing:	IP67
Vibration:	4G / 50-2KHz
Shock:	6G / 11ms
Temperature Range:	-40C to +85C
Terminal Torque:	155 in.lb
Mounting Torque:	18 ft.lb

**PROPRIETARY AND CONFIDENTIAL**  
This document contains proprietary data for products designed by Shallco, Inc., of Smithfield, NC. No disclosure, reproduction, or use of any part thereof may be made except by written permission.

	NAME	DATE
DRAWN	JRT	4-15-15
CHECKED		
ENG APPR.	RMF	4-15-15
MFG APPR.		
Q.A.		

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm 1/32$   
ANGULAR: MACH  $\pm$  BEND  $\pm$   
TWO PLACE DECIMAL  $\pm .010$   
THREE PLACE DECIMAL  $\pm .005$

**SHALLCO**  
308 COMPONENTS DRIVE, SMITHFIELD, NC 27577 USA  
DO NOT SCALE DRAWING

TITLE:  
**LOCKOUT BATTERY SWITCH  
48VDC-300AMPS**

BLANK WEIGHT: - PART WEIGHT: 0.8LBS

SIZE **A** DWG. NO. **500SL-300** REV. **B**  
SHEET 1 OF 1

SCALE:1:2 FILENAME: 500SL-300

REV.	DESCRIPTION	DATE	APP'D
REVISIONS			

DWG NO: 500SL-300