



Discontinued as of August 31, 2011


(10A, 15A, 20A type) (30A, 40A type)

Panasonic

ideas for life

High capacity SSR,
both tab and screw
terminals available

AQ-R RELAYS

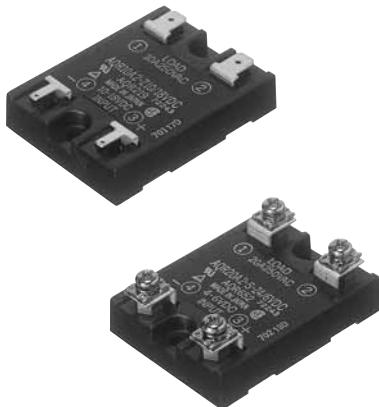

FEATURES

1. Two types of terminal shape: Plug-in terminal and Screw terminal (30 A, 40 A is screw terminal types only)
2. Flat type of SSR possible by aluminium printed circuit board
3. High dielectric strength of 1,500 V between input and output. 4,000 V available for 10A, 15A, 20A devices.
4. Heat sink and DIN mounting rail and terminal cover are available as accessories

APPLICATIONS

1. Molding machine (heater control)
2. Temperature controlled bath (heater control)
3. Printing machine (heater control)
4. Machine tool (motor control)

Compliance with RoHS Directive

ORDERING INFORMATION

AQR - - - -

AQR Solid state Relay

Load current

10 A

15 A

20 A

30 A

40 A

Load voltage

1: 75 to 125 V AC

2: 75 to 250 V AC

Terminal shape

Nil: Plug-in terminal

S: Screw terminal

Type

Z: Zero-cross type (1,500 V)

ZV: Zero-cross type (4,000 V)

Input voltage

4/6 V DC

10/18 V DC

18/28 V DC



TYPES

1. Tab terminal type

Type	Load current	Load voltage	Input voltage	Standard (1,500V AC)	Reinforced (4,000V AC)
				Part No.	Part No.
Zero-cross	10 A	75 to 125V AC	4 to 6V DC	AQR10A1-Z4/6VDC	—
			10 to 18V DC	AQR10A1-Z10/18VDC	—
			18 to 28V DC	AQR10A1-Z18/28VDC	—
	15 A	75 to 250V AC	4 to 6V DC	AQR10A2-Z4/6VDC	AQR10A2-ZV4/6VDC
			10 to 18V DC	AQR10A2-Z10/18VDC	AQR10A2-ZV10/18VDC
			18 to 28V DC	AQR10A2-Z18/28VDC	AQR10A2-ZV18/28VDC
	20 A	75 to 125 V AC	4 to 6V DC	AQR15A1-Z4/6VDC	—
			10 to 18V DC	AQR15A1-Z10/18VDC	—
			18 to 28V DC	AQR15A1-Z18/28VDC	—
	20 A	75 to 250 V AC	4 to 6V DC	AQR15A2-Z4/6VDC	AQR15A2-ZV4/6VDC
			10 to 18V DC	AQR15A2-Z10/18VDC	AQR15A2-ZV10/18VDC
			18 to 28V DC	AQR15A2-Z18/28VDC	AQR15A2-ZV18/28VDC

Standard packing: Carton 10 pcs., Case: 100 pcs.

2. Screw-terminal type

Type	Load current	Load voltage	Input voltage	Standard (1,500V AC)	Reinforced (4,000V AC)
				Part No.	Part No.
Zero-cross	10 A	75 to 125 V AC	4 to 6V DC	AQR10A1-S-Z4/6VDC	—
			10 to 18V DC	AQR10A1-S-Z10/18VDC	—
			18 to 28V DC	AQR10A1-S-Z18/28VDC	—
	15 A	75 to 250 V AC	4 to 6V DC	AQR10A2-S-Z4/6VDC	AQR10A2-S-ZV4/6VDC
			10 to 18V DC	AQR10A2-S-Z10/18VDC	AQR10A2-S-ZV10/18VDC
			18 to 28V DC	AQR10A2-S-Z18/28VDC	AQR10A2-S-ZV18/28VDC
	15 A	75 to 125 V AC	4 to 6V DC	AQR15A1-S-Z4/6VDC	—
			10 to 18V DC	AQR15A1-S-Z10/18VDC	—
			18 to 28V DC	AQR15A1-S-Z18/28VDC	—
	20 A	75 to 250 V AC	4 to 6V DC	AQR15A2-S-Z4/6VDC	AQR15A2-S-ZV4/6VDC
			10 to 18V DC	AQR15A2-S-Z10/18VDC	AQR15A2-S-ZV10/18VDC
			18 to 28V DC	AQR15A2-S-Z18/28VDC	AQR15A2-S-ZV18/28VDC
	20 A	75 to 125 V AC	4 to 6V DC	AQR20A1-S-Z4/6VDC	—
			10 to 18V DC	AQR20A1-S-Z10/18VDC	—
			18 to 28V DC	AQR20A1-S-Z18/28VDC	—
	20 A	75 to 250 V AC	4 to 6V DC	AQR20A2-S-Z4/6VDC	AQR20A2-S-ZV4/6VDC
			10 to 18V DC	AQR20A2-S-Z10/18VDC	AQR20A2-S-ZV10/18VDC
			18 to 28V DC	AQR20A2-S-Z18/28VDC	AQR20A2-S-ZV18/28VDC
	30 A	75 to 250 V AC	4 to 6V DC	AQR30A2-S-Z4/6VDC	—
			10 to 18V DC	AQR30A2-S-Z10/18VDC	—
			18 to 28V DC	AQR30A2-S-Z18/28VDC	—
	40 A	75 to 250 V AC	4 to 6V DC	AQR40A2-S-Z4/6VDC	—
			10 to 18V DC	AQR40A2-S-Z10/18VDC	—
			18 to 28V DC	AQR40A2-S-Z18/28VDC	—

Standard packing: Carton 10 pcs., Case: 100 pcs.



Discontinued as of August 31, 2011

AQ-R

SPECIFICATIONS

1. Ratings (at 20°C 68°F, Input ripple: 1% or less)

1) 10 A type

Items	Part No.	AQR10A1-Z4/ 6VDC	AQR10A1-Z10/ 18VDC	AQR10A1-Z18/ 28VDC	AQR10A2-Z4/ 6VDC	AQR10A2-Z10/ 18VDC	AQR10A2-Z18/ 28VDC	Remarks
Input side	Input voltage	4 to 6V DC	10 to 18V DC	18 to 28V DC	4 to 6V DC	10 to 18V DC	18 to 28V DC	Ta = Max. 40°C 104°F *1
	Input impedance	Approx. 0.26 kΩ	Approx. 0.86 kΩ	Approx. 1.36 kΩ	Approx. 0.26 kΩ	Approx. 0.86 kΩ	Approx. 1.36 kΩ	
	Drop-out voltage, min.				1 V			
Load side	Max. load current				10 A* ²			In one cycle at 60 Hz
	Load voltage		75 to 125 V AC			75 to 250 V AC		
	Frequency				45 to 65 Hz			
	Repetitive peak voltage		400 V			600 V		
	Non-repetitive surge current				100 A* ³			at 60 Hz
	Max. "OFF-state" leakage current		2.5 mA (when 100 V AC applied)			5 mA (when 200 V AC applied)		
	Max. "ON-state" voltage drop				1.6 V			at max. carrying current
	Min. load current				100 mA* ⁴			
	OFF-state dV/dt				100 V/μs			

2) 15 A type

Items	Part No.	AQR15A1-Z4/ 6VDC	AQR15A1-Z10/ 18VDC	AQR15A1-Z18/ 28VDC	AQR15A2-Z4/ 6VDC	AQR15A2-Z10/ 18VDC	AQR15A2-Z18/ 28VDC	Remarks
Input side	Input voltage	4 to 6V DC	10 to 18V DC	18 to 28V DC	4 to 6V DC	10 to 18V DC	18 to 28V DC	Ta = Max. 40°C 104°F *1
	Input impedance	Approx. 0.26 kΩ	Approx. 0.86 kΩ	Approx. 1.36 kΩ	Approx. 0.26 kΩ	Approx. 0.86 kΩ	Approx. 1.36 kΩ	
	Drop-out voltage, min.				1 V			
Load side	Max. load current				15 A* ²			In one cycle at 60 Hz
	Load voltage		75 to 125 V AC			75 to 250 V AC		
	Frequency				45 to 65 Hz			
	Repetitive peak voltage		400 V			600 V		
	Non-repetitive surge current				150 A* ³			at 60 Hz
	Max. "OFF-state" leakage current		2.5 mA (when 100 V AC applied)			5 mA (when 200 V AC applied)		
	Max. "ON-state" voltage drop				1.6 V			at max. carrying current
	Min. load current				100 mA* ⁴			
	OFF-state dV/dt				100 V/μs			

Notes: *1. Refer to REFERENCE DATA "3. Input current vs. input voltage".

*2. Refer to REFERENCE DATA "1. Load current vs. ambient temperature".

*3. Refer to REFERENCE DATA "2. Non-repetitive surge current vs. carrying time".

*4. When the load current is less than the rated minimum load current, please refer to "Cautions for Use of SSR".



3) 20 A type

Items	Part No.	AQR20A1-Z4/ 6VDC	AQR20A1-Z10/ 18VDC	AQR20A1-Z18/ 28VDC	AQR20A2-Z4/ 6VDC	AQR20A2-Z10/ 18VDC	AQR20A2-Z18/ 28VDC	Remarks
Input side	Input voltage	4 to 6V DC	10 to 18V DC	18 to 28V DC	4 to 6V DC	10 to 18V DC	18 to 28V DC	*1
	Input impedance	Approx. 0.26 kΩ	Approx. 0.86 kΩ	Approx. 1.36 kΩ	Approx. 0.26 kΩ	Approx. 0.86 kΩ	Approx. 1.36 kΩ	
	Drop-out voltage, min.				1 V			
Load side	Max. load current			20 A ^{*2}				Ta = Max. 40°C 104°F
	Load voltage		75 to 125 V AC			75 to 250 V AC		
	Frequency			45 to 65 Hz				
	Repetitive peak voltage		400 V			600 V		
	Non-repetitive surge current			200 A ^{*3}				In one cycle at 60 Hz
	Max. "OFF-state" leakage current		2.5 mA (when 100 V AC applied)			5 mA (when 200 V AC applied)		at 60 Hz
	Max. "ON-state" voltage drop			1.6 V				at max. carrying current
	Min. load current			100 mA ^{*4}				
	OFF-state dV/dt			100 V/μs				

4) 30 A type and 40 A type

Items	Part No.	AQR30A2-S-Z4/ 6VDC	AQR30A2-S-Z10/ 18VDC	AQR30A2-S-Z18/ 28VDC	AQR40A2-S-Z4/ 6VDC	AQR40A2-S-Z10/ 18VDC	AQR40A2-S-Z18/ 28VDC	Remarks
Input side	Input voltage	4 to 6V DC	10 to 18V DC	18 to 28V DC	4 to 6V DC	10 to 18V DC	18 to 28V DC	*1
	Input impedance	Approx. 0.26 kΩ	Approx. 0.86 kΩ	Approx. 1.36 kΩ	Approx. 0.26 kΩ	Approx. 0.86 kΩ	Approx. 1.36 kΩ	
	Drop-out voltage, min.			1 V				
Load side	Max. load current		30 A ^{*2}			40 A ^{*2}		Ta = Max. 40°C 104°F
	Load voltage			75 to 250 V AC				
	Frequency			45 to 65 Hz				
	Non-repetitive surge current		300 A ^{*3}			400 A ^{*3}		In one cycle at 60 Hz
	Max. "OFF-state" leakage current			5 mA (when 200 V AC applied)				at 60 Hz
	Max. "ON-state" voltage drop			1.6 V				at max. carrying current
	Min. load current			120 mA ^{*4}				

Notes: *1. Refer to REFERENCE DATA "3. Input current vs. input voltage".

*2. Refer to REFERENCE DATA "1. Load current vs. ambient temperature".

*3. Refer to REFERENCE DATA "2. Non-repetitive surge current vs. carrying time".

*4. When the load current is less than the rated minimum load current, please refer to "Cautions for Use of SSR".

2. Characteristics (at 20°C 68°F, Input ripple: 1% or less)

Item	Type	Zero-cross type		Remarks
		Standard type	Reinforced type	
Operate time, max.		1/2 cycle of voltage sine wave + 1 ms		
Release time, max.		1/2 cycle of voltage sine wave + 1 ms		
Insulation resistance, min., Initial		100 M Ω between input, output and case		at 500V DC
Breakdown voltage		1,500 V AC between input, output and case	4,000 V AC between input, output and case	For 1 min.
Vibration resistance	Functional	10 to 55 Hz at double amplitude of 2 mm*		1 hour for X, Y, Z axes
	Destructive	10 to 55 Hz at double amplitude of 2 mm*		10 minutes for X, Y, Z axes
Shock resistance	Functional	Min. 980 m/s ² {100 G}		5 time each for X, Y, Z axes
	Destructive	Min. 980 m/s ² {100 G}		4 time each for X, Y, Z axes
Ambient temperature		-20°C to +80°C -4°F to +176°F		
Storage temperature		-25°C to +85°C -13°F to +185°F		
Operational method		Zero-cross (Turn-ON and Turn-OFF)		

Note: *30A and 40A type is 10 to 55 Hz at double amplitude of 1.5 mm .059 inch.



Discontinued as of August 31, 2011

AQ-R

REFERENCE DATA

1. Load current vs. ambient temperature

Use load current within range specified in the figure below.

Tested condition:

With external heat sink

(1) 10 A, 15A, 20 A type


- A heat sink; optional heat sink (AQP-HS-J10A) or a 150×150×3.2 mm aluminum sheet (painted black)
- (2) 30 A, 40 A type
Shown with standard heat sink (AQP-HS-30/40A)

2) If attached to a heat sink, use a heat-conductive compound or similar coating to improve cooling.


Without external heat sink

If the mounting surface is not metallic and a heat sink is not used, expose the bottom surface and plate surface to improve heat dissipation.


The graphs show the characteristics when the relay is mounted as shown in the right figure.

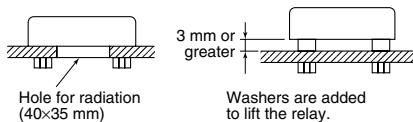


(1) 10 A type

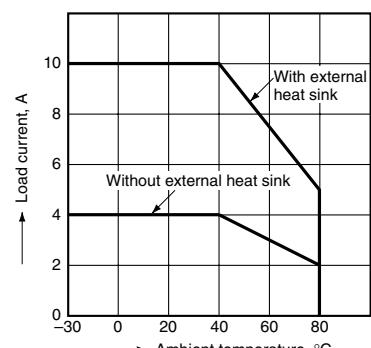


(2) 15 A type

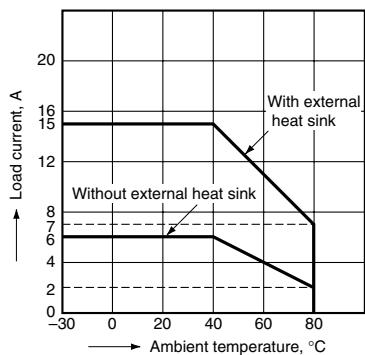


(3) 20 A type

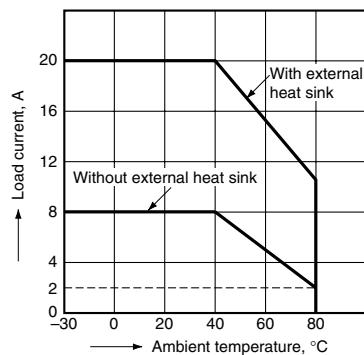


(4) 30 A type

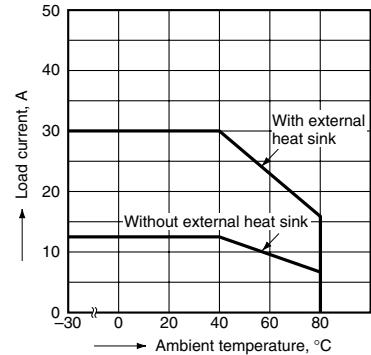


(5) 40 A type

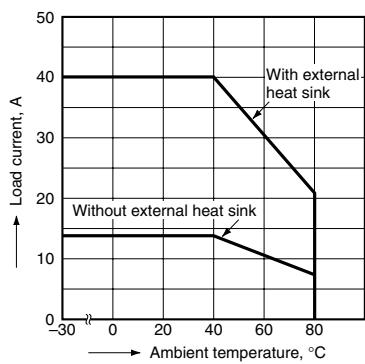


2-1. Non-repetitive surge current vs. carrying time (10 A type)

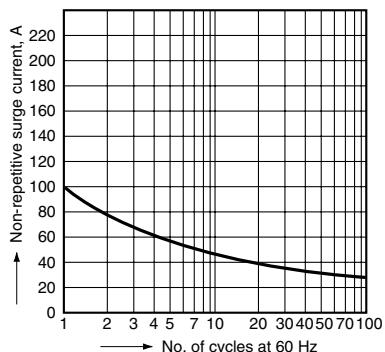


2-2. Non-repetitive surge current vs. carrying time (15 A type)

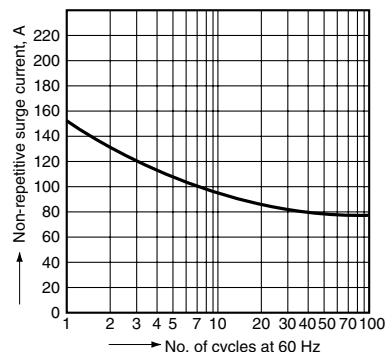


2-3. Non-repetitive surge current vs. carrying time (20 A type)

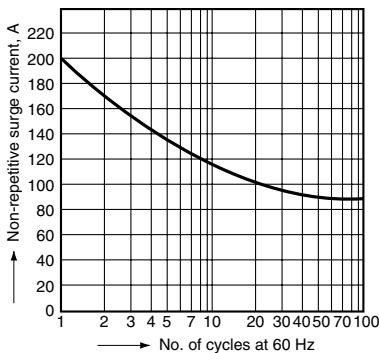

2-4. Non-repetitive surge current vs. carrying time (30 A, 40 A type)

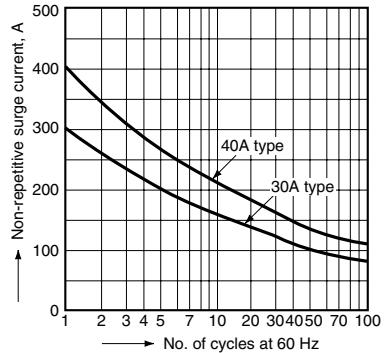

3. Input current vs. input voltage (10 A, 15 A, 20 A, 30 A, 40 A common)

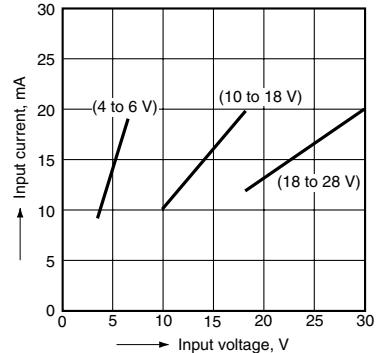



Partly Order Discontinued as of August 31, 2011


AQ-R

DIMENSIONS (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://panasonic-electric-works.net/ac>


1. Tab terminal

CAD Data

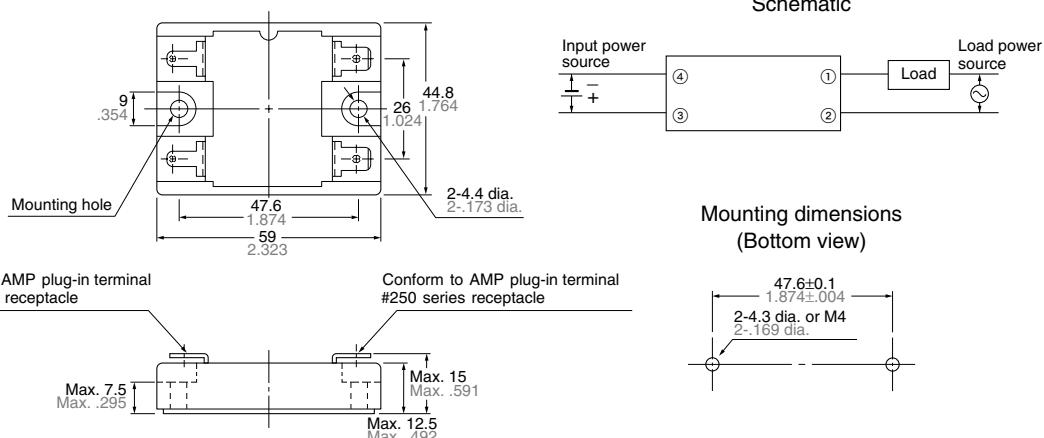

2. Screw terminal


CAD Data

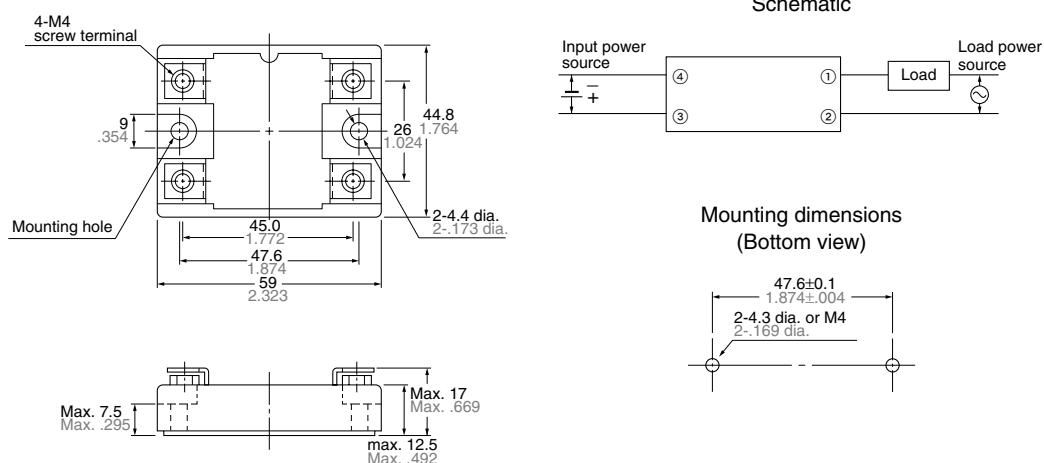


ACCESSORIES

Heat sink (For 10 A, 15A and 20 A)

CAD Data

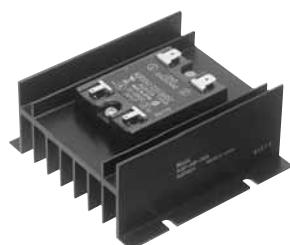

AQP-HS-J10A

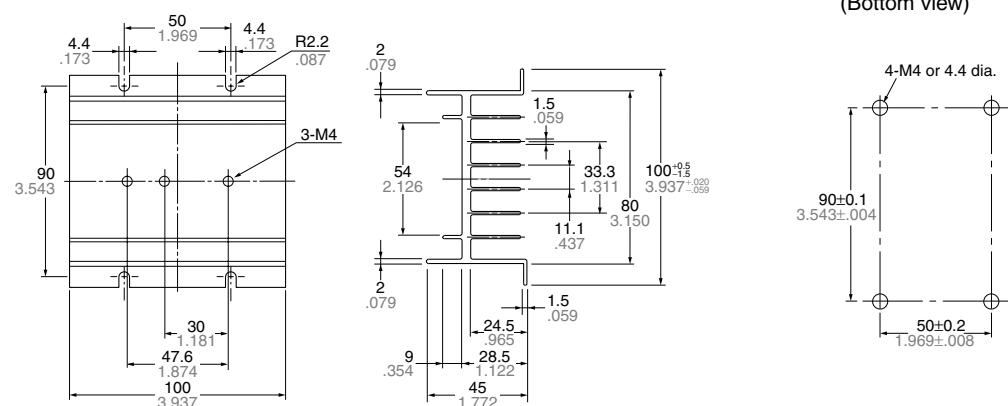



Partly Order Discontinued as of August 31, 2011


AQ-R

Heat sink (For 30 A, 40 A)


CAD Data



AQP-HS-30/40A

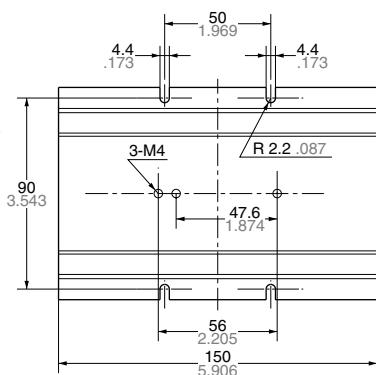


Mounting dimensions (Bottom view)

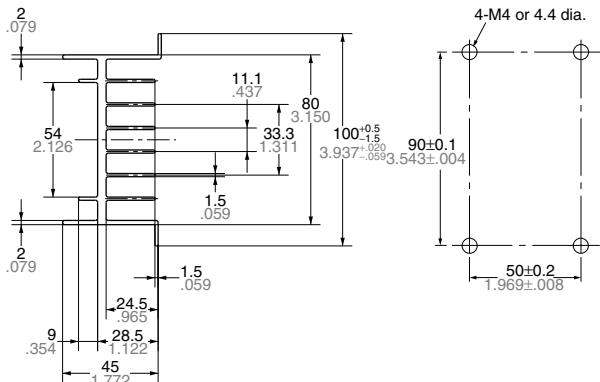



General tolerance: ± 0.5 $\pm .020$

With terminal cover

CAD Data

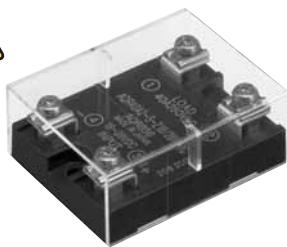

AQP-PC

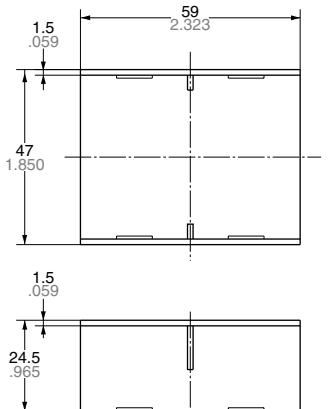


General tolerance: ± 0.5 $\pm .020$

DIN rail mounting plate

CAD Data



AOP-DP

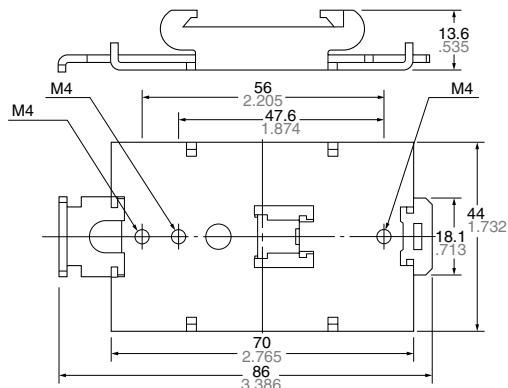


Mounting rail

CAD Data



AT8-DLA1

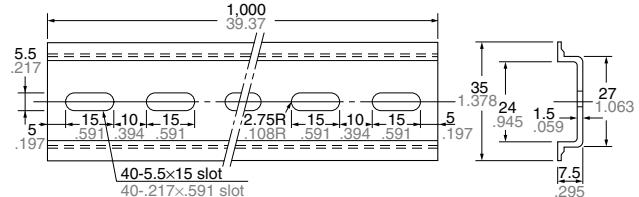

General tolerance: ± 0.5 $\pm .020$


AQ-R

Fastening plate

CAD Data



ATA4806

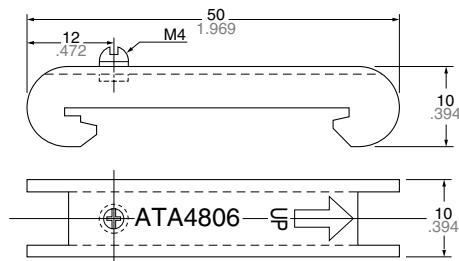

Recommended Temperature Controllers

<KT4H Temperature Controller>

Our temperature controller is recommended for use with our Solid State Relays.

Features

- Data can be collected using the RS485 communications interface via a PLC.
- Improved visibility using a negative type LCD and backlight.
- Depth-wise length (chassis dimension) is 56 mm 2.205 inch.

Substitute part numbers

Power supply	Control output	Part No.
100 to 240 V AC	Relay contact	AKT4H111100

*For detailed product information about temperature controllers, please refer to our website:
http://panasonic-denko.co.jp/ac/e/fasys/component/temperature_controller/

For Cautions for Use.