


MAIN APPLICATION	TYPE	MAGNET	
		Material	Magnet Size (Round)
Telecom	40x30mm	NdFe	Ø12.5x2.5mm


GASKET	MEMBRANE	BASKET	WEIGHT	REMARKS
-	Paper	ABS	13.5g	

ITEM	SPECIFICATIONS	VALUES	TEST CONDITIONS
1	Dimensions	40x28.5mm	per mechanical Drawings
2	Impedance	25Ω ±15%	2kHz / 1.0V
3	Nominal Power	1.0 Watts	
4	Max Power	1.5 Watts	
5	Resonant Frequency	450Hz ±20%	1.0V
6	Sensitivity (S.P.L.)	80dB ±3dB	1W/0.5m (1kHz)
7	Frequency Response	450Hz to 15KHz	1W/0.5m; Tolerance Max 20dB
8	THD	5% max	1kHz 1W/0.5m
9	Storage Temperature	-25°C to +70°C guaranteed range for transportation & storage	
10	Polarity	Membrane move forward when positive DC is applied to the '+' terminal	


PACKAGING	SPECIFICATIONS	
Carton size:		
Qty/Carton:		
Gross Weight:		

ITEM	TEST	TEST CONDITIONS	RESULT
11	Rub & Buzz	Rated Power Sin wave (speaker frequency range)	No Buzzes or Rattles.
12	High Voltage Resistance	100VAC / 1mn between terminals and frame.	Must be normal
13	Insulation Resistance	100VDC between terminals and frame.	≥ 1MΩ
14	Load	White Noise at Rated Power for 96h	After 1 hour of rest at room ambient conditions, speakers must meet specs items 2, 5, 6.
15	High Temp.	+60±3°C for 96h (random 20%-50%RH)	
16	Low Temp.	-25±3°C for 96h (random 20%-50%RH)	
17	Humidity	+40±3°C ambient and 90%RH for 96h	

Mechanical Drawings (in mm)

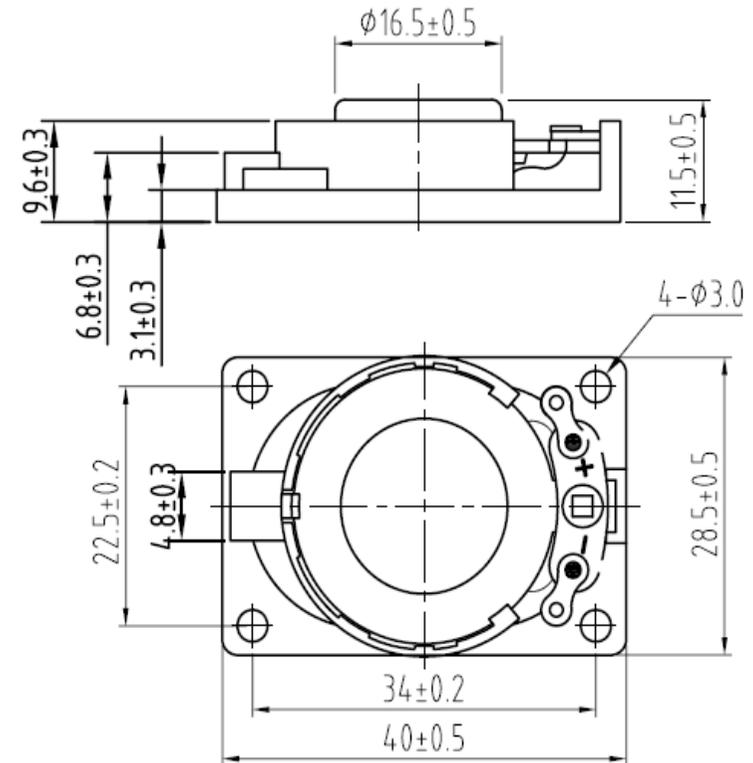

Typical Frequency Response

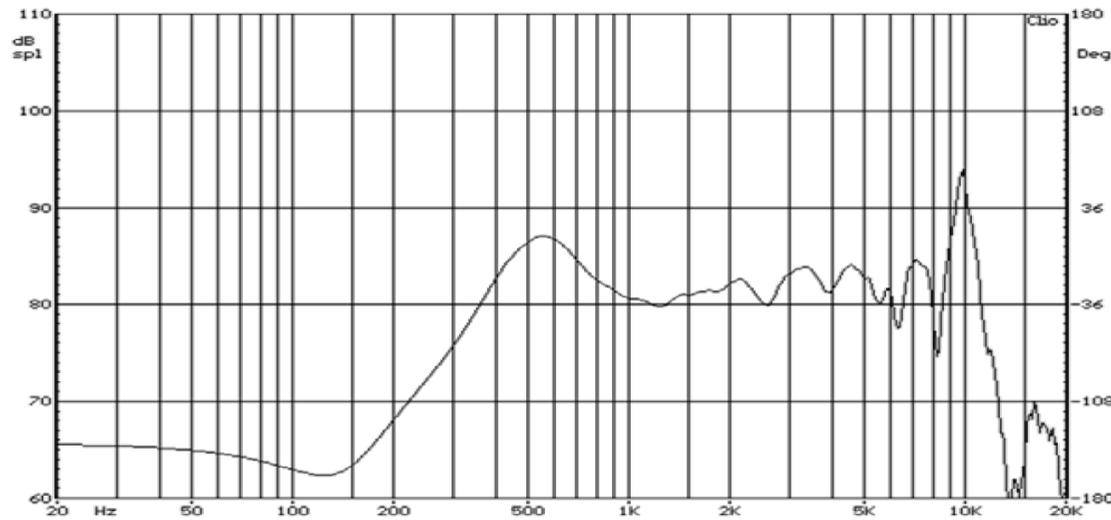

Measured on axis at a distance of 0.5m with 1W input power

Property of Seltech. Specifications subject to change without notice. www.seltech-international.com

Part n°		RoHS Compliance	
 SOR4030S11ZN25		Yes	
REV	DATE	SHEET	RoHS Compliance
0.3	19/05/2015	1 of 1	Yes