SPECIFICATIONS


"Preliminary data"

Model Number: CR0205MB-G50(GLT)

Part Number: 17000195A Apr 11, 2017



Mechanical Drawing:

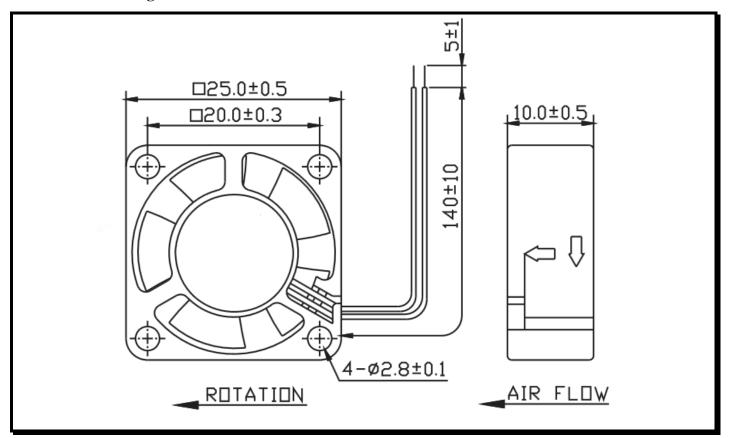

Motor:

Nominal Voltage = 5 VDC
Nominal Running Current = 0.09 Amps
Power Input = 0.45 Watts
Speed = 10000 RPM

 $\begin{array}{ll} \text{Bearings} & = \text{Ball} \\ \text{Air Flow} & = 2.1 \text{ CFM} \end{array}$

Static Pressure: = 0.15 Inch of H2O

Acoustic = 23 dB(A)Weight = 8.0 g

Construction:

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

Life Expectancy:

This fan is designed for continuous duty life of 70,000

hours at 40°C.

Additional Features:

Brushless DC Motor Locked Rotor Protection Polarity Protected

Automatic Restart Capability

Version:

Operating Temperature: -10° C to 70° C Storage Temperature: -40° C to 70° C

Termination:

 140 ± 10 mm Lead wires, AWG 28, UL 1571

Agency Approvals: UL, CUL, TUV, CE