


**Miniature SSOP
CxR10: 30 V and 40 V load
voltage
CxR5: 25 V load voltage**

**PhotoMOS®
RF SSOP 1 Form A CxR10/CxR5
(AQY221OOV)**



mm inch




RoHS compliant

FEATURES

1. Miniature package (SSOP) using a new flat lead terminal shape

Compared to previous models (SOP 4-pin), mounting area can be reduced by approximately 53%*. This contributes to improved output signal transit characteristics.



*Comparison of area of SSOP and SOP 4-pin (including leads).

2. Both low on-resistance (R type) and low capacitance (C type) available at excellent characteristics of CxR10

		On resistance (Typical)	Output capacitance (Typical)
New	AQY221R6V	0.18Ω	37.5pF
CxR10 R type	AQY221R4V	0.55Ω	24pF
	AQY221R2V	0.75Ω	12.5pF
	AQY221N2V	9.5Ω	1.0pF
CxR10 C type	AQY221N3V	5.5Ω	1.0pF
CxR5			

TYPICAL APPLICATIONS

1. Measuring and testing equipment

Semiconductor testing equipment, Probe cards, Datalogger, Board tester and other testing equipment

2. Telecommunication and broadcasting equipment

3. Medical equipment

TYPES

Type			Output rating*1		Package	Tape and reel packing style*2		Packing quantity in tape and reel
			Load voltage	Load current		Picked from the 1 and 4-pin side	Picked from the 2 and 3-pin side	
AC/DC dual use	CxR10	Low on-resistance (R type)	30 V	1,000 mA	SSOP	AQY221R6VY	AQY221R6VW	3,500 pcs.
			40 V	500 mA		AQY221R4VY	AQY221R4VW	
		Low capacitance (C type)	40 V	250 mA		AQY221R2VY	AQY221R2VW	
	CxR5	40 V	120 mA			AQY221N2VY	AQY221N2VW	
		25 V	150 mA			AQY221N3VY	AQY221N3VW	

Notes: *1. Indicate the peak AC and DC values.

*2. Tape and reel is the standard packing style for SSOP. Packing quantity of 1,000 pieces is possible. Please consult us.

For space reasons, the three initial letters of the part number "AQY", the package (SSOP) indication "V", and the packaging style "Y" or "W" are not marked on the device. (Ex. the label for product number AQY221R4VY is 221R4)

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	CxR10 R type			CxR10 C type	CxR5	Remarks
		AQY221R6V	AQY221R4V	AQY221R2V	AQY221N2V	AQY221N3V	
Input	LED forward current	I _F		50mA			
	LED reverse voltage	V _R		5V			
	Peak forward current	I _{FP}		1A			f=100 Hz, Duty factor=0.1%
	Power dissipation	P _{in}		75mW			
Output	Load voltage (peak AC)	V _L	30V	40V	25V		
	Continuous load current	I _L	1A	0.5A	0.25A	0.12A	0.15A
	Peak load current	I _{peak}	1.5A	1A	0.75A	0.3A	0.4A
	Power dissipation	P _{out}		250mW			100ms (1shot), V _L =DC
Total power dissipation	P _T			300mW			
I/O isolation voltage	V _{iso}			1,500V AC			
Operating temperature	T _{opr}			-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures
Storage temperature	T _{stg}			-40°C to +100°C -40°F to +212°F			

RF SSOP 1 Form A CxR10/CxR5 (AQY221OOV)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)


Item			Symbol	CxR10 R type		CxR10 C type	CxR5	Condition			
	AQY221R6V	AQY221R4V		AQY221R2V	AQY221N2V	AQY221N3V					
Input	LED operate current	Typical	I _{Fon}	0.7 mA	0.9 mA		1.0 mA	AQY221R6V: I _f = 100 mA AQY221R4V: I _f = 500 mA AQY221R2V: I _f = 250 mA AQY221N2V: I _f = 80 mA AQY221N3V: I _f = 80 mA			
		Maximum		3.0 mA							
Input	LED turn off current	Minimum	I _{Foff}	0.1 mA		0.2 mA		AQY221R6V: I _f = 100 mA AQY221R4V: I _f = 500 mA AQY221R2V: I _f = 250 mA AQY221N2V: I _f = 80 mA AQY221N3V: I _f = 80 mA			
		Typical		0.6 mA	0.8 mA		0.9 mA				
Input	LED dropout voltage	Typical	V _F	1.35 V (1.14 V at I _f = 5 mA)				I _f = 50 mA			
		Maximum		1.5 V							
Output	On resistance	Typical	R _{on}	0.18Ω	0.55Ω	0.75Ω	9.5Ω	5.5Ω			
		Maximum		0.35Ω	1Ω	1.25Ω	12.5Ω	7.5Ω			
	Output capacitance	Typical	C _{out}	37.5 pF	24 pF	12.5 pF	1.0 pF				
		Maximum		100 pF	30 pF	18 pF	1.5 pF				
	Off state leakage current	Typical	I _{Leak}	—		0.02 nA		I _f = 0 mA, V _B = 0 V, f = 1 MHz			
		Maximum		10 nA (1 nA or less)*							
Transfer characteristics	Turn on time**	Typical	T _{on}	0.2 ms	0.25 ms	0.10 ms	0.02 ms				
		Maximum		0.5 ms	0.75 ms	0.5 ms		0.2 ms			
	Turn off time**	Typical	T _{off}	0.07 ms	0.08 ms		0.02 ms				
		Maximum		0.2 ms	0.2 ms						
	I/O capacitance	Typical	C _{iso}	0.8 pF				f = 1 MHz, V _B = 0 V			
		Maximum		1.5 pF							
	Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ				500 V DC			

Notes: 1. Please refer to the "Schematic and Wiring Diagrams" for connection method.

2. Variation possible through combinations of output capacitance and on resistance. For more information, please contact our sales office in your area.

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

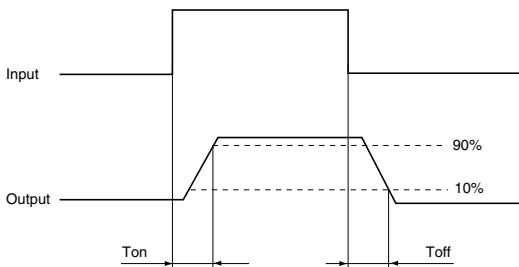

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _f	5	mA


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

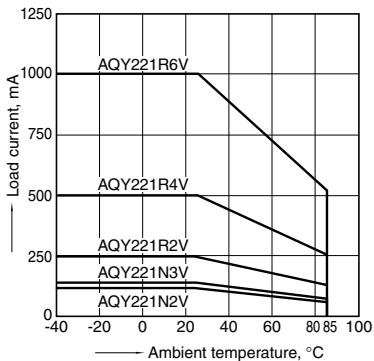


2. Load current vs. Load voltage characteristics

Ambient temperature: 25°C 77°F

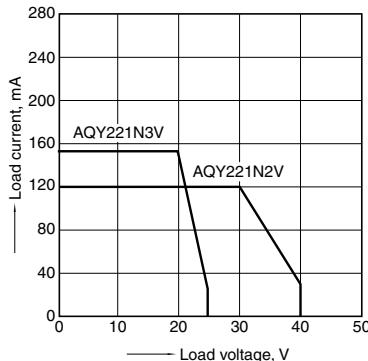


3. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4
LED current: 5 mA; Load voltage: 10V (DC)
Continuous load current: 1000mA (DC) AQY221R6V,
500mA (DC) AQY221R4V, 250mA (DC) AQY221R2V,
80mA (DC) AQY221N2V, AQY221N3V

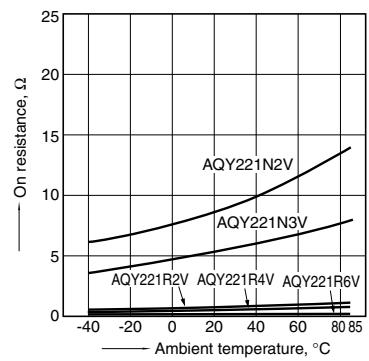


4. Turn on time vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4
LED current: 5 mA; Load voltage: 10V (DC)
Continuous load current: 100mA (DC) AQY221R6V,
500mA (DC) AQY221R4V, 250mA (DC) AQY221R2V,
80mA (DC) AQY221N2V, AQY221N3V

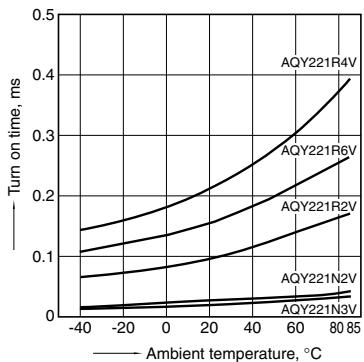


5. Turn off time vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4
LED current: 5 mA; Load voltage: 10V (DC)
Continuous load current: 100mA (DC) AQY221R6V,
500mA (DC) AQY221R4V, 250mA (DC) AQY221R2V,
80mA (DC) AQY221N2V, AQY221N3V

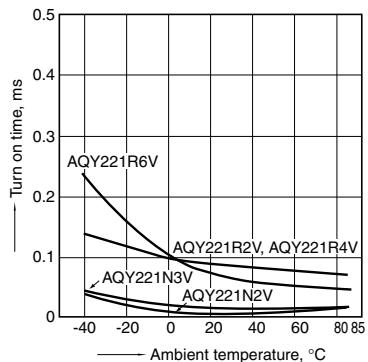


6. LED operate current vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC)
Continuous load current: 100mA (DC) AQY221R6V,
500mA (DC) AQY221R4V, 250mA (DC) AQY221R2V,
80mA (DC) AQY221N2V, AQY221N3V

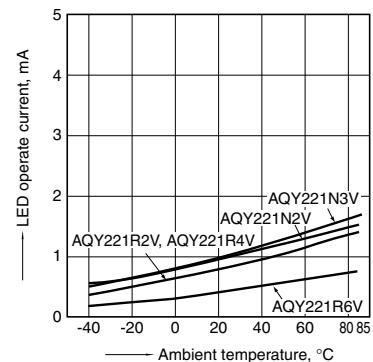


7. LED turn off current vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC)
Continuous load current: 100mA (DC) AQY221R6V,
500mA (DC) AQY221R4V, 250mA (DC) AQY221R2V,
80mA (DC) AQY221N2V, AQY221N3V

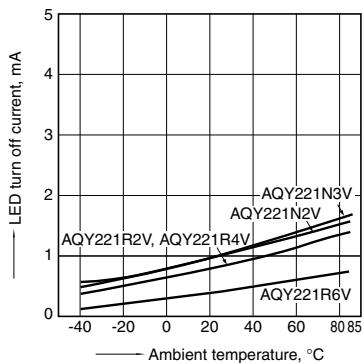


8. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

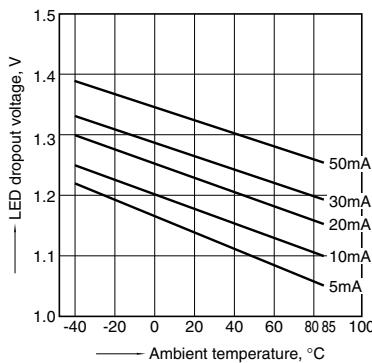

9. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F




RF SSOP 1 Form A CxR10/CxR5 (AQY221OOV)

10. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4

Ambient temperature: 25°C 77°F

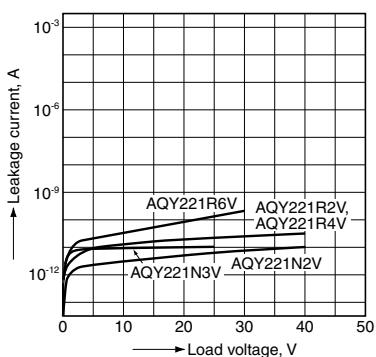


13. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4

Frequency: 1 MHz, 30m Vrms

Ambient temperature: 25°C 77°F

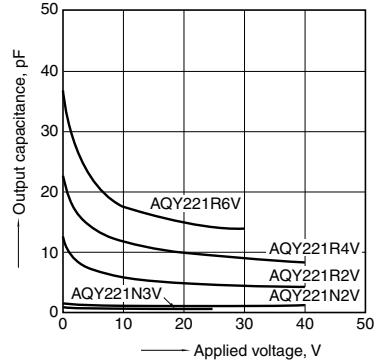


11. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4

Load voltage: 10V (DC)

Continuous load current: 100mA (DC) AQY221R6V, 500mA (DC) AQY221R4V, 250mA (DC) AQY221R2V, 80mA (DC) AQY221N2V, AQY221N3V

Ambient temperature: 25°C 77°F

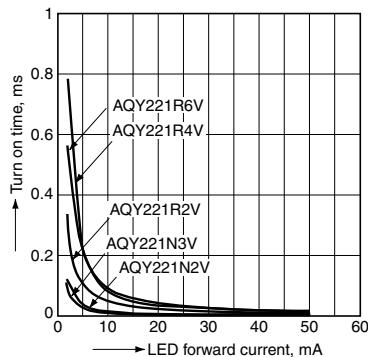


12. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4

Load voltage: 10V (DC)

Continuous load current: 100mA (DC) AQY221R6V, 500mA (DC) AQY221R4V, 250mA (DC) AQY221R2V, 80mA (DC) AQY221N2V, AQY221N3V

Ambient temperature: 25°C 77°F

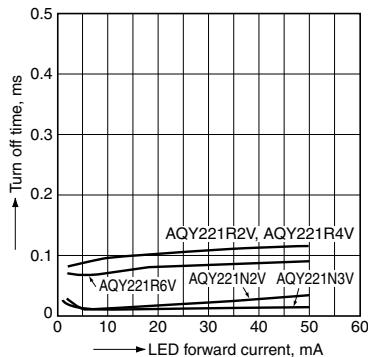


13. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4

Frequency: 1 MHz, 30m Vrms


Ambient temperature: 25°C 77°F

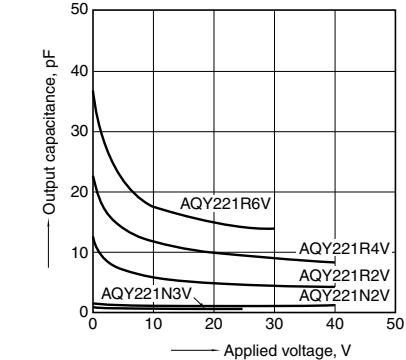

14. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4

Ambient temperature: 25°C 77°F

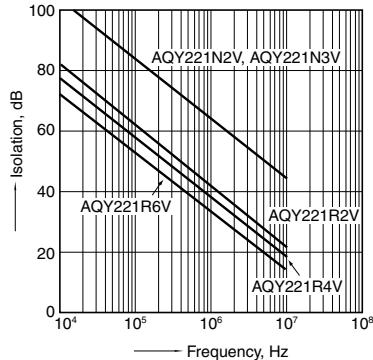

15. Insertion loss vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4

Ambient temperature: 25°C 77°F

