



**Both N.O. and N.C. contacts
incorporated in a small
SOP8-pin package**

**PhotoMOS®
GU SOP 1 Form A & 1 Form B
(AQW610S)**



mm inch



RoHS compliant

FEATURES

1. Normally open and normally closed contacts in a SOP package

The device comes in a miniature SOP measuring (W) 4.4 × (L) 9.37 × (H) 2.1 mm (W) .173× (L) .369× (H) .083 inch — approx. 38% of the volume and 66% of the footprint size of DIP type.

2. 60V type couples high capacity (0.45A) with low on-resistance (Typ. 1Ω) (AQW612S).

3. Applicable for 1 Form A and 1 Form B use as well as two independent 1 Form A and 1 Form B use

4. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion

5. Low-level off-state leakage current of max. 1 μA

TYPICAL APPLICATIONS

- Power supply
- Measuring equipment
- Security equipment
- Telephone equipment
- Computer input machines
- Industrial robots

TYPES

AC/DC dual use	Output rating*		Package	Part No.			Packing quantity		
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel	
					Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side			
AC/DC dual use	60V	450mA	SOP8-pin	AQW612S	AQW612SX	AQW612SZ	1 tube contains: 50 pcs. 1 batch contains: 1,000 pcs.	1,000 pcs.	
	350V	100mA		AQW610S	AQW610SX	AQW610SZ			

* Indicate the peak AC and DC values.

Note: The packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item	Symbol	AQW612S	AQW610S	Remarks	
Input	LED forward current	I _F	50 mA	f = 100 Hz, Duty factor = 0.1%	
	LED reverse voltage	V _R	5 V		
	Peak forward current	I _{FP}	1 A		
	Power dissipation	P _{in}	75 mW		
Output	Load voltage (peak AC)	V _L	60 V	Peak AC, DC (): in case of using only 1a or 1b, 1 channel	
	Continuous load current	I _L	0.45 A (0.55 A)		
	Peak load current	I _{peak}	1.5 A		
	Power dissipation	P _{out}	600 mW		
Total power dissipation	P _T	650 mW			
I/O isolation voltage	V _{iso}	1,500 Vrms			
Ambient temperature	Operating	T _{opr}	-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)	
	Storage	T _{stg}	-40 to +100°C -40 to +212°F		

GU SOP 1 Form A & 1 Form B (AQW61OS)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW612S	AQW610S	Condition
Input	LED operate current	Typical Maximum	I_{Fon} (N.O.) I_{Foff} (N.C.)	0.9 mA 3 mA	$I_L = \text{Max.}$
	LED reverse current	Minimum Typical	I_{Foff} (N.O.) I_{Fon} (N.C.)	0.4 mA 0.8 mA	$I_L = \text{Max.}$
	LED dropout voltage	Typical Maximum	V_F	1.25 V (1.14 V at $I_F = 5 \text{ mA}$) 1.5 V	$I_F = 50 \text{ mA}$
			R_{on}	1 Ω 2.5 Ω	$I_F = 5 \text{ mA (N.O.)}$ $I_F = 0 \text{ mA (N.C.)}$ $I_L = \text{Max. Within 1 s}$
Output	Off state leakage current	Maximum	I_{Leak}	1 μA	$I_F = 0 \text{ mA (N.O.)}$ $I_F = 5 \text{ mA (N.C.)}$ $V_L = \text{Max.}$
Transfer characteristics	Operate time*	Typical Maximum	T_{on} (N.O.) T_{off} (N.C.)	0.65 ms (N.O.), 0.9 ms (N.C.) 3.0 ms	$I_F = 0 \text{ mA} \rightarrow 5 \text{ mA}$ $I_L = \text{Max.}$
	Reverse time*	Typical Maximum	T_{off} (N.O.) T_{on} (N.C.)	0.08 ms (N.O.), 0.2 ms (N.C.) 1.0 ms	$I_F = 5 \text{ mA} \rightarrow 0 \text{ mA}$ $I_L = \text{Max.}$
	I/O capacitance	Typical Maximum	C_{iso}	0.8 pF 1.5 pF	$f = 1 \text{ MHz}$ $V_b = 0 \text{ V}$
	Initial I/O isolation resistance	Minimum	R_{iso}	1,000 MΩ	500 V DC

*Operate/Reverse time

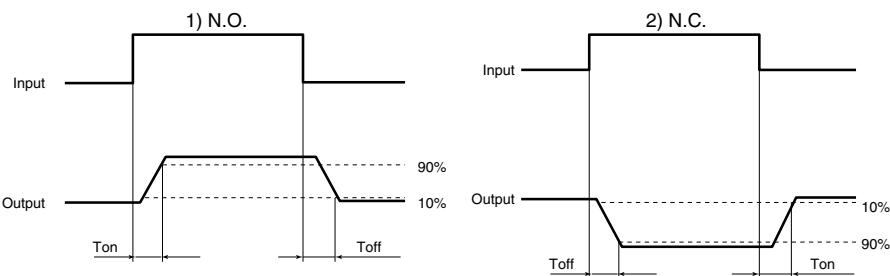

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Number of used channels	Min.	Max.	Unit
AQW612S	LED current	I_F	5	30	mA
	Load voltage (Peak AC)	V_L	—	48	V
	Continuous load current	I_L	1ch 2ch	0.55 0.45	A
AQW610S	Load voltage (Peak AC)	V_L	—	280	V
	Continuous load current	I_L	1ch 2ch	0.13 0.1	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

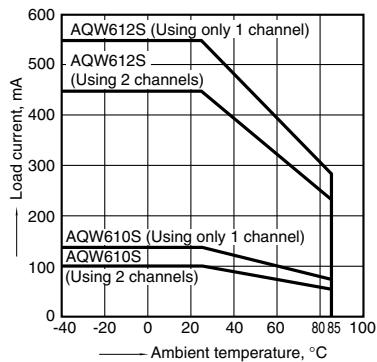


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

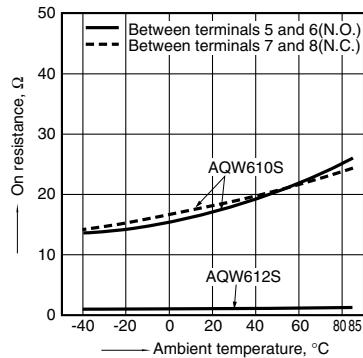


3. Operate time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

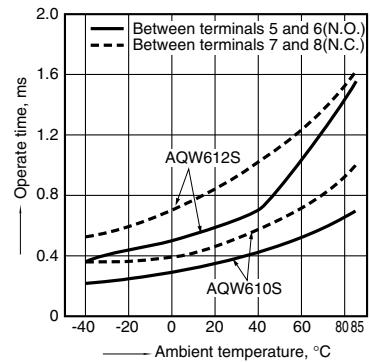


4. Reverse time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

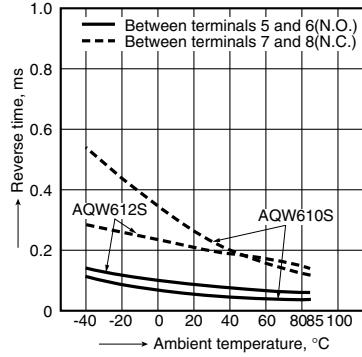


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

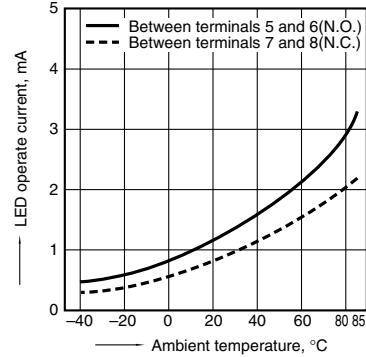


6. LED reverse current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

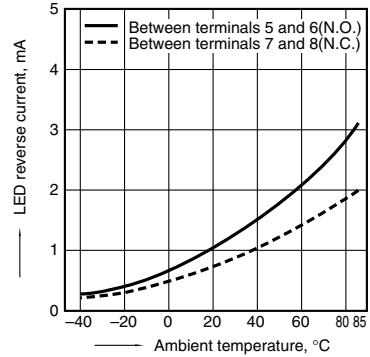


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

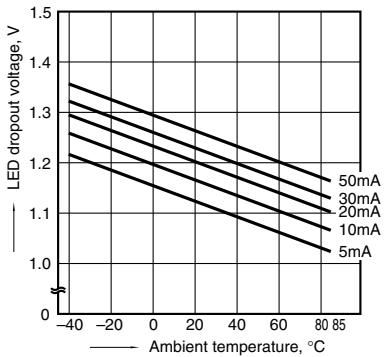


8-(1). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F




8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F




9-(1). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

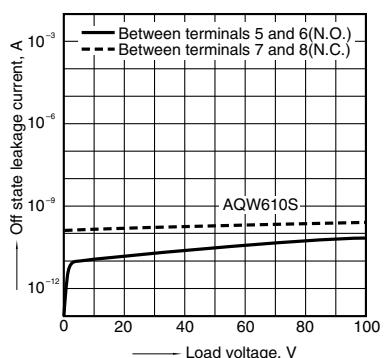


9-(2). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

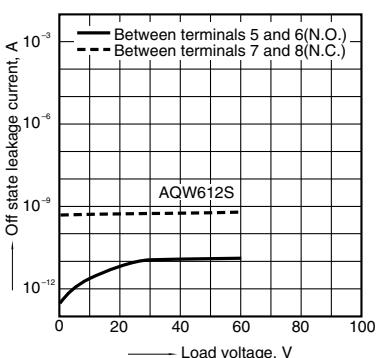

10. Operate time vs. LED forward current characteristics


Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

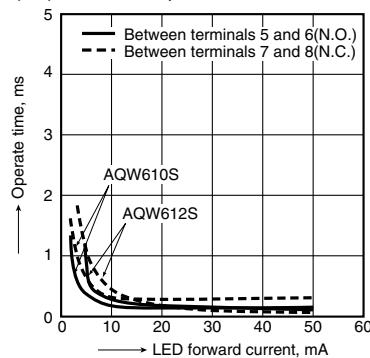

GU SOP 1 Form A & 1 Form B (AQW61OS)


11. Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

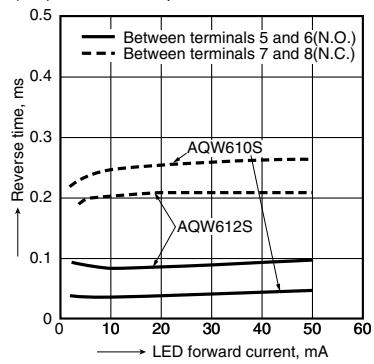

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 0 mA (N.O.), 5 mA (N.C.); Frequency:
1 MHz; Ambient temperature: 25°C 77°F

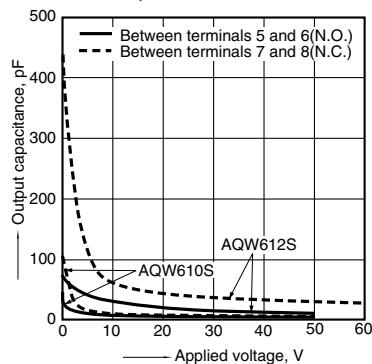

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017