


Eveready 1215

AA
SUPER HEAVY DUTY



Industry Standard Dimensions

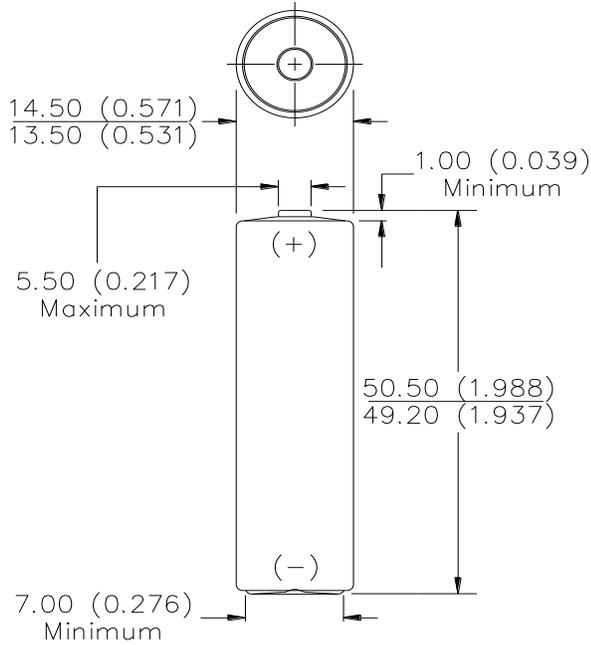

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)

Designation: ANSI-15D, IEC-R6

Battery Voltage: 1.5 Volts

Operating Temp: -18°C to 55°C (0°F to 130°F)

Average Weight: 15.0 grams (0.5 oz.)

Volume: 8.0 cubic centimeters (0.5 cubic inch)

Average Capacity: 1,100 mAh to 0.8 volts
(Rated capacity at 25 mA continuous at 21°C)

Cell: One No. 15 (size "AA")

Jacket: Metal


INTERNAL RESISTANCE VS. TEMPERATURE

The measurement is an approximation of the battery's actual internal resistance. It is sensitive to the loads and operator technique.


Schedule: Background Load 750 ohms
Pulse Load 4.0 ohms
Pulse Duration 1 second

| Temperature | Typical Ri (ohms) |
|--------------|-------------------|
| 45°C (113°F) | 0.4 |
| 21°C (70°F) | 0.5 |
| 0°C (32°F) | 0.8 |
| -21°C (-4°F) | 5.0 |

CONSTANT RESISTANCE PERFORMANCE
Typical Service

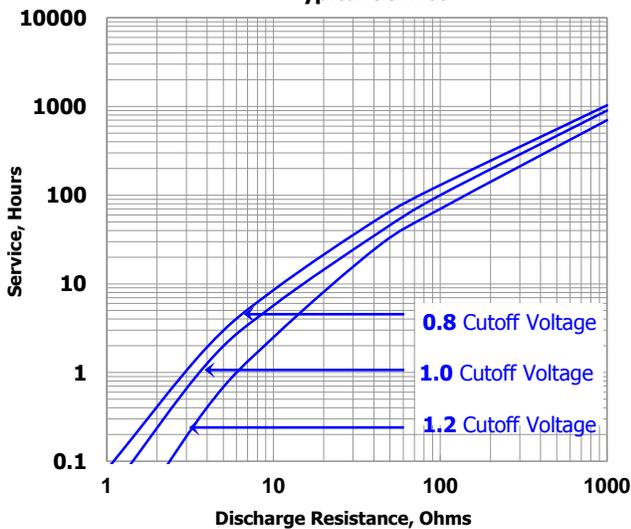

CONSTANT CURRENT DISCHARGE
Typical Service

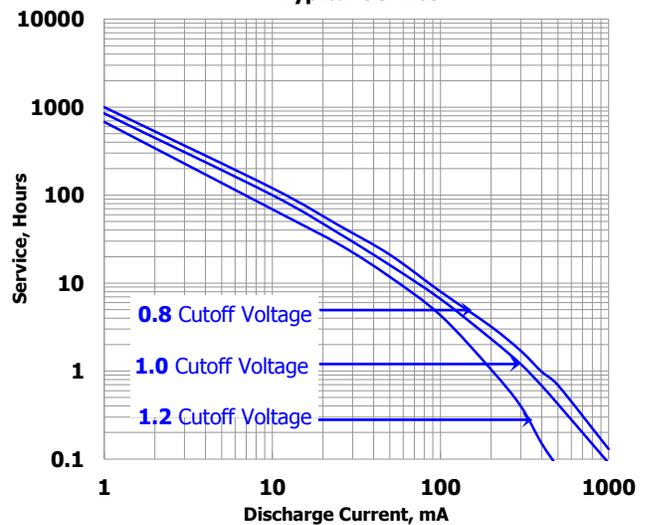

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.

Eveready 1215

ANSI Industry Standard Tests @ 20° C

RADIO
43 ohm - 4 hours/day



RECORDER
10 ohm - 1 hr/day



TOY
3.9 ohm - 1 hr/day



PULSE TEST
1.8 ohms - 15sec/min 24 hours/day



Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.