
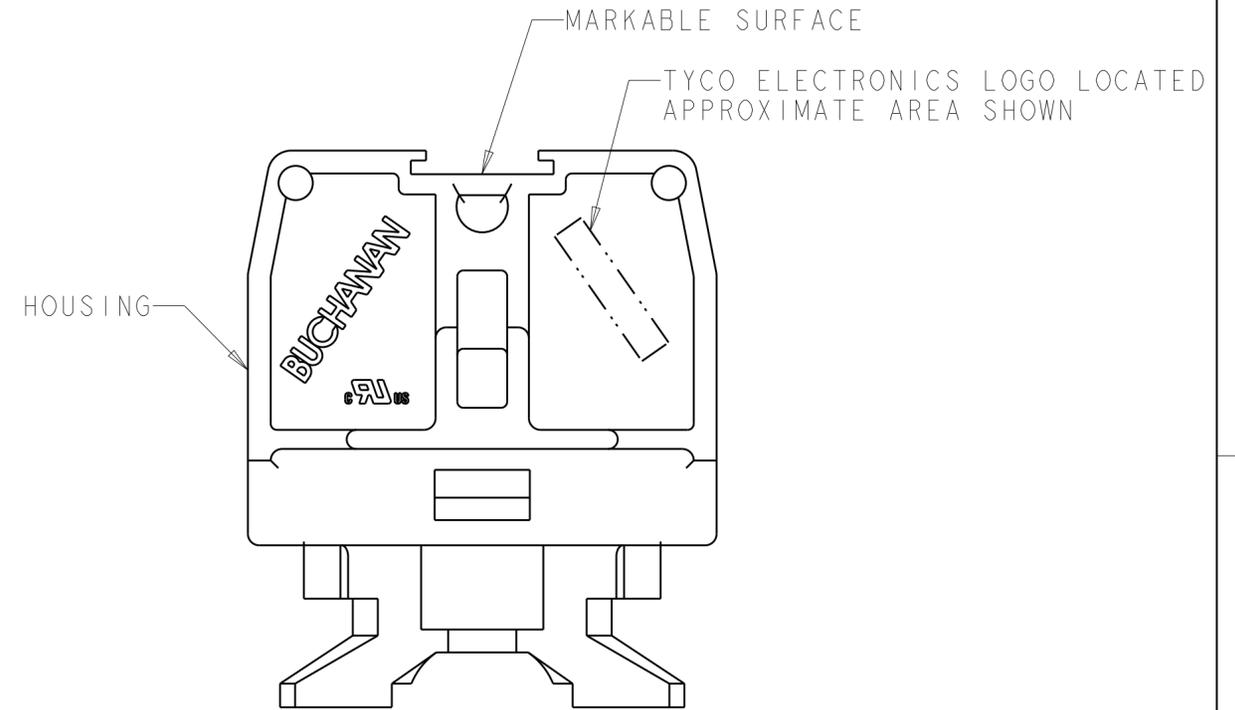
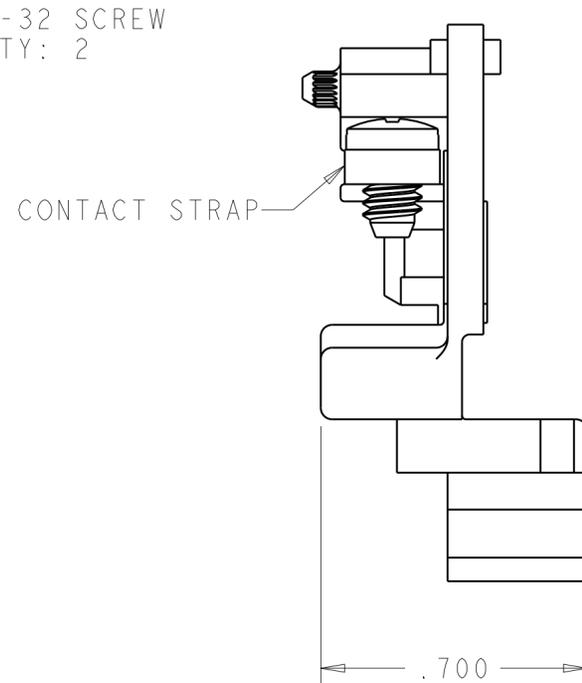
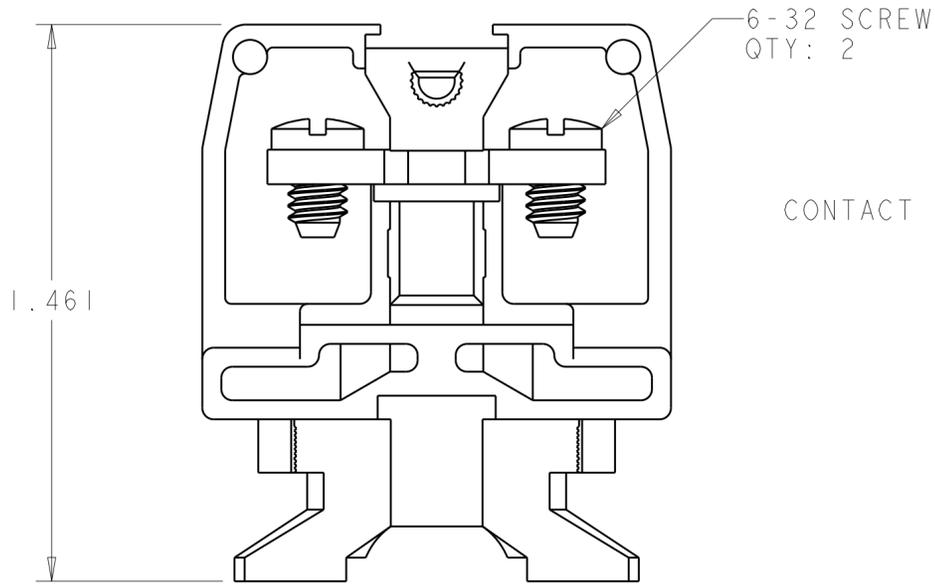


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

| REVISIONS | | | | |
|-----------|-----|---------------------------|-----------|-------|
| P | LTR | DESCRIPTION | DATE | APVD |
| G | | REVISED PER ECO-13-011850 | 11NOV2013 | KH MB |
| | | | | |
| | | | | |

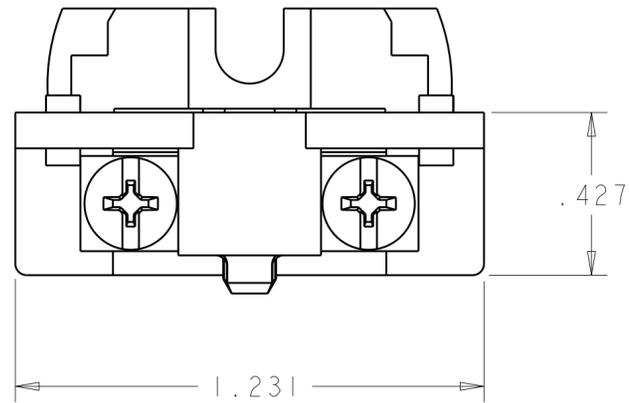

- 1. PHYSICAL PROPERTIES (STANDARD)
 HOUSING: POLYESTER, UL 94V-0 RATED, COLOR: GRAY.
 CONTACT STRAP: COPPER ALLOY, ZINC PLATED.
 SCREW: STEEL, ZINC PLATED CLEAR CHROMATE.
- 2. PHYSICAL PROPERTIES (DURAMAX)
 HOUSING: POLYESTER, UL 94V-0 RATED, COLOR: GRAY.
 CONTACT STRAP: COPPER ALLOY, NICKEL PLATED.
 SCREW: COPPER ALLOY, NICKEL PLATED.
- 3. MECHANICAL
 PITCH: .375
 MOUNTING: STANDARD CHANNEL AND CLAMP.
 OPERATING TEMPERATURE: 150°C MAX.
 TORQUE: RECOMMENDED TIGHTENING TORQUE IS 12 IN-LBS.
- 4. ELECTRICAL
 MAXIMUM CURRENT: 15A, 35A*
 OPERATING VOLTAGE: 600 V
 WIRE RANGE: 14-22 AWG, 10 AWG*.
 * ACCEPTABLE FOR 35A MAXIMUM CURRENT, FACTORY WIRING ONLY, WHEN USED WITH 10 AWG WIRE PRE-TERMINATED WITH SUITABLE RING TONGUE TERMINALS.
- 5. SEE RESTRICTED CUSTOMER DRAWING 4-1437394-5.

| | | | |
|-------------------|---|-------------|---|
| OBSOLETE | - | 4-1437394-5 | 5 |
| OBSOLETE | 2 | 1546144-2 | |
| | 1 | 1546144-1 | |
| MATERIAL / FINISH | | PART NUMBER | |

| | | | | |
|--|--|-------------------------|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN S. WELDON 13JUN2002 | STE TE Connectivity | |
| DIMENSIONS: INCHES | | CHK S. YODER 13JUN2002 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD S. YODER 13JUN2002 | NAME ASSEMBLY, TERMINAL BLOCK, NEMA, DOVETAIL BASE, MEDIUM DUTY, STRAP SCREW | |
| 0 PLC ± | | PRODUCT SPEC - | SIZE CAGE CODE DRAWING NO RESTRICTED TO | |
| 1 PLC ± | | APPLICATION SPEC - | A200779 C-1546144 | |
| 2 PLC ± | | WEIGHT - | SCALE 3:1 SHEET OF REV G | |
| 3 PLC ±.010 | | | | |
| 4 PLC ± | | | | |
| ANGLES ± | | | | |
| FINISH | | | | |
| MATERIAL SEE TABLE | | | | |
| SEE TABLE | | | | |