
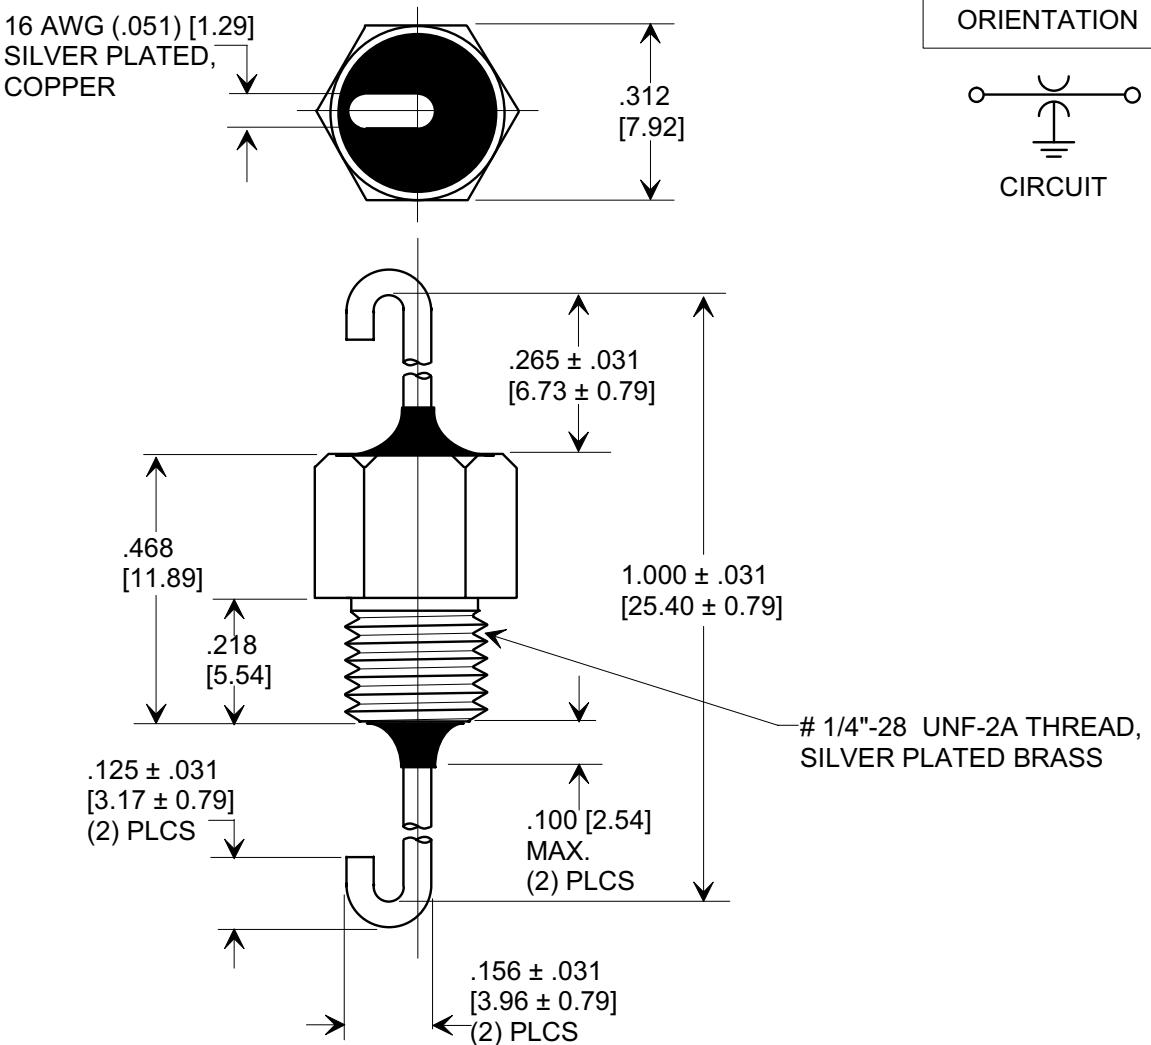


Electrical Testing
per Tucsonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

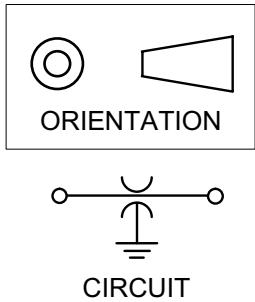

SPECIFICATIONS

Style No:	2443-007										
Value:	5000 pF										
Value Tol.:	+ 80% -20%										
Temp. Coef.:	X5W										
Rating:	500 WVDC @ 85°C										
Operating Range:	-55°C TO +85°C										
To Tucsonix Spec Unless Stated Otherwise - See Note 2	"Typical", No Load Insertion Loss (dB) @ 25°C per MIL-STD - 220 <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <th>10 MHz</th> <th>100 MHz</th> <th>1 GHz</th> <th>10 GHz</th> </tr> <tr> <td>15</td> <td>30</td> <td>45</td> <td>50</td> </tr> </table>			10 MHz	100 MHz	1 GHz	10 GHz	15	30	45	50
10 MHz	100 MHz	1 GHz	10 GHz								
15	30	45	50								

NOTES:

1. SUPPLIED WITH SILVER PLATED HEX NUT AND LOCK WASHER, BULK PACKAGED.
2. INSERTION LOSS TEST NOT LOT INSPECTED, VALUES ARE TYPICAL ONLY FOR REFERENCE.

REVISION RECORD	Original Release C.O. 20010914-1-01		--TOLERANCES-- Unless Otherwise Specified	Title
			DECIMAL ± .015 [0.38]	BUSHING STYLE FEED-THRU CAPACITOR
			ANGLES ±	Drawn L.E. 09-19-01
				Approved B.Mc. 09-19-01 Scale 3X
			TUSONIX TUCSON, ARIZONA	A 2443-007-X5W0-502Z