





Features:

- DC 6.0 GHz
- 40 Watts
- **BeO Ceramic**
- **Non-Nichrome Resistive Element**
- Low VSWR
- 100% Tested

Flangeless Termination 40 Watts, 50Ω

General Specifications

Resistive Element	Thick film
Substrate	Beryllium oxide ceramic
Cover	Alumina Ceramic
Lead(s):	99.9% pure silver (.006 thick)
Terminals	Thick film silver

Electrical Specifications

Resistance Range: 50 ohms, ± 5% Frequency Range; DC - 6.0 GHz Power: 40 Watts


VSWR 1.25:1 DC - 6.0 GHz

Note: Tolerance is ± 0.010 ", unless otherwise specified. Designed to meet of exceed applicable portions of MIL-E-5400. Operating temperature is -55 $^{\circ}$ C to 150°C (see chart for derating temperatures).

All dimensions in inches.

Specifications subject to change with out notice.

Outline Drawing

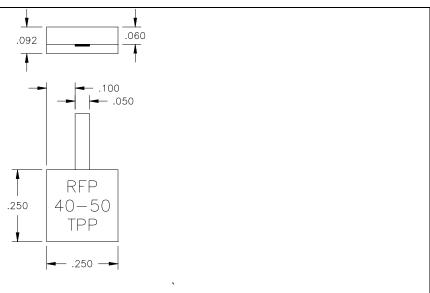

40-50TPP (097) Rev A






Available on Tape and Reel For Pick and Place Manufacturing.


USA/Canada: (315) 432-8909 Toll Free: (800) 544-2414 Europe: +44 2392-232392






Typical Performance:

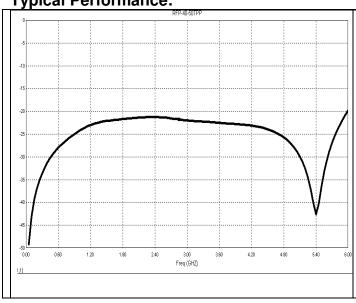


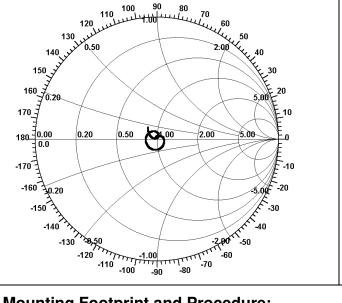

Power De-rating:

Mounting Footprint and Procedure:

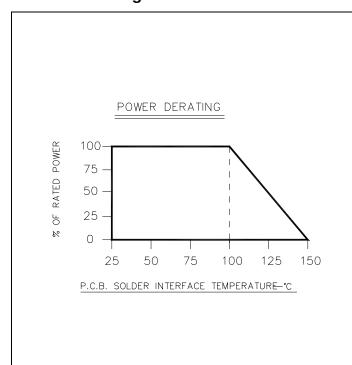

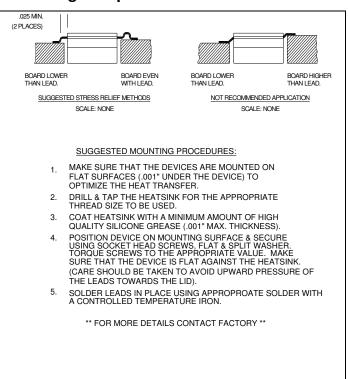

40-50TPP (097) Rev A

USA/Canada: Toll Free: Europe: (315) 432-8909 (800) 544-2414 +44 2392-232392 Available on Tape and Reel For Pick and Place Manufacturing.

