


Ratings

Maximum Operating Voltage: 48 Vdc
 Maximum Operating Current: 5.5 A

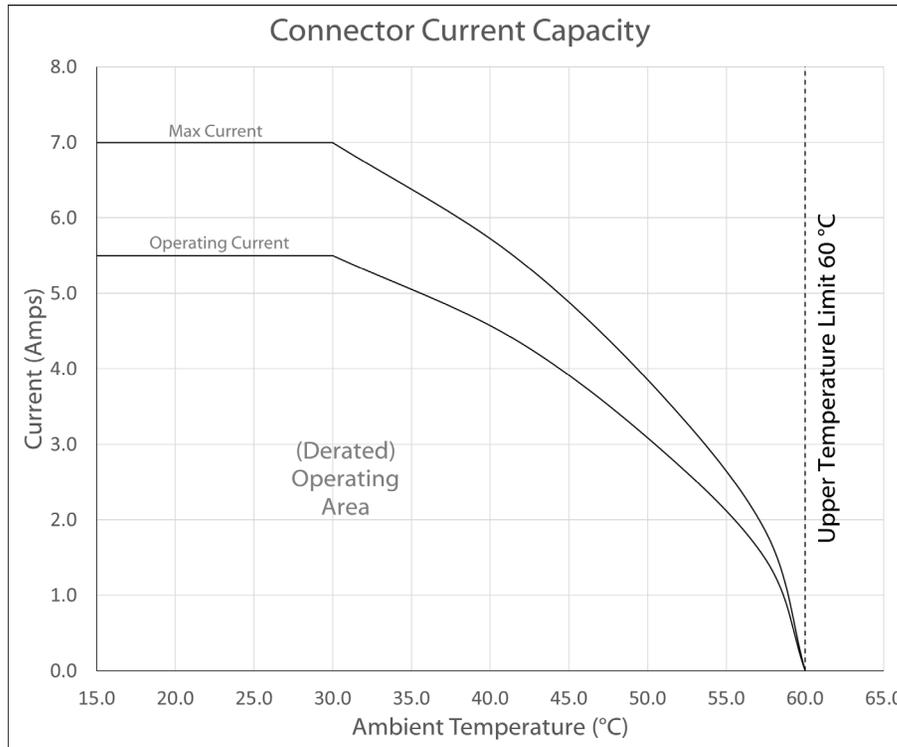

Testing based on IEC 60512-5-2. Max current curve generated with isolated test article under controlled environmental conditions, and does not take into account external factors such as housings, mating cables, or other circuitry. Operating current curve (derated by 20% of maximum values) accounts for external factors, and manufacturing variation.

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	8/04/2016	Initial release	Verified:	RoHS compliant	
A1	1/03/2017	Updated materials list	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
A2	8/25/2017	Updated notes		Description: Connector, dc jack, 3.5x1.1xL24.2 mm, panel mount, threaded, nut and washer, brass, nickel	Size: A Part number: 54-00060
					Scale: 2:1 Sheet 2 of 2