
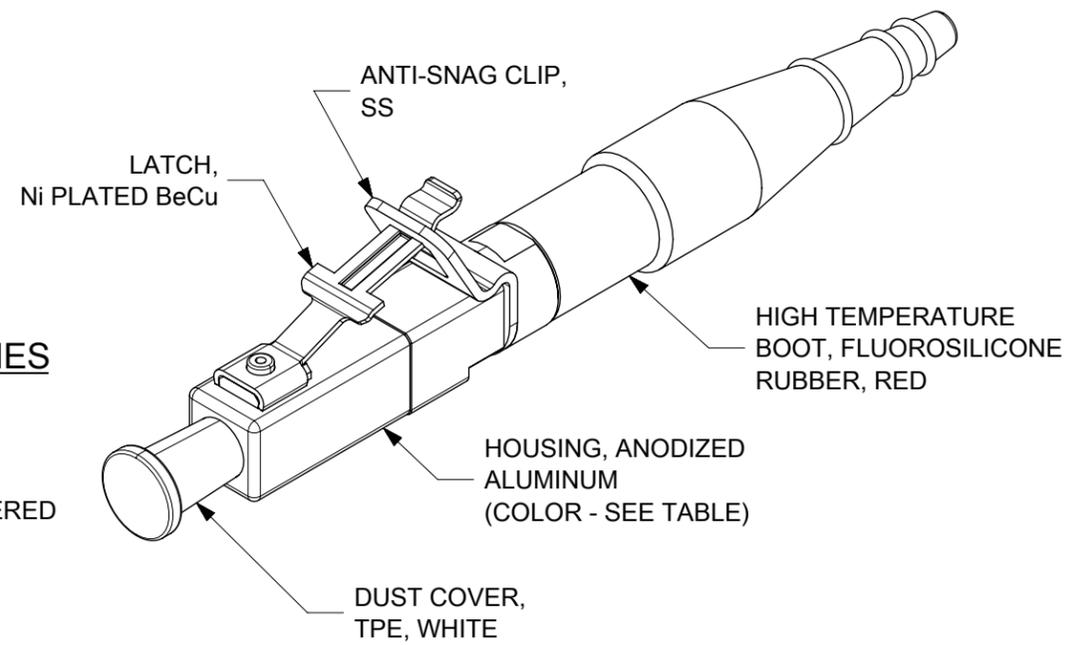
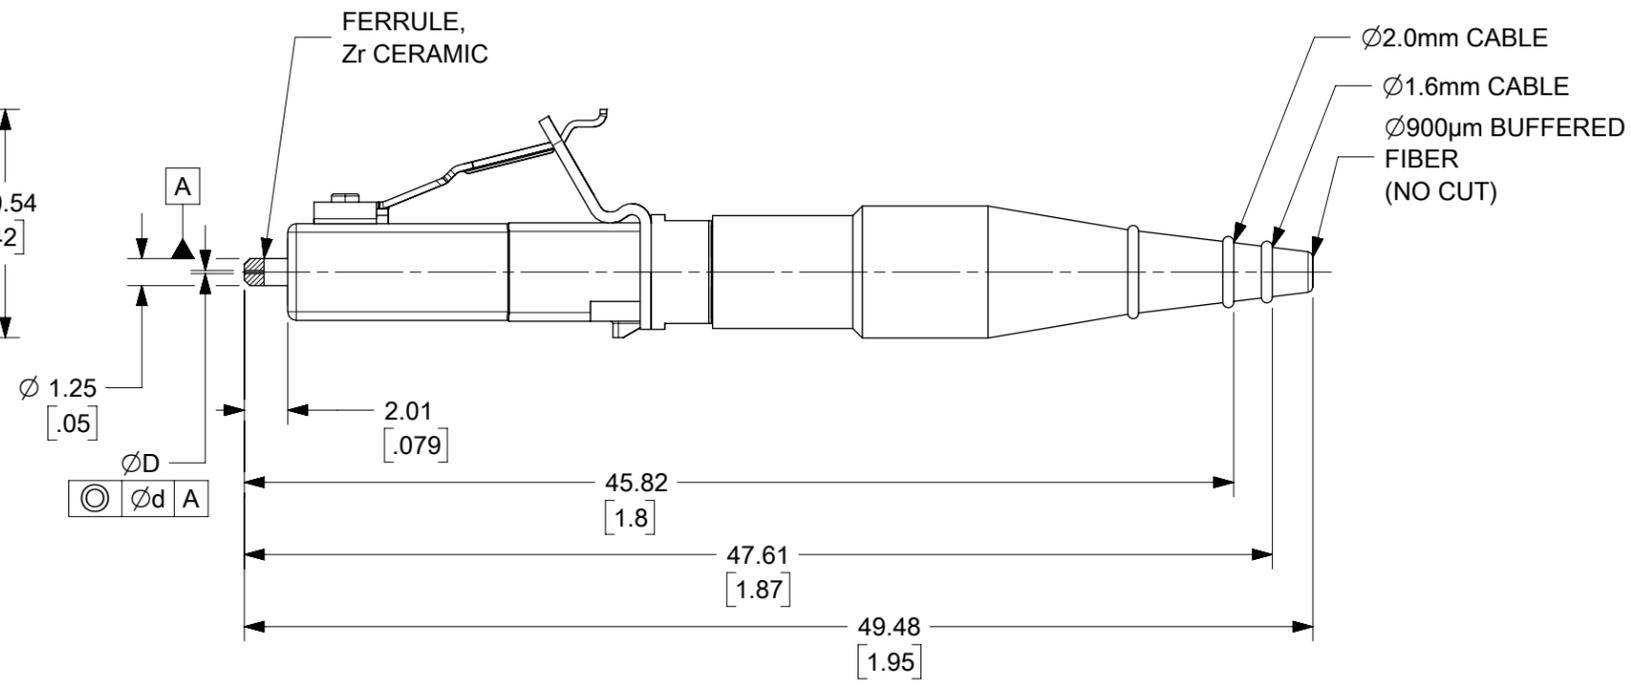


CONNECTOR P/N	CONNECTOR TYPE	HOUSING COLOR	ØD (µm)	Ød (µm)
1063975300	Single Mode	Blue	125.5 +0.5/-0	0.5
1063975301			126.0 +1.0/-0	1.0
1063975500	Multimode	Gold	127.0 +3.0/-0	3.0

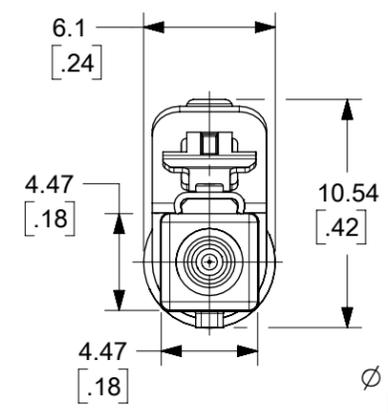

- NOTES:
1. INTERFACE DIMENSIONS COMPLY TO IEC 61754-20 TYPE LC CONNECTOR FAMILY.
  2. BOOT TO BE CUT AT LINES AS SHOWN DEPENDING ON THE CABLE SIZE.
  3. FOR TERMINATION PROCEDURE USE STANDARD LC TERMINATION PROCEDURE. (RECOMMENDED CRIMP TOOL P/N 867445000)
  4. CONNECTOR TESTED TO PASS FOLLOWING STANDARDS:
    - TELCORDIA GR-326-CORE. THERMAL CYCLE CONDITIONS MODIFIED TO BE -60°C TO +150°C (REFER TO TEST REPORT TR8797)
    - EIA-364 (REFER TO TEST REPORT TR8797)
- CONNECTOR IS SOLD AS A KIT. CUSTOMER IS RESPONSIBLE TO PERFORM THEIR OWN TEST TO VERIFY THEIR TERMINATION PROCESS AS A FINISHED PRODUCT.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<b>molex</b>			
	DIMENSION UNITS	SCALE	EC NO: 655686					
	MM/INCH	3:1	DRWN: IGUMIN 2021/02/15					
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: GGENCHANOK 2021/02/18					
DIVISIONAL SYMBOLS	ANGULAR TOL ± 1.0°		APPR: GGENCHANOK 2021/02/18		PRODUCT CUSTOMER DRAWING			
	4 PLACES ±	INITIAL REVISION:						
	3 PLACES ±	DRWN: EEFUNG 2010/06/03		DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION	
	2 PLACES ±	APPR: WCHEN 2010/06/10		SD-106397-5300	PSD	001	B1	
1 PLACE ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
0 PLACES ±				B-SIZE	106397	SEE TABLE		1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2021/02/18	16:18:17
-----------------	----	--------------	------------	----------