
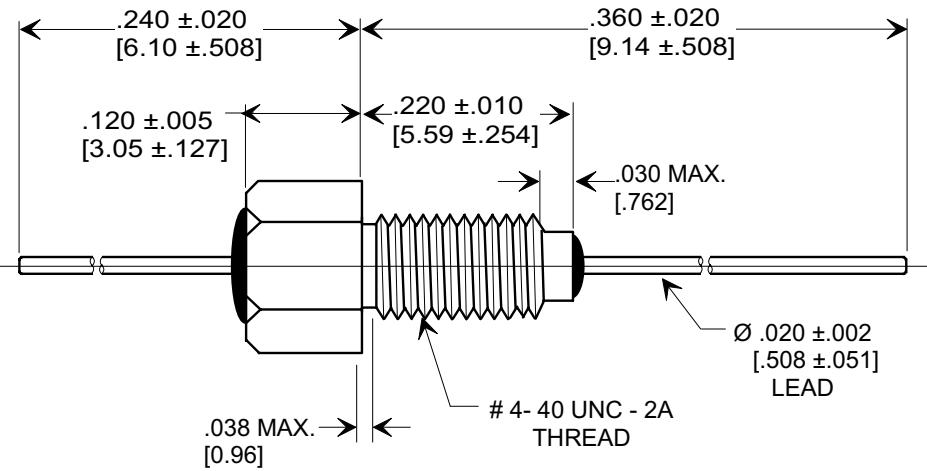
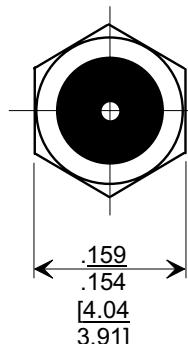




This drawing is the property of  
Tusonix, Inc., and may not be  
used, reproduced, published or  
disclosed to others without ex-  
pressed authorization by Tusonix Inc.

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

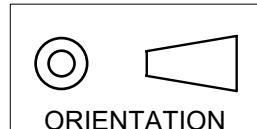

MOUNTING HARDWARE

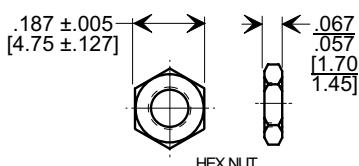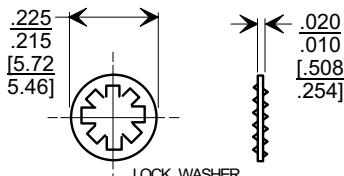

NOTES:

1. TUSONIX STANDARD PART NUMBER: 4400-060.  
TUSONIX RoHS COMPLIANT PART NUMBER: 4400-060 LF.  
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. MATERIALS: SILVER PLATED BUSHING, LEAD, AND MOUNTING HARDWARE.
3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS.  
STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
4. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
5. MAXIMUM RECOMMENDED SOLDERING TEMPERATURE: 260°C.
6. SUPPLIED WITH HEX NUT AND INTERNAL TOOTH LOCK WASHER.
7. MAXIMUM RECOMMENDED MOUNTING TORQUE, 2.0 lb-in [.226 Nm].

CAP.(pf)	TOLERANCE	WORKING VOLTAGE DC		PEAK CURRENT (AMPS)	I.R. MIN. @ 100 (VDC)	DWV (VDC)	MIN. NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220				
		85°C	125°C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
27,000	GMV	70	50	10	10 G Ω	150	10	28	45	65	70

REVISION RECORD	Original Release C.O. <b>20000614-2-01</b> 0		-TOLERANCES-- Unless Otherwise Specified	Title <b>BUSHING STYLE EMI FILTER</b>				
	DM. .038 WAS .030. S.M. 11-08-01	<b>2001102-1-07</b> 1						
	ADDED AND REVISED NOTES. ADDED IR & DWV S.M. 01-24-06	<b>20060109-3-07</b> 2		DECIMAL ± NOTED			Drawn S.M. 06-14-00	Scale 5 X
			ANGLES ± //				Approved T.C. 06-14-00	
				<b>TUSONIX</b> TUCSON, ARIZONA			A	<b>4400-060</b>