




2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. TO BE USED WITH PANDUIT POLYESTER COATED METAL BANDING MBCH-QR316
2. APPLICATION TOOL: GS4MT, ST2MT, PPTMT, ST3MT, OR HTMT
3. TOOL TENSION SETTING: 4 TO 8 (GS4MT AND PPTMT ONLY)
4. DIMENSIONS IN [] ARE MILLIMETERS
5. MINIMUM LOOP TENSILE STRENGTH: 250 LBS (1112 N)
6. TOLERANCES:
 - .X = ±.030 [.762]
 - .XX = ±.020 [.508]
 - .XXX = ±.010 [.254]
 - ANGLES = ±2°

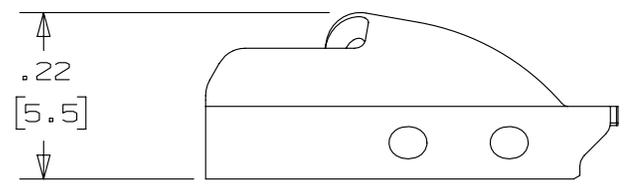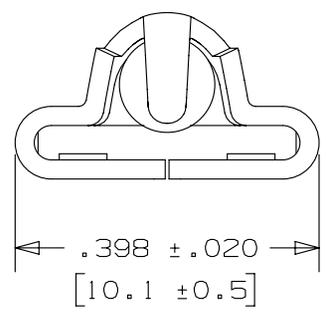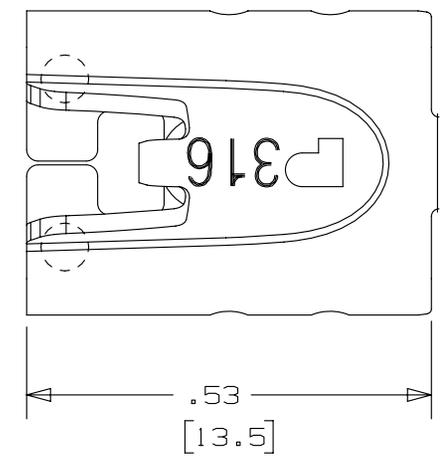

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|------|------|-----|------|--------------------------------------------------------------------|------------|
| 01A | 4/13 | JAMB | MIM | RGRO | UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO | SSECN01049 |
| 00A | 5/05 | JAMB | EJD | SKB | DRAWING RELEASED | 12675 |

| | | | | | | | | |
|-------------------------------------------------------------------|--|------|--|-----|--|------------------------------------------|--|------|
| TITLE | | | | | | METAL TIE HEAD HEAVY PART NO. MTHCH-C316 | | |
| ITEM REVISION NAME | | | | | | CUSTOMER DRAWING | | |
| DATASET FILE NAME | | | | | | N41212BS_01 | | |
| DATASET FILE NAME | | | | | | N41212BS_DC/01A | | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] | | | | | | | | |
| .x ± .1 [2.54] .xxx ± .005 [.127] | | | | | | | | |
| .xx ± .01 [.25] ANGLES ± 5 ° | | | | | | MATERIAL: | | |
| | | | | | | 316 STAINLESS STEEL | | |
| | | | | | | DRAWING NUMBER: | | |
| | | | | | | N41212BS_DC | | |
| DRAWN BY | | DATE | | CHK | | SCALE | | SIZE |
| JAMB | | 5/05 | | EJD | | 4:1 | | A |
| THIRD ANGLE PROJECTION | | | | | | SHT 1 OF 1 | | |

2

1