Pro/ENGINEER DRAWING

3. PATENTED. A NUTS ARE PACKAGED SEPERATELY IN A BAG.

2.	COMPLIES	$W \mid T \mid H$	DIRECTIVE	2002/95/EC	(ROHS)


—#8-32 PAN HEAD SCREW


16.0


24.5

1954381-2 & -3

- MATERIALS AND FINISH:
 SLIDER: PBT, UV FI RATING, BLACK, 94V5
 BASE: PHOSPHOR BRONZE; FINISH: Sn OVER NI
 MOUNTING HARDWARE: STAINLESS STEEL EXCEPT #8-32 HEX NUT WHICH IS CARBON STEEL

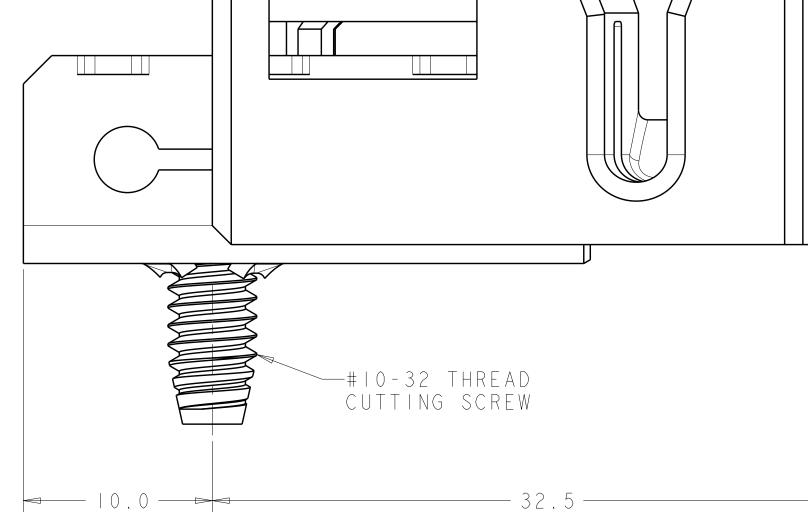

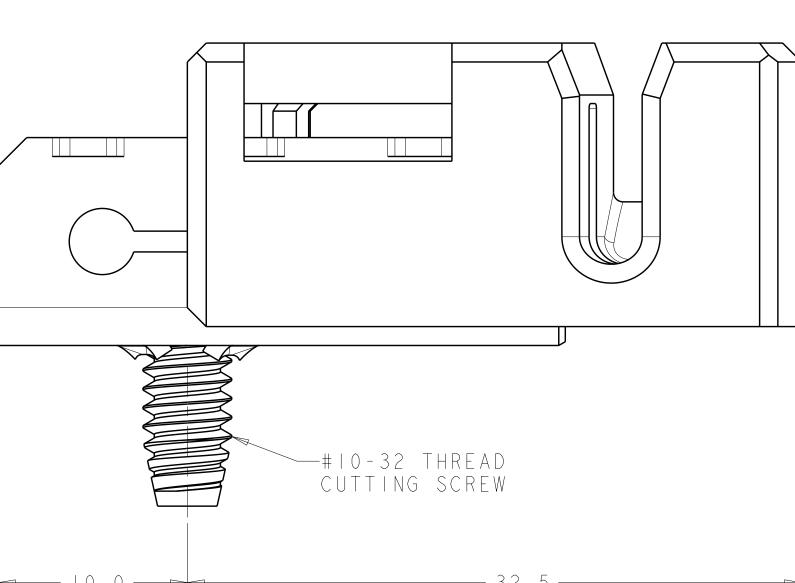

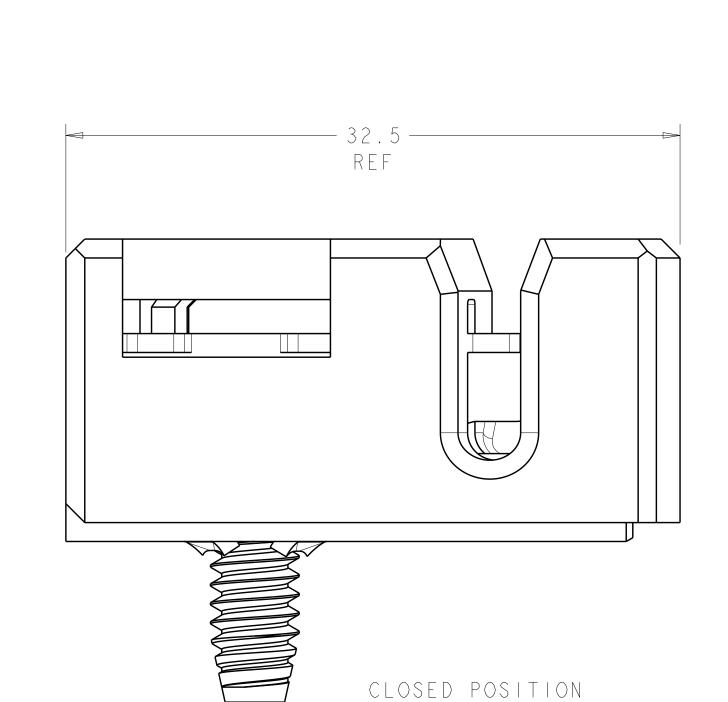

NONE

#10-32 THREAD CUTTING .375LG

#10-32 PAN HEAD .625LG

#8 PAN HEAD .500LG

#8-32 PAN HEAD .500LG


#10-32 THREAD CUTTING .375LG

SCREW

APPLICATION SPEC

CUSTOMER DRAWING

THIS DRAWING IS A CONTROLLED DOCUMENT.

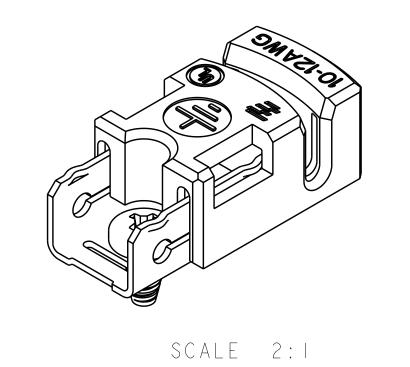

12AWG

NONE

NONE


NUT WITH LOCKWASHER

HEX NUT

NONE

NUT

1 NUT WITH LOCKWASHER

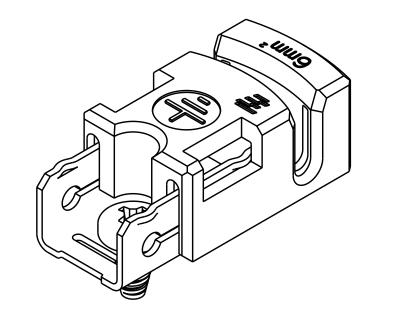

SCALE 2:1 1954381-5 ONLY

6mm² AND 4mm²

6mm² AND 4mm²

10-12 AWG, 4mm²

10-12 AWG, 4mm²

10-12 AWG, 4mm²

10-12 AWG, 4mm²

WIRE SIZE

IZE CAGE CODE DRAWING NO

(100779 C-1954381

1954381-6

1954381-5

1954381-4

1954381-3

1954381-2

1954381-1

PART

TE Connectivity

SCALE 5: | SHEET | OF | REV D 5

GROUNDING CLIP ASSEMBLY SOLID WIRE

NUMBER

- uno

2			
IST			
0	Р	LTR	

REVISIONS D5 EDITED NOTES PER ECO-II-013836 15JUL2011 DW JE

DESCRIPTION