




PAGE 1/2	ISSUE 11-01-19A	SERIES SHV	PART NUMBER R317720000
----------	-----------------	------------	------------------------

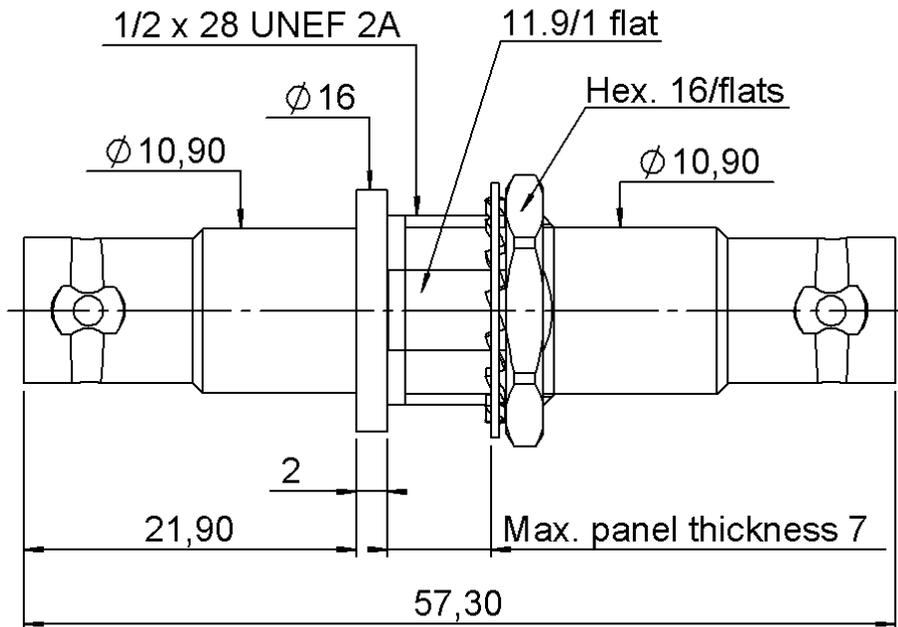


**PANEL CUT OUT**



mm		
	Maxi	mini
<b>A</b>	12.8	12.7
<b>B</b>	12.1	12

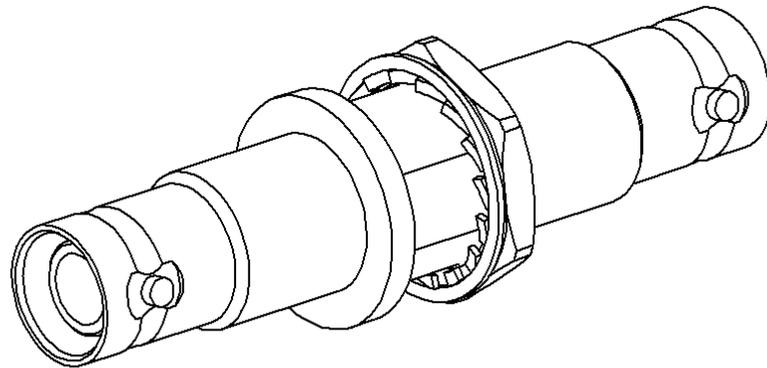

All dimensions are in mm. Tolerances according ISO 2768 m-H



COMPONENTS	MATERIALS	PLATING ( $\mu\text{m}$ )
Body	<b>BRASS</b>	<b>NICKEL</b>
Center contact	<b>BRASS</b>	<b>GOLD OVER NICKEL</b>
Outer contact	-	-
Insulator	<b>PTFE</b>	
Gasket	-	
Others parts	<b>BRASS</b>	<b>NICKEL</b>
-	-	-
-	-	-

PAGE 2/2	ISSUE 11-01-19A	SERIES SHV	PART NUMBER R317720000
----------	-----------------	------------	------------------------

**PACKAGING**

Standard	Unit	Other
1	Contact us	Contact us

**ELECTRICAL CHARACTERISTICS**

Impedance		<b>50</b>	Ω
Frequency		<b>0-2</b>	GHz
VSWR	<b>1.2</b> +	<b>0,3000</b>	x F(GHz) Maxi
Insertion loss		<b>NA</b>	√F(GHz) dB Maxi
RF leakage	- (	<b>NA</b>	- F(GHz) dB Maxi
Voltage rating		<b>**</b>	Veff Maxi
Dielectric withstanding voltage		<b>10000*</b>	Veff mini
Insulation resistance		<b>5000</b>	MΩ mini

**MECHANICAL CHARACTERISTICS**

Center contact retention			
Axial force – Mating End		<b>27</b>	N mini
Axial force – Opposite end		<b>27</b>	N mini
Torque		<b>NA</b>	N.cm mini

Recommended torque			
Mating		<b>NA</b>	N.cm
Panel nut		<b>370</b>	N.cm

Mating life		<b>500</b>	Cycles mini
Nominal Weight (Add +15% for max weight)		<b>0,0000</b>	g

**ENVIRONMENTAL**

Operating temperature	<b>-65/+165</b>	°C
Hermetic seal	<b>NA</b>	Atm.cm3/s
Panel leakage	<b>NA</b>	

**SPECIFICATION**

**OTHER CHARACTERISTICS**

Assembly instruction:

Others:  
**\*\*6000Veff (DC)**  
**\*\*3500Vrms (AC)**  
**\*12000V Coupled Connector**