



6 5 4 3 2 1

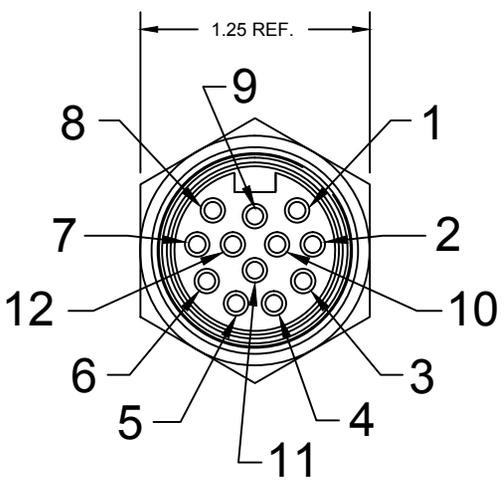

FACE VIEW - FEMALE

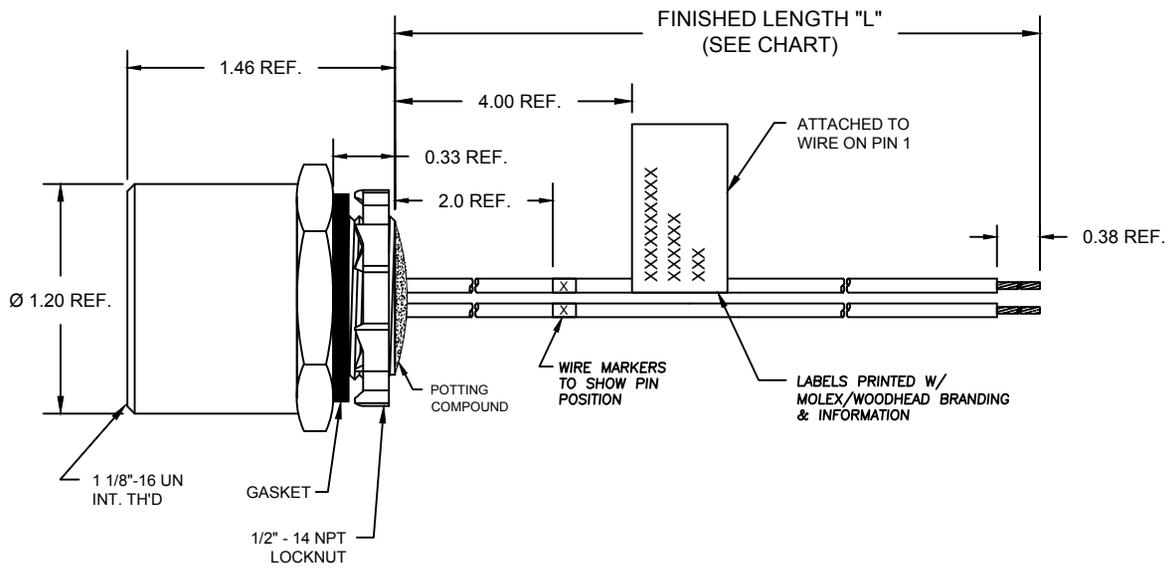

1	BLUE
2	BLUE
3	BLUE
4	BLUE
5	BLUE
6	BLUE
7	BLUE
8	BLUE
9	GREEN
10	BLUE
11	BLUE/WHITE
12	BLUE

(B)
3R2000AA9M010D
 LENGTH
 M010 - 1 METER
 M100 - 10 METER

SPECIFICATIONS:

SHELL MATERIAL: ANODIZED ALUMINUM
 CONTACT MATERIAL: GOLD/NICKEL OVER COPPER ALLOY
 INSERT MATERIAL: YELLOW TPE
 LOCKNUT: ZINC-PLATED STEEL
 GASKET: BLACK NEOPRENE
 WIRES: #16-1, PVC LEADS
 ASSEMBLY RATING: 600V, 8A
 ENVIRONMENTAL: -20°C TO 105°C
 IP67 WHEN MATED
 AGENCY APPROVALS: UL LISTED

ADD PIN MATRIX EC NO: IPC2016-1745 DRWN: MZIELINS 2016/06/23 CHKD: RSTONE 2016/06/29 APPR: BWOODMAN 2013/04/05	QUALITY SYMBOLS ▽=0 ▽/C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY VOU	DATE 2011/01/28	TITLE MINI-CHANGE RECEPTACLE 12P F/FR 1/2 NPT MOUNT #16-1 PVC WIRES			
		4 PLACES 3 PLACES 2 PLACES 1 PLACE	±--- ±--- ±0.13 ±0.25	±--- ±0.05 ±0.10 ±0.20	CHECKED BY TWOLDEGE	DATE 2013/03/04				
			ANGULAR ±1/2°		APPROVED BY JFMURPHY	DATE 2013/04/05	MOLEX INCORPORATED DOCUMENT NO. SD-130015-021			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE MATRIX		SHEET NO. 1 OF 1						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

6 5 4 3 2 1

E

D

C

B

A

E

D

C

B

A