





SPECIFICATIONS

| PARAMETERS | VALUES | UNITS |
|---|------------|-------|
| RATED INPUT POWER | 1.5 | W |
| MAX INPUT POWER | 3 | W |
| IMPEDANCE | 8± 15% | OHM |
| AVG. SPL 1W/0.1M ON 4MM THICK PLA PANEL (AT 0.5, 1.0, 2.0, 5.0 kHz) | 82 | dBA |
| RESONANT FREQUENCY | 650± 20% | Hz |
| FREQUENCY RANGE | Fo~ 10,500 | Hz |
| MAGNET MATERIAL | NdFeB | - |
| OPERATING TEMPERATURE | -20~ +60 | °C |
| WEIGHT | 10 | grams |

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

REVISION HISTORY

| LTR | DESCRIPTION | DATE | APPROVED |
|-----|-----------------------------------|---------|----------|
| - | RELEASED FROM ENGINEERING | 5/18/16 | |
| A | ADDED NOTE 4 | 6/27/16 | B.R. |
| B | UPDATED MAGNET DIAMETER TOLERANCE | 7/21/17 | M.V. |

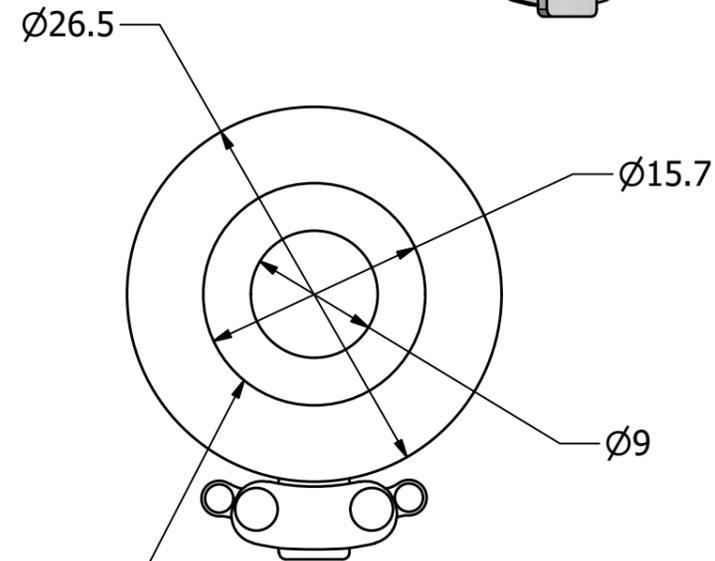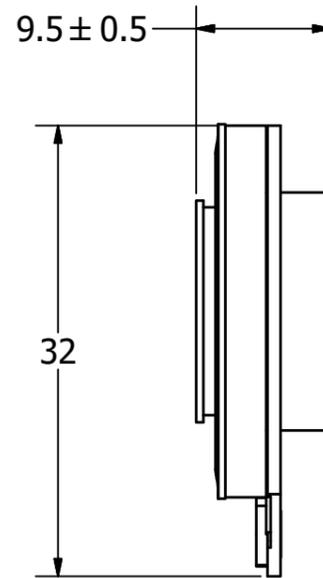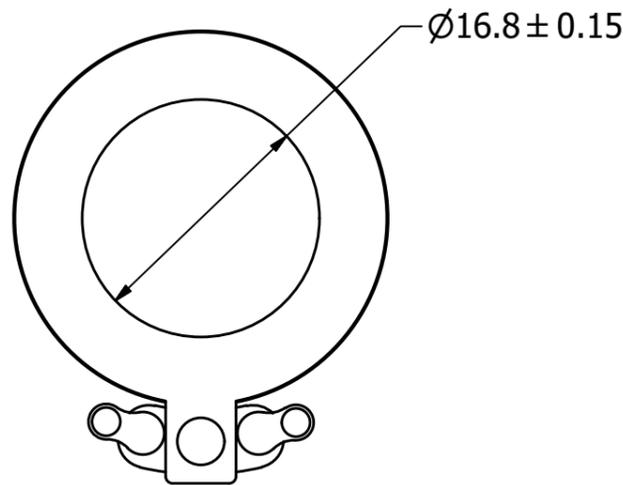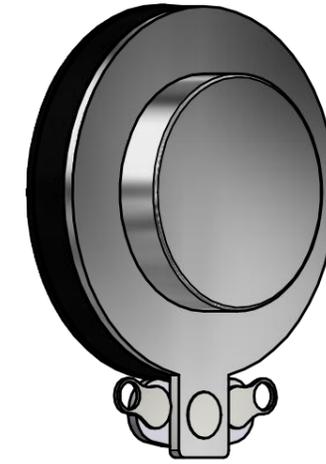

MOUNTING RING
3M™ VHB™ DOUBLE-SIDED TAPE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2011/65/EU COMPLIANT.
4. FOR APPLICATIONS THAT ARE TO BE SUBJECTED TO EXTERNAL FORCE, SHOCK, OR VIBRATION, PUI AUDIO RECOMMENDS SOLID MECHANICAL REINFORCEMENT TO ENSURE RIGID COUPLING BEYOND THAT PROVIDED BY THE 3M™ VHB™ F-9473PC DOUBLE-SIDED TAPE.

| | | | | | | | | | |
|--|-------------------|---|-----------|-------------------|-----------|-------------|-----------|------------|--|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°. | SIZE A3 | Designed by | Date | Checked by | Date | Approved by | Date | Drawn Date | |
| | | M.V. | 5/18/2016 | M.V. | 5/18/2016 | B.R. | 5/18/2016 | 5/18/2016 | |
| ASX02608-R.idw | |  | | ASX02608-R | | | | | |
| | | | | Exciter | | | Edition | Sheet | |
| | | | | | | | - | 1 / 1 | |