

## MM74HC594

# 8-Bit Shift Register with Output Registers

### General Description

This high speed shift register utilizes advanced silicon-gate CMOS technology. This device possesses the high noise immunity and low power consumption of standard CMOS integrated circuits, as well as the ability to drive 15 LS-TTL loads.

This device contains an 8-bit serial-in, parallel-out shift register that feeds an 8-bit D-type storage register. Separate clocks and direct overriding clears are provided for both the shift register and the storage register. The shift register has a direct-overriding clear, serial input, and serial output (standard) pins for cascading. Both the shift register and storage register use positive-edge triggered clocks. If both clocks are connected together, the shift register state will always be one clock pulse ahead of the storage register.

The 74HC logic family is speed, function, and pin-out compatible with the standard 74LS logic family. All inputs are protected from damage due to static discharge by internal diode clamps to  $V_{CC}$  and ground.

### Features


- Low quiescent current: 80  $\mu$ A maximum
- Low input current: 1  $\mu$ A maximum
- 8-bit serial-in, parallel-out shift register with storage
- Wide operating voltage range: 2V to 6V
- Cascadable
- Shift register has direct clear
- Guaranteed shift frequency: DC to 30 MHz

### Ordering Code:

Order Number	Package Number	Package Description
MM74HC594M	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow
MM74HC594N	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.


### Connection Diagram

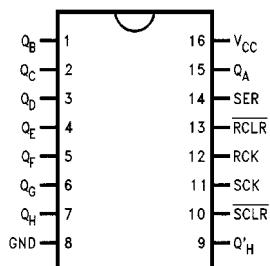

### Truth Table

RCK	SCK	SCLR	RCLR	Function
X	X	X	L	Storage Register cleared
X	X	L	X	Shift Register cleared $Q'_H = 0$
X	↑	H	H	Shift Register clocked $Q_N = Q_{n-1}, Q_0 = SER$
↑	X	H	H	Contents of Shift Register transferred to output latches

## Logic Diagram

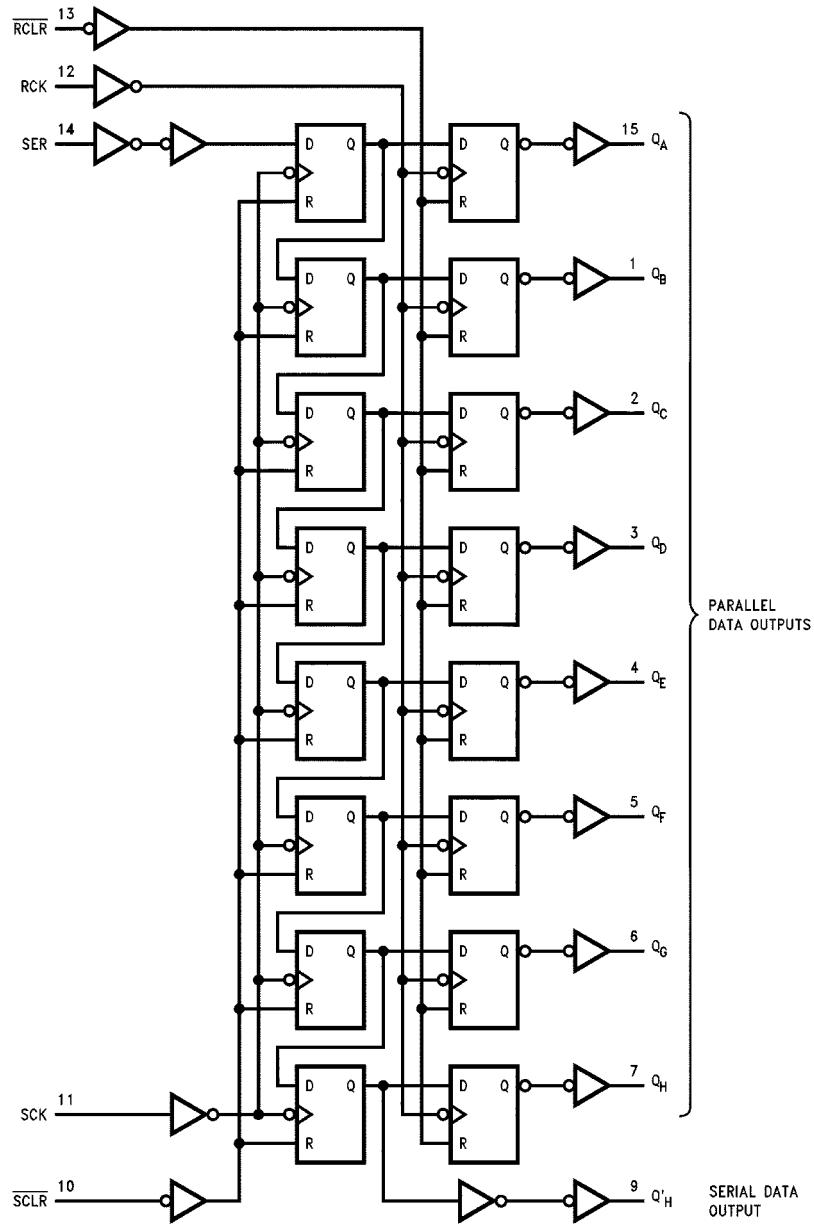

**Absolute Maximum Ratings**(Note 1)

(Note 2)

Supply Voltage ( $V_{CC}$ )	-0.5 to +7.0V
DC Input Voltage ( $V_{IN}$ )	-1.5 to $V_{CC}$ +1.5V
DC Output Voltage ( $V_{OUT}$ )	-0.5 to $V_{CC}$ +0.5V
Clamp Diode Current ( $I_{IK}, I_{OK}$ )	±20 mA
DC Output Current, per pin ( $I_{OUT}$ )	±35 mA
DC $V_{CC}$ or GND Current, per pin ( $I_{CC}$ )	±70 mA
Storage Temperature Range ( $T_{STG}$ )	-65°C to +150°C
Power Dissipation ( $P_D$ ) (Note 3)	600 mW 500 mW
S.O. Package only	260°C
Lead Temperature ( $T_L$ ) (Soldering 10 seconds)	

**Recommended Operation Conditions**

		Min	Max	Units
Supply Voltage ( $V_{CC}$ )	2	6	V	
DC Input or Output Voltage ( $V_{IN}, V_{OUT}$ )	0	$V_{CC}$	V	
Operating Temperature Range ( $T_A$ )	-40	+85	°C	
Input Rise or Fall Times ( $t_r, t_f$ )				
	$V_{CC} = 2.0V$	1000	ns	
	$V_{CC} = 4.5V$	500	ns	
	$V_{CC} = 6.0V$	400	ns	

**Note 1:** Absolute Maximum Ratings are those values beyond which damage to the device may occur.

**Note 2:** Unless otherwise specified all voltages are referenced to ground.

**Note 3:** Power Dissipation temperature derating—plastic "N" package: -12 mW/°C from 65°C to 85°C.

**DC Electrical Characteristics** (Note 4)

Symbol	Parameter	Conditions	$V_{CC}$	$T_A = 25^\circ C$		Guaranteed Limits	Units
				Typ			
$V_{IH}$	Minimum HIGH Level Input Voltage		2.0V	1.5	1.5		V
			4.5V	3.15	3.15		
			6.0V	4.2	4.2		
$V_{IL}$	Maximum LOW Level Input Voltage		2.0V	0.5	0.5		V
			4.5V	1.35	1.35		
			6.0V	1.8	1.8		
$V_{OH}$	Minimum HIGH Level Output Voltage	$V_{IN} = V_{IH}$ or $V_{IL}$ $ I_{OUT}  \leq 20 \mu A$	2.0V	2.0	1.9	1.9	V
			4.5V	4.5	4.4	4.4	
			6.0V	6.0	5.9	5.9	
	$Q'_H$	$V_{IN} = V_{IH}$ or $V_{IL}$ $ I_{OUT}  \leq 4.0 \text{ mA}$ $ I_{OUT}  \leq 5.2 \text{ mA}$	4.5V	4.7	3.98	3.84	V
			6.0V	5.2	5.48	5.34	
	$Q_A$ thru $Q_H$	$V_{IN} = V_{IH}$ or $V_{IL}$ $ I_{OUT}  \leq 6.0 \text{ mA}$ $ I_{OUT}  \leq 7.8 \text{ mA}$	4.5V	4.2	3.98	3.84	V
			6.0V	5.7	5.48	5.34	
$V_{OL}$	Maximum LOW Level Output Voltage	$V_{IN} = V_{IH}$ or $V_{IL}$ $ I_{OUT}  \leq 20 \mu A$	2.0V	0	0.1	0.1	V
			4.5V	0	0.1	0.1	
			6.0V	0	0.1	0.1	
	$Q'_H$	$V_{IN} = V_{IH}$ or $V_{IL}$ $ I_{OUT}  \leq 4.0 \text{ mA}$ $ I_{OUT}  \leq 5.2 \text{ mA}$	4.5V	0.2	0.26	0.33	V
			6.0V	0.2	0.26	0.33	
	$Q_A$ thru $Q_H$	$V_{IN} = V_{IH}$ or $V_{IL}$ $ I_{OUT}  \leq 6.0 \text{ mA}$ $ I_{OUT}  \leq 7.8 \text{ mA}$	4.5V	0.2	0.26	0.33	V
			6.0V	0.2	0.26	0.33	
$I_{IN}$	Maximum Input Current	$V_{IN} = V_{CC}$ or GND	6.0V		±0.1	±1.0	µA
$I_{CC}$	Maximum Quiescent Supply Current	$V_{IN} = V_{CC}$ or GND $I_{OUT} = 0 \mu A$	6.0V		8.0	80	µA

**Note 4:** For a power supply of 5V ±10% the worst case output voltages ( $V_{OH}$ , and  $V_{OL}$ ) occur for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst case  $V_{IH}$  and  $V_{IL}$  occur at  $V_{CC} = 5.5V$  and 4.5V respectively. (The  $V_{IH}$  value at 5.5V is 3.85V.) The worst case leakage current ( $I_{IN}$ ,  $I_{CC}$ , and  $I_{OZ}$ ) occur for CMOS at the higher voltage and so the 6.0V values should be used.

## AC Electrical Characteristics


$V_{CC} = 2.0V$  to  $6.0V$ ,  $C_L = 50$  pF,  $t_r = t_f = 6$  ns (unless otherwise specified)

Symbol	Parameter	Conditions	$V_{CC}$	$T_A = 25^\circ C$		Units	
				Typ	Guaranteed Limits		
$f_{MAX}$	Maximum Operating Frequency	$C_L = 50$ pF	2.0V 4.5V 6.0V		6 30 35	4.8 24 28	MHz
$t_{PHL}, t_{PLH}$	Maximum Propagation Delay from SCK to $Q'_H$	$C_L = 50$ pF	2.0V 4.5V 6.0V		150 30 25	185 37 31	ns
$t_{PHL}, t_{PLH}$	Maximum Propagation Delay from RCK to $Q_A$ thru $Q_H$	$C_L = 50$ pF	2.0V 2.0V		150 200	185 250	ns
		$C_L = 150$ pF	4.5V 4.5V		30 40	37 50	ns
		$C_L = 50$ pF	6.0V 6.0V		25 34	31 43	ns
		$C_L = 150$ pF					
$t_{PHL}, t_{PLH}$	Maximum Propagation Delay from $\overline{SCLR}$ to $Q'_H$		2.0V 4.5V 6.0V		150 30 25	185 37 31	ns
$t_{PHL}$	Maximum Propagation Delay from $\overline{RCLR}$ to $Q_A$ thru $Q_H$	$C_L = 50$ pF	2.0V 4.5V 6.0V		125 25 21	155 31 26	ns
		$C_L = 150$ pF	2.0V 4.5V 6.0V		200 40 34	250 50 43	ns
$t_S$	SCLR LOW to RCK		2.0V 4.5V 6.0V		50 10 9	63 13 11	ns
$t_S$	RCLR HIGH to SCK		2.0V 4.5V 6.0V		5 5 5	5 5 5	ns
$t_S$	Minimum Setup Time from SER to SCK		2.0V 4.5V 6.0V		90 18 15	110 22 19	ns
$t_R$	Minimum Removal Time from $\overline{SCLR}$ to SCK		2.0V 4.5V 6.0V		20 10 10	20 10 10	ns
$t_S$	Minimum Setup Time from SCK to RCK		2.0V 4.5V 6.0V		90 18 15	110 22 19	ns
$t_H$	Minimum Hold Time SER to SCK		2.0V 4.5V 6.0V		5 5 5	5 5 5	ns
$t_W$	Minimum Pulse Width of SCK or $\overline{SCLR}$ or RCK or $\overline{RCLR}$		2.0V 4.5V 6.0V		100 20 17	125 25 21	ns
$t_r, t_f$	Maximum Input Rise and Fall Time, Clock		2.0V 4.5V 6.0V		1000 500 400	1000 500 400	ns
$t_{THL}, t_{TLH}$	Maximum Output Rise and Fall Time $Q_A - Q_H$		2.0V 4.5V 6.0V		60 12 10	75 15 13	ns
$t_{THL}, t_{TLH}$	Maximum Output Rise and Fall Time $Q'_H$		2.0V 4.5V 6.0V		75 15 13	95 19 16	ns

**AC Electrical Characteristics** (Continued)


Symbol	Parameter	Conditions	V <sub>CC</sub>	T <sub>A</sub> = 25°C		Guaranteed Limits	Units
				Typ	-40°C to +85°C		
C <sub>PD</sub>	Power Dissipation Capacitance, Outputs Enabled (Note 5)	$\overline{G} = V_{CC}$ $\overline{G} = GND$		90 150			pF
C <sub>IN</sub>	Maximum Input Capacitance			5	10	10	pF
C <sub>OUT</sub>	Maximum Output Capacitance			15	20	20	pF

**Note 5:** C<sub>PD</sub> determines the no load dynamic power consumption, and the no load dynamic current consumption.

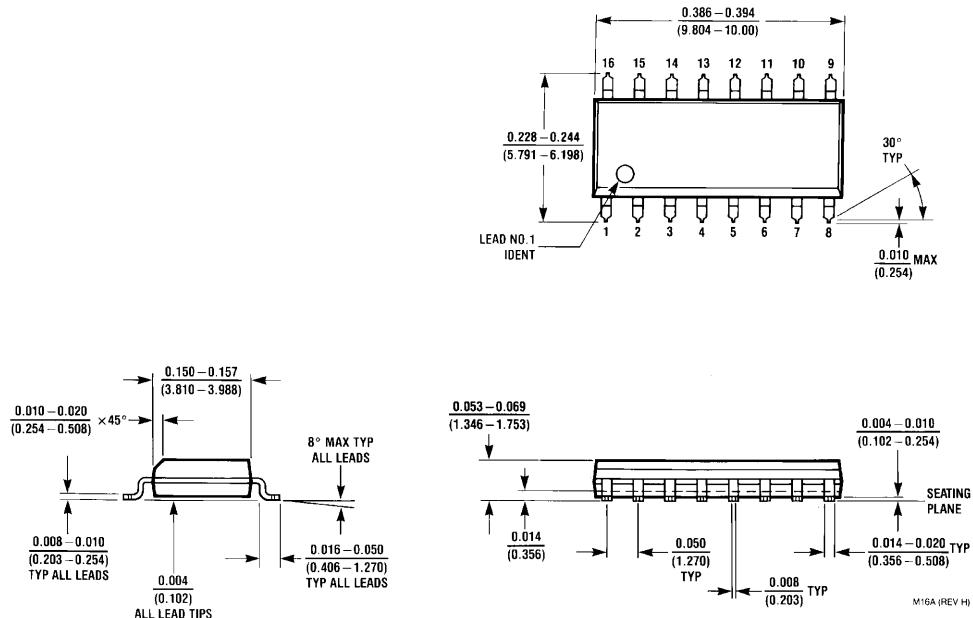**Physical Dimensions** inches (millimeters) unless otherwise noted

16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow  
Package Number M16A

## **Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

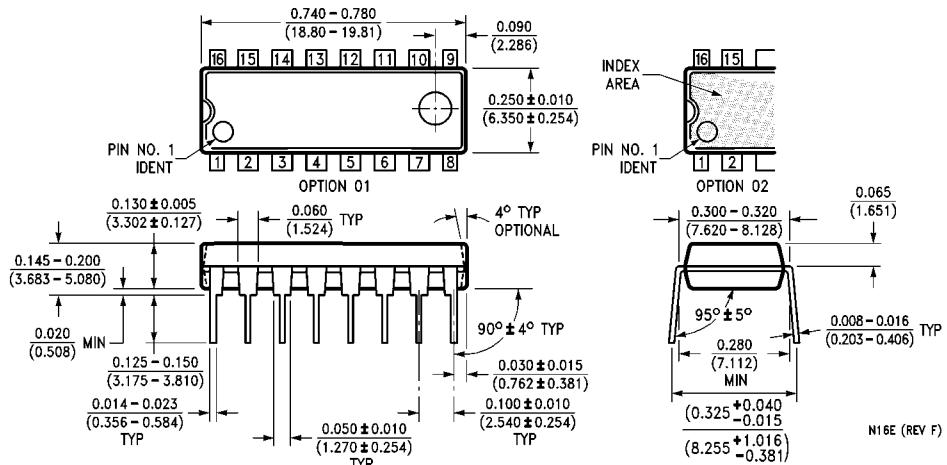

**16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide  
Package Number N16E**

---

## **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
  2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)