## EM5035 Series EuroMag Terminal Blocks

Pluggable Block, Stackable (Mates with EM5045 Series) 5.00 Centers

## **SPECIFICATIONS**

**Rating**: 10A, 300V

Center Spacing: 0.197" (5.00mm) Wire Range: #16-24 AWG

Housing Material: Black UL 94V0 Thermoplastic

Contact Material: Tin-Plated Brass

Wire Protector: Phosphor Bronze, Tin-Plated

Screw Size: M2.6 Chromatized Steel

**Operating Temperature**: 105°C (221°F) max., -40°C

(-40°F) min.

Torque Rating: 3.0 lb-in.

Construction: Modular design features dovetails for


interlocking to achieve longer lengths


Agency Information: File E62622; CE Certified

EM503503	
EM503502	

Shown with EM5045series header - order seperately

## Dimensions - mm (in)



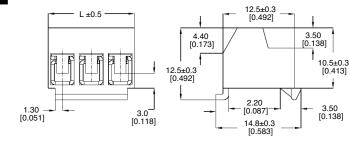

Poles	L (mm)	Poles	L (mm)
2 3 4 5 6 7 8 9 10 11 12 13	10.0 15.0 20.0 25.0 30.0 35.0 40.0 45.0 50.0 60.0 65.0	14 15 16 17 18 19 20 21 22 23 24	70.0 75.0 80.0 85.0 90.0 95.0 100.0 105.0 110.0 115.0

To convert to inches, divide by 25.4

## **Part Numbering System**

Series # of Poles Mating Header: EM5045 pg. 106

EM5035

**02** to **24**