

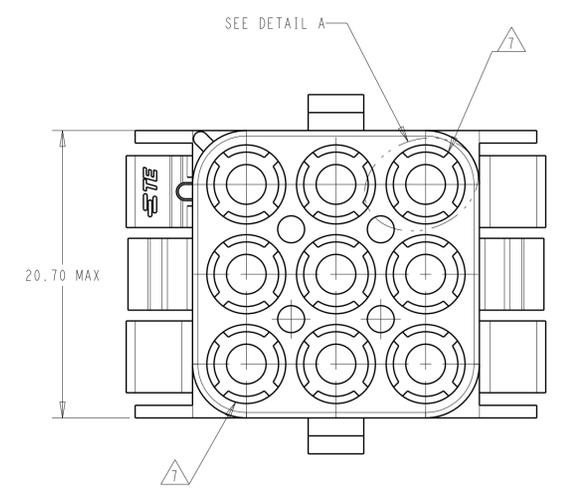
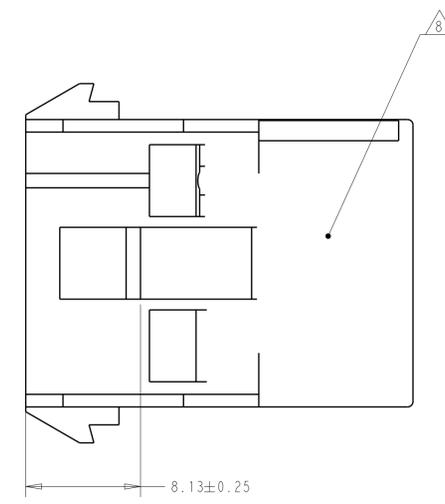





REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
W		REVISED PER ECO-20-006810	02JUN2020	BKW SF

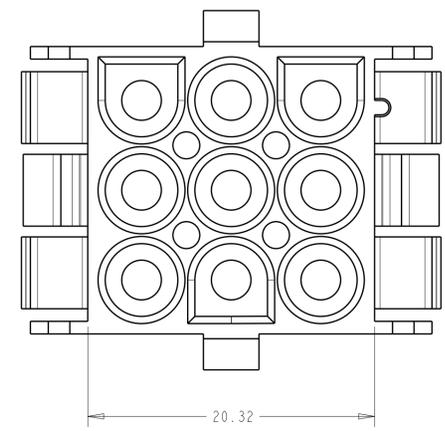

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOCK™ PLUG
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
7. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
8. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

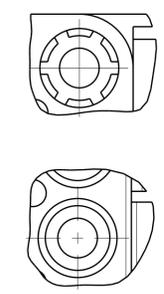

DETAIL A
OPTIONAL CONSTRUCTIONS

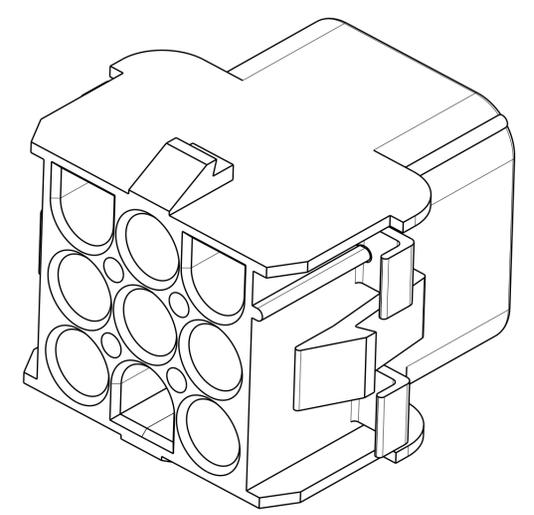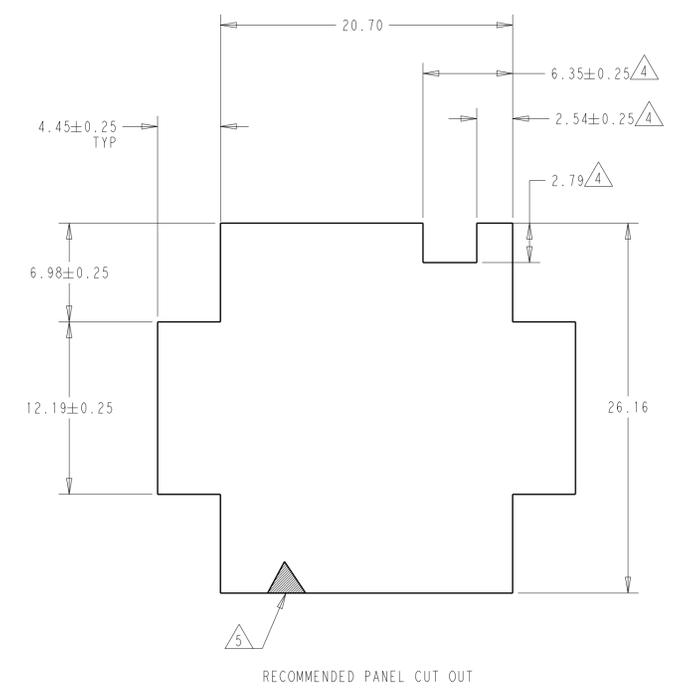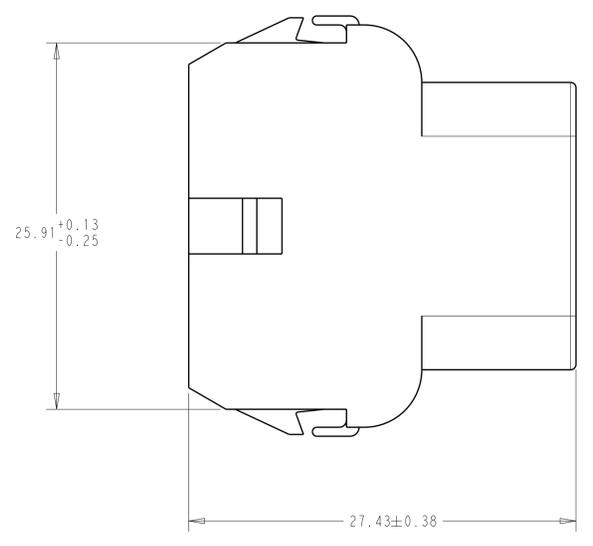

	BLACK	1-350782-9
OBSOLETE	GRAY	1-350782-8
OBSOLETE	BLUE	1-350782-6
OBSOLETE	GREEN	1-350782-5
OBSOLETE	YELLOW	1-350782-4
OBSOLETE	ORANGE	1-350782-3
OBSOLETE	RED	1-350782-2
OBSOLETE	BROWN	1-350782-1
	NATURAL	350782-1
	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	OWN: B. WEAVER 02JUN2020	CHK: S. FERNANDES 02JUN2020	APVD: V. SETTAR 02JUN2020
mm	0 PLC ±	NAME: CAP, 9 CIRCUIT, UNIVERSAL MATE-N-LOCK		
	1 PLC ±0.13	PRODUCT SPEC: -		
	3 PLC ±	APPLICATION SPEC: -		
	4 PLC ±	SIZE: 114-1010		
	ANGLES ±1°	CAGE CODE: 00779		
MATERIAL: NYLON UL 94V-0	FINISH: -	DRAWING NO: 350782		
CUSTOMER DRAWING		RESTRICTED TO: -		
		SCALE: 4:1 SHEET 1 OF 1 REV W		