NOTES:

I. MATERIALS AND FINISHES:

INNER CONDUCTOR - BERYLLIUM COPPER, SILVER PLATING OUTER CONDUCTOR - BERYLLIUM COPPER, SILVER PLATING BODY - BRASS, WHITE BRONZE PLATING NUT - BRASS, WHITE BRONZE PLATING INSULATOR - PTFE, NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

B. FREQUENCY RANGE: DC - 6 GHz

C. VSWR: ≤ 1.05 (DC-4GHz)

 \leq 1.15 (DC 4-6GHz)

D. INSERTION LOSS: $\leq 0.1 (3GHz)$

E. DWS: 2500V

F. INTERMODULATION: \leq -165 dBc (2 X 43 dBm)

3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.


B. TEMPERATURE RANGE: -40° C TO +85° C

5. PACKAGING:

A. QUANTITY: SINGLE PACK

B. MARKING: BAG TO BE MARKED

"AMPHENOL RF, AD-4310J4310J-2, AND DATE CODE"

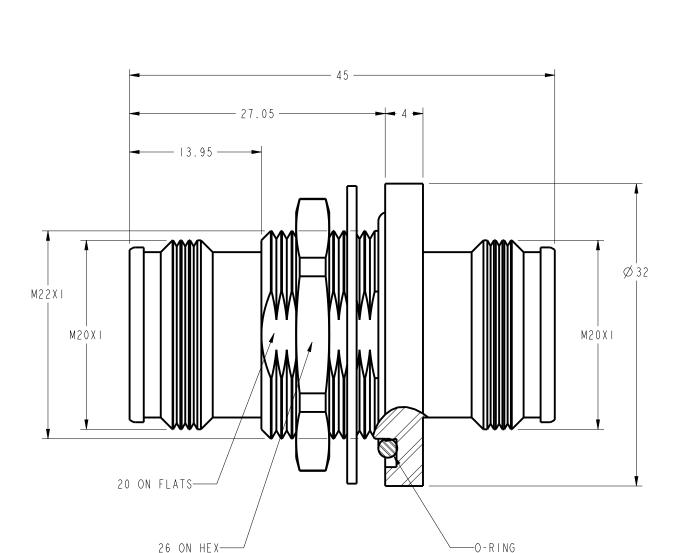

THIRD ANGLE PROJ. 🕀 🖯

REV

Α

В

CUSTOMER OUTLINE DRAWING

REVISIONS

DATE

6/15/16

10/11/16

ECO

01061

02102

APPR

KCE

KCE

DESCRIPTION

RELEASE TO MFG.

UPDATE PLATING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

 $\begin{array}{c} <0.5\,\text{mm} \\ \pm\ 0.05\,\text{mm} \\ \end{array} \begin{array}{c} 0.5\,\text{mm} \\ \pm\ 0.1\,\text{mm} \\ \end{array} \begin{array}{c} 6-30\,\text{mm} \\ \pm\ 0.2\,\text{mm} \\ \end{array} \begin{array}{c} 30-12\,\text{0mm} \\ \pm\ 0.3\,\text{mm} \\ \end{array} \begin{array}{c} \text{ANGLES} \\ \pm\ 1^{\circ} \\ \end{array} \end{array}$

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

	MATERIAL	DRAWN K. ELMES	DATE 04-May-16	T
		ENGINEER K. ELMES	DATE 04-May-16	4
	REFERENCE EAR# 7112	APPROVED K. CAPOZZI	DATE 6/15/16	SC
	CONFIGURATION LEVEL: In Work FINISH	CAD FILE		

IIILE 4.3/10 JACK TO	Amphenol RF
4.3/IO JACK BLKHD	www.amphenolrf.com
20115	DRAWING NO.AD-4310J4310J-2
SCALE: 1.0:1.0 SHEET	ITEM NO.AD-4310J4310J-2
В	PART NO.AD-4310J4310J-2