

NOTES:

TAPE AND REEL SPECIFICATIONS:


1. TAPE:


MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER ANSI/EIA-481 STANDARD


2. REEL:


13.0 [330.2] DIA. 500 PIECES OF PART NO. 1060 PER REEL.

				ECTRONICS CORP. PARK, NY 11040 • Tel (516) 328-7500
			PART NAME 2032mm SM COIN C	ELL HOLDER ON TAPE
			MATERIAL	
11.10.15	CHANGE AS PER ECN 15-133	С		NOTED
5.01.13	CHANGE AS PER ECN 13-038	В	AS NOTED	BOONE DATE 10.19.99 APP'D LN SCALE 1
6.18.07	CHANGE AS PER ECN 07-034	Α	TOLERANCES INCH [MM] COD	IX
DATE	DESCRIPTION	REV.	DECIMAL ± .015 [± 0.38] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	1060TR

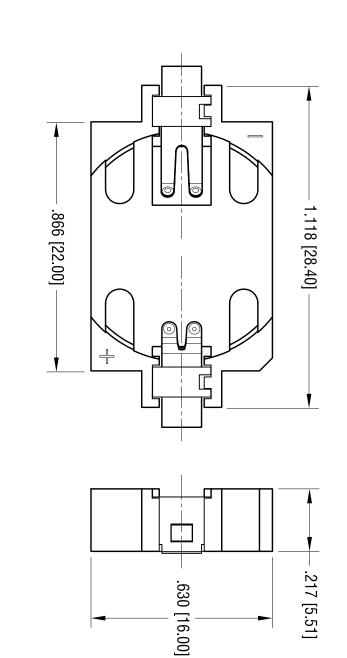

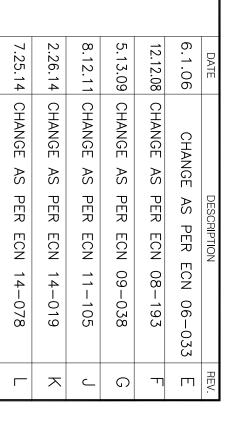

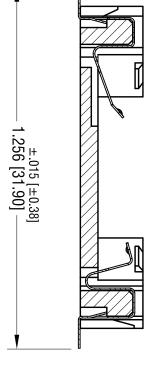



NOTES

1. BASE

MAT'L - GLASS FILLED LCP UL 94V-0

2. CONTACTS:

FINISH: GOLD FLASH PLATING

MAT'L - .006 [0.15] TH'K PHOSPHOR BRONZE

MATERIAL

ACTUAL SIZE

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE MITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.

— 102 [2 59]

ZONE FOR OPTIONAL

[3.61] MIN 142

ADHESIVE FIXATION

.276 [7.01]

MOUNTING PAD LAYOUT

.433 [11.00] 1.154 [29.31]

PART NAME www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

2032 BATTERY HOLDER, SMT

060	10	0	H		ANGULAR ± 1°
	DWG NO.	CODE	L [MM]	+ NCH	TOLERANCES
SCALE 3X	$^{ ext{APP'D}}$ $ ext{LN}$		ED	AO NOTED	,
DATE 1.19.99	DRN BY BOONE		ri J	TOIN OV	FINISH
	OTED	AS NOTED			