



TOP VIEW

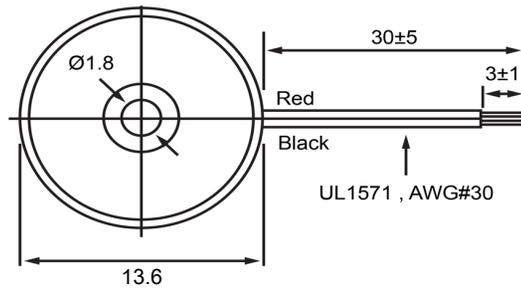

SIDE VIEW



Specifications			Notes	Revision History								
Description	Value	Unit		Version	Description		Date	Approved				
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS  DB UNLIMITED	1	Released from Engineering		10/21/2013	J.S				
Resonant Frequency	4,800	(Hz)										
Rated Voltage	5	(V)										
SPL @ 10cm	80	(dBA)										
Capacitance	12,000	(pF)										
Mount Type	Flush											
Voltage Range	1 ~ 30	(V)										
Max Rated Current	5	(mA)										
Housing Material	ABS											
Operating Temperature	-20 ~ +60	°C										
Storage Temperature	-20 ~ +60	°C										
Weight	3	(g)										
				Drawn by Date Checked by Date Approved by Date A.B. 10/21/2013 C.E. 10/21/2013 J.S 10/21/2013			Piezo Transducer			TP134805-1		

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.