


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 9643, GC	10/30/06	HM

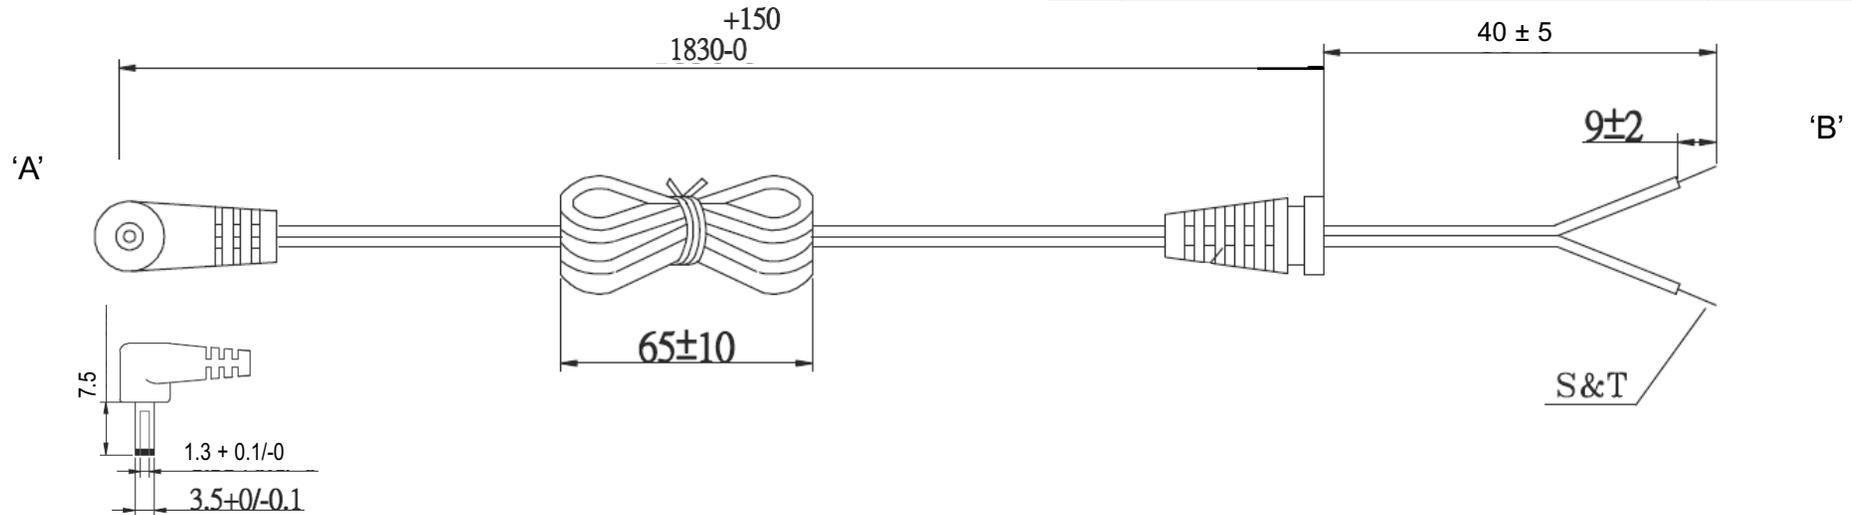

**GENERAL SPECIFICATIONS:**

VOLTAGE: 300 V  
 TEMPERATURE: 105°C  
 CABLE TYPE / SIZE: FLAT, SPT-1, 18 AWG X 2C  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 1830 ± 100 mm  
 END 'A' TERMINATION: RIGHT ANGLE FEMALE BARREL 3.5 x 1.3 x 7.5 mm  
 LOCKING NOTCH  
 END 'B' TERMINATION: STRIP & TIN  
 APPROVALS CABLE: UL, CSA or cUL  
 APPROVALS CONNECTOR: N/A

**PACKING:**

HANKED PER DRAWING.  
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

**NOTE:**

CABLE MUST BE MARKED WITH APPROVAL SYMBOLS  
 OR FILE NUMBER(S).

**RELEASED**  
 By N.Frost at 4:37 pm, Sep 13, 2018



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
			<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.01 +/- 1° .xxx +/- .005 MILLIMETERS ANGULAR .x +/- 1.0 +/- 1° .xx +/- 0.5	<b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
INIT.BY: GC	DATE: 10/30/06	DWG TITLE: OUTPUT CABLE ASSEMBLY WITH STRAIN RELIEF, RIGHT ANGLE		REV. A
DRAWN: NF	DATE: 10/30/06	FSCN No.: G, CC	SIZE: A	
APRVD: HM	DATE: 10/30/06	SCALE: NONE	PART NO: <b>KRP1806F00-SR</b>	SHEET 1/1

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice