

KSR D Series Subminiature Detect Switch for SMT



Features/Benefits

- Gold contacts
- G terminations
- Soft actuator
- RoHS compliant and compatible

Typical Applications

- Automotive
- Industrial electronics
- Medical equipment
- Detector switch applications

Specification

FUNCTION: momentary action
CONTACT ARRANGEMENT: N.O.
TERMINALS: Gullwing type for SMT

Mechanical

Type	Operating force Newtons	Operating life (operations)	Travel (mm)
KSR2D3MG LFG	1,5 ± 0,5N	100,000	0,3 ± 0,15
KSR2M3G LFG	0,8 ± 0,4N	100,000	0,19 ± 0,11

Packaging

Switches are delivered on continuous tape, in reels of 2,500 pieces.
For information on specific and custom switches, consult Customer Service Center.

Electrical

MAXIMUM POWER:	Gold
MAXIMUM VOLTAGE:	0.2 VA
MINIMUM VOLTAGE:	32 VDC
MAXIMUM CURRENT DC:	20 mV
MINIMUM CURRENT DC:	10 mA
CONTACT RESISTANCE:	1 mA
INSULATION RESISTANCE	100 mΩ
BOUNCE TIME:	(100 V): 10°Ω
	1 ms

Environmental

OPERATING TEMPERATURE:	Gold
STORAGE TEMPERATURE:	-40°C to 125°C
	-55°C to 125°C


Process

SOLDERING: Compatible with lead free reflow soldering process

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

For any part number different from those listed above, please consult your local representative.

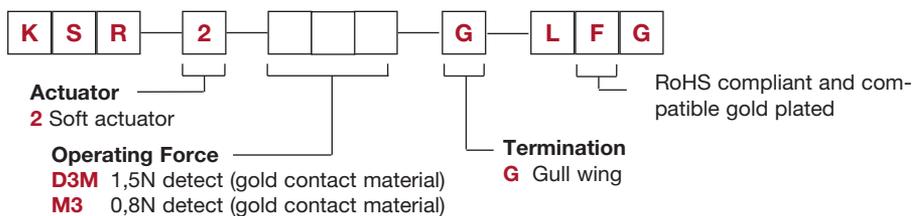

m

Detect




First Angle
Projection


Dimensions are shown: mm
Specifications and dimensions subject to change

KSR D Series Subminiature Detect Switch for SMT

KSR2D/M

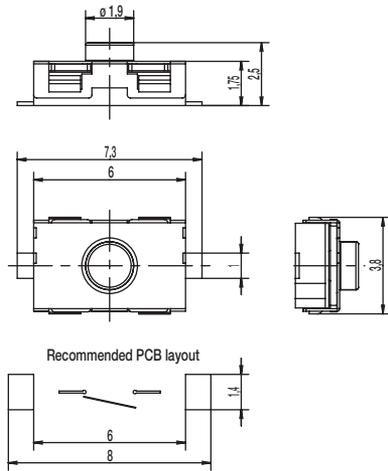

TAPE & REEL

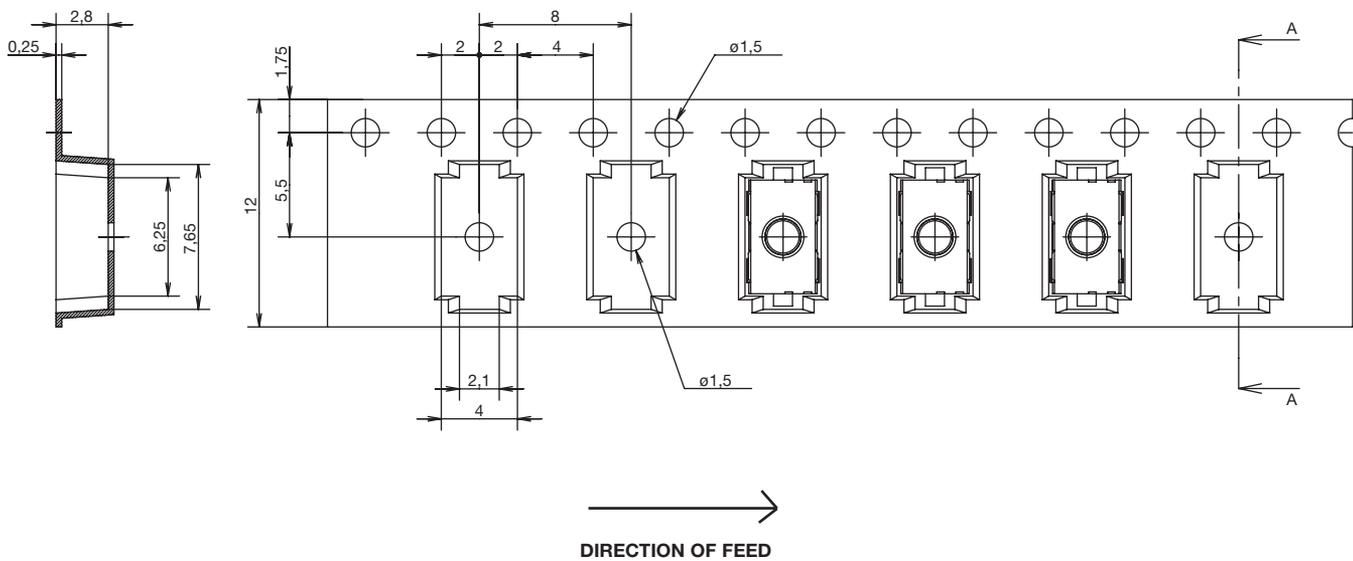

Detect