
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	220	Vac
OPERATING VOLTAGE RANGE	110 ~ 220	Vac 50/60 Hz
TONE OUTPUT	SEE 32 TONE CHART	_
RATED CURRENT	SEE 32 TONE CHART	mA
INGRESS PROTECTION	IP54 <u></u>	-
COLOR	RED	_
OPERATING TEMPERATURE	−25 ~ +70	.c
HOUSING MATERIAL	ABS	-
TERMINAL MATERIAL	SCREW	-
WEIGHT	282	grams



VOLUME CONTROL




OPTIONAL BASES
DEEP BASE: AWA-DBR
U BASE: AWA-UBR


120Vac BASE: AWA-DBR-120


NOTES:


- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
- IP65 WITH USE OF AWA-DBR, AWA-DBR-120, OR AWA-UBR BASE.



	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
ı	RELEASED FROM ENGINEERING	12/8/05	
Α	ADDED BASE & RoHS NOTES	5/18/07	R.W.
В	REVISED DETAIL "A" DIL SWITCH	3/11/09	B.R.





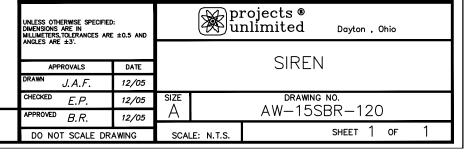

FILE NAME

AW-15SBR-120.DWG