I. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES): BODY, FERRULE, RETAINING RING - BERYLLIUM COPPER, WHITE BRONZE PLATED MIN 80 THICK CONTACT - BERYLLIUM COPPER, GOLD PLATING MIN 30 THICK INSULATOR - PTFE

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

B. DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS, MIN.

3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN. B. TEMPERATURE RANGE: -65°C to +165°C

4. CRIMPED FERRULE HEX CRIMP SIZE .105"


5. CENTER CONDCUTOR TO BE SOLDERED TO CENTER CONTACT

6. PACKAGING:

A. QUANTITY: SINGLE PACK


B. MARKING: BAG TO BE MARKED


"AMPHENOL, 902-NM5808, DATE CODE AND REV LEVEL"

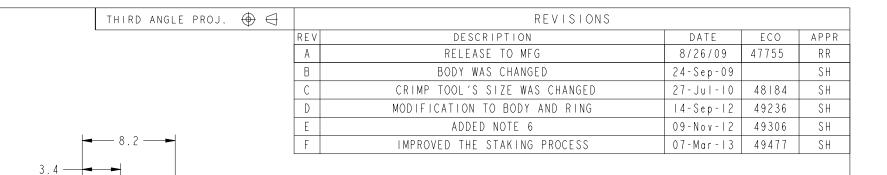

RECOMMENDED CABLE STRIPPING DIM'S

2.5

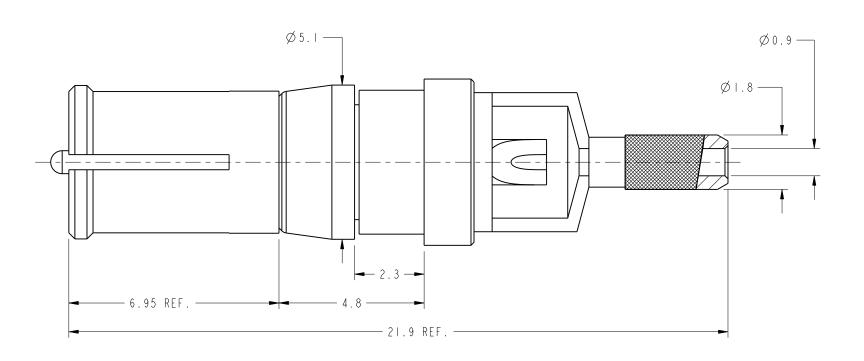

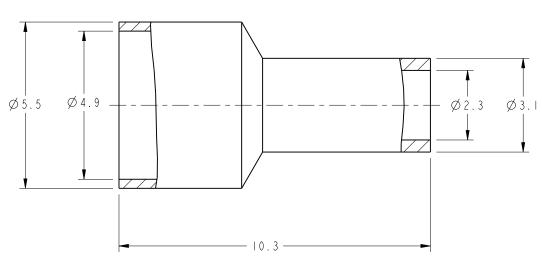

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <pre><0.5mm 0.5 - 6mm 6 - 30mm</pre>	MATERIAL SEE NOTES	DRAWN T.DENG	DATE 07-Mar-13	TITLE D-SUB CRIMP JAC	Amphenol RF
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon requiest; and (3) arre confidential and not to be disclosed to any person other than those to whom they		ENGINEER R.RAJAN	DATE 20 - Aug - 09	FOR RG 178	www.amphenolrf.com
are given by Amphenol Corp. the funishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any	REFERENCE EAR #2800	APPROVED S.HSIEH	DATE 07-Mar-13	NON-MAGNETIC SCALE: 6.0:1.0 SHEET 2 OF 2	DRAWING NO.902-NM5808
product, process or design, patented or otherwsie, that may in any way be related to	CONFIGURATION LEVEL:	CAD FILE		DWG SIZĖ R	Ł V
or disclosed by said drawings, specifications, or other data.	FINISH			В	F PART NO.902-NM5808