THE INFORMATION CONTAINED HEREIN IS CONSIDERED 'PROPRIETARY' TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

SCHEMATIC

IC

-o 7



ELECTRICAL PARAMETERS (@25°C)

NOMINAL TURNS RATIO:

(1-5):(9-7)

4.5 : 1

3mH ±6%

100pF MAX

CONNECT TERMINAL 2 TO 4

DC RESISTANCE:

0.60 Ω MAX (9-7)(1-4)1.60 Ω MAX (2-5)1.60 Ω MAX

INDUCTANCE @ 10 kHz, 0.1 Vrms:

(1-5)

CONNECT TERMINAL 2 TO 4

LEAKAGE INDUCTANCE:

 $25 \mu H MAX$ (1-5)

CONNECT TERMINAL 2 TO 4 & 9 TO 7

INTERWINDING CAPACITANCE

BETWEEN 1 & 9

CONNECT TERMINAL 2 TO 4

TOTAL HARMONIC DISTORTION:

3kHz, 1Vrms, 35 mA DC -78dB MAX

DIELECTRIC RATING:

BETWEEN (1-5) & (9-7) 1500 Vrms, 50Hz/60Hz

DESIGNED TO COMPLY WITH THE REQUIREMENTS OF UL1950 AND EN60950

OPERATING TEMPERATURE RANGE: -40°C to +85°C

[] METRIC DIM. AS REFERENCE STANDARD DIM. PART NO. / DRAWING NO. TOL. IN INCH DRWN DATE TITLE UNIT : INCH [mm] REV. : **ZHENG** 03-22-05 S5606600KM-F .x SCALE: N/A SIZE: A4 ELECTRICAL SPECIFICATION CHKD DATE FILE NAME .xx J.BERRY/KOT 03-22-05 \$5606600KMFA.DWG PAGE: 2 .XXX


FORM NO. - ENG02082001


LINE


THE INFORMATION CONTAINED HEREIN IS CONSIDERED 'PROPRIETARY' TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

0.100 [2.54] - 0.028 [0.71] - 5 0.100 [2.54] - 6

SUGGESTED PAD LAYOUT





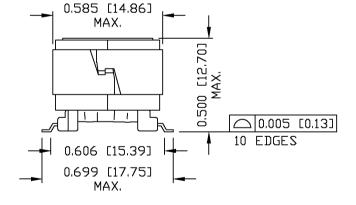


NDTES:

- 1. STANDARD MARKING REFER TO DOC. HAND-WORK-04.
- 2. PACKAGE CODE: "WCS003".

DRWN	DATE	TITLE
ZHENG	03-22-05	
CHKD	DATE	
MANC	03-22-05	

MECHANICAL DRAWING

PART NO. / DRAWING NO. \$5606600KM-F FILE NAME \$5606600KMFA.DWG

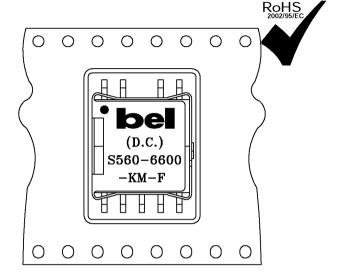

USER FEED DIRECTION

DRIENTATION OF COMPONENT INSIDE POCKET

TAPE WIDTH	32MM	
POCKET PITCH	24MM	
QUANTITY OF COMPONENTS PER REEL	200	
PLASTIC REEL DUTER DIAMETER	13 INCHES	
PLASTIC REEL HUB DIAMETER	4 INCHES	
COMPLY WITH EIA 481-2-A		

COMPONENTS FOR A CONNECTED PLANET