
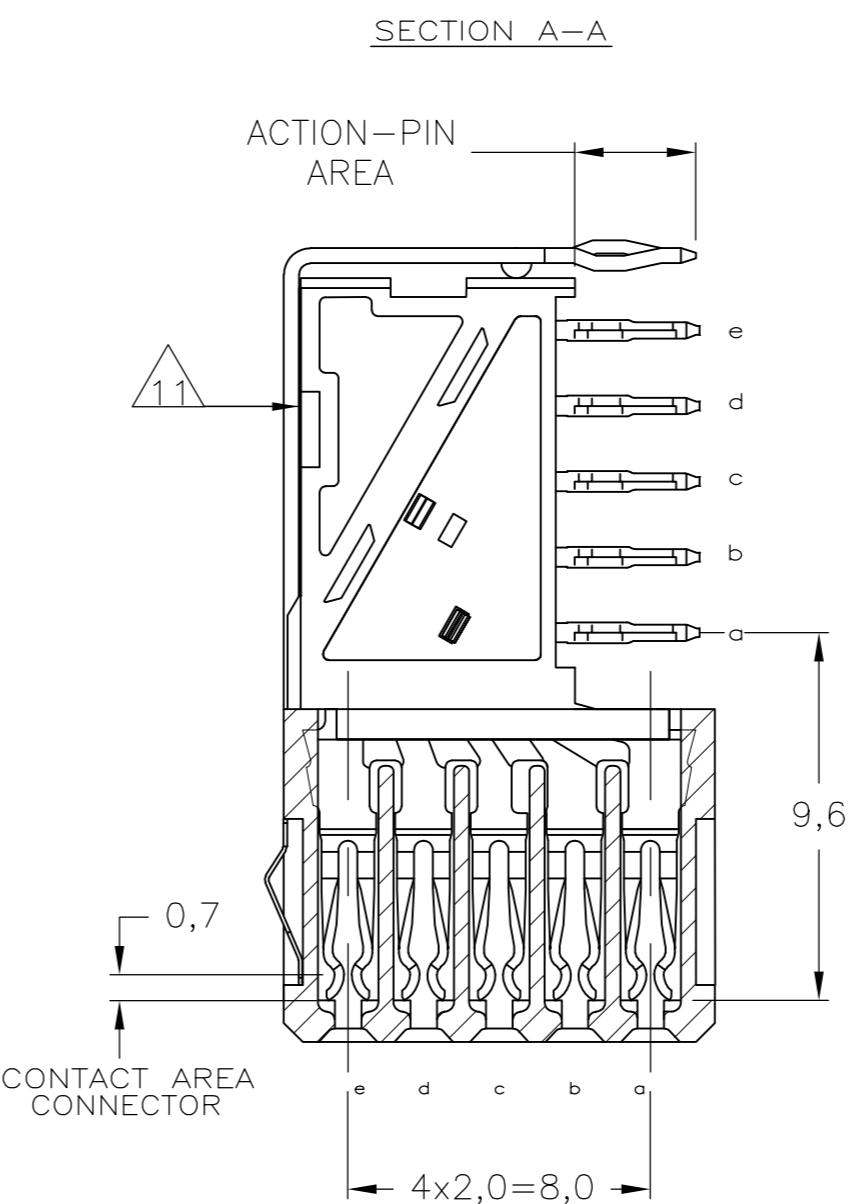




THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

© COPYRIGHT - By -

REVISIONS			
P	LTR	DESCRIPTION	DATE DWN APVD
F		REVISED PER ECR-16-013298	02JUN2017 FL SY

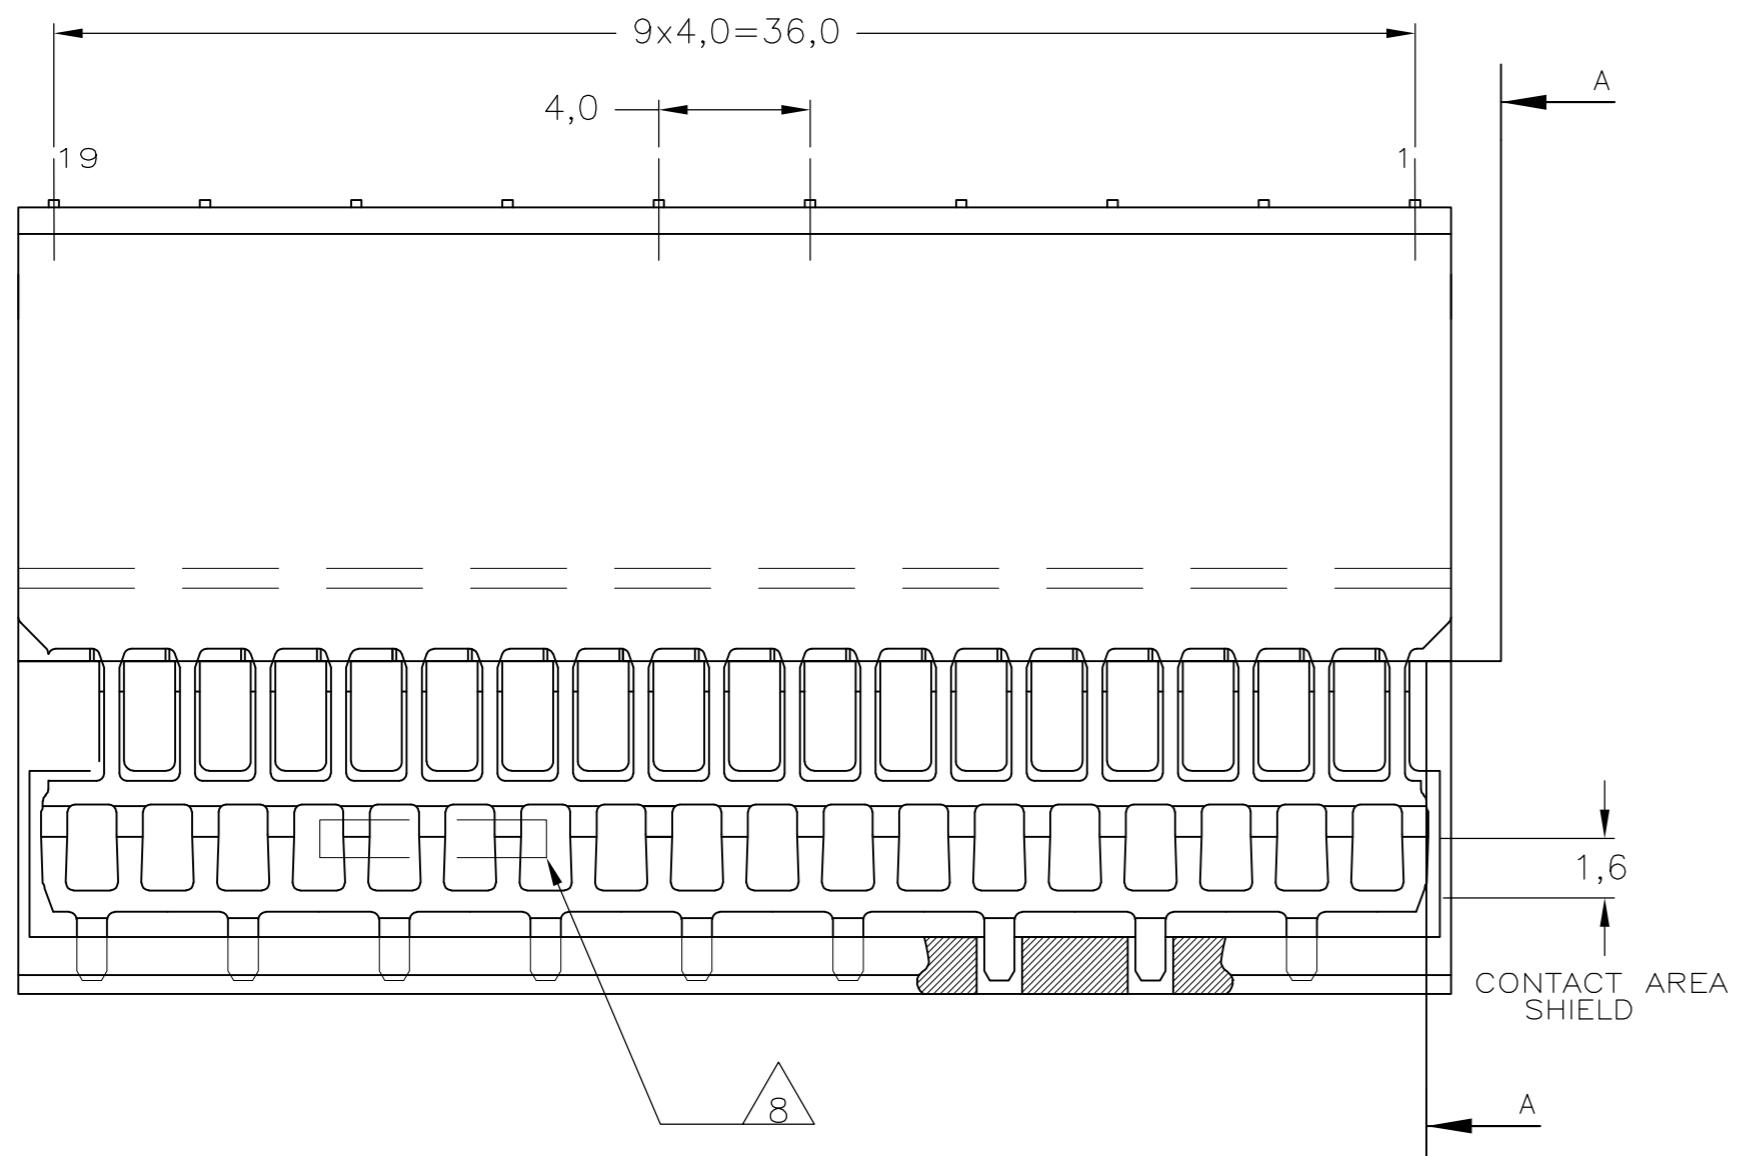


- NOTES:
- 1 MATERIAL CONTACTS; PHOSPHORBRONZE
 - 2 MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
 - 3 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN.
 - 4 FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - 5 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - 6 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - 7 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - 8 CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - 9 ASSEMBLY PRINTED WITH P/N AND DATECODE
 - 10 THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - 11 HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-19 COLUMNS 95 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - 12 ROW "f" 10 PLATED THROUGH HOLES FOR UPPERSHIELD
 - 13 SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE OR ADHESIVE
 - 14 BASIC P.N. LOWERSHIELD : 5352029.
 - 15 0.76mm MIN GOLD PLATING AT MATING SURFACE

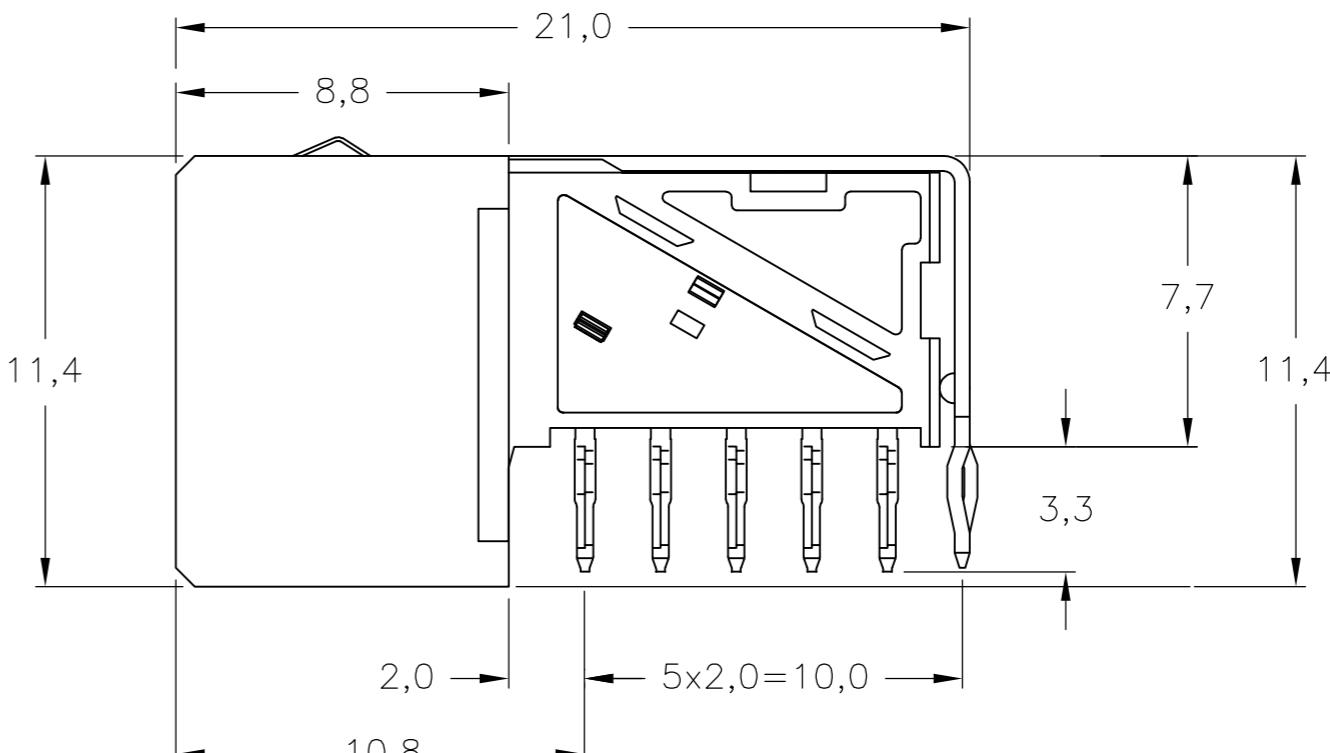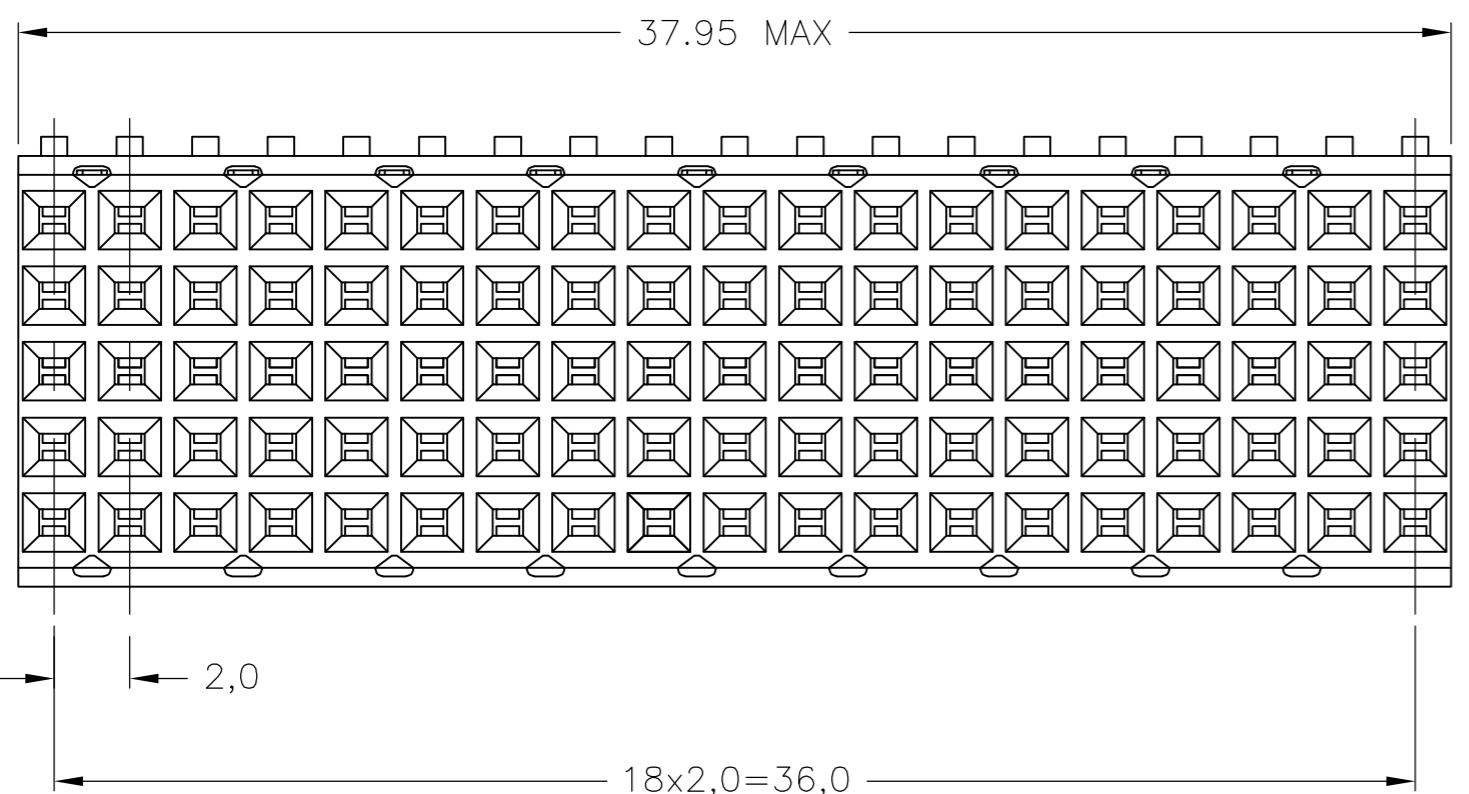

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT
SCALE 2,5:1

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

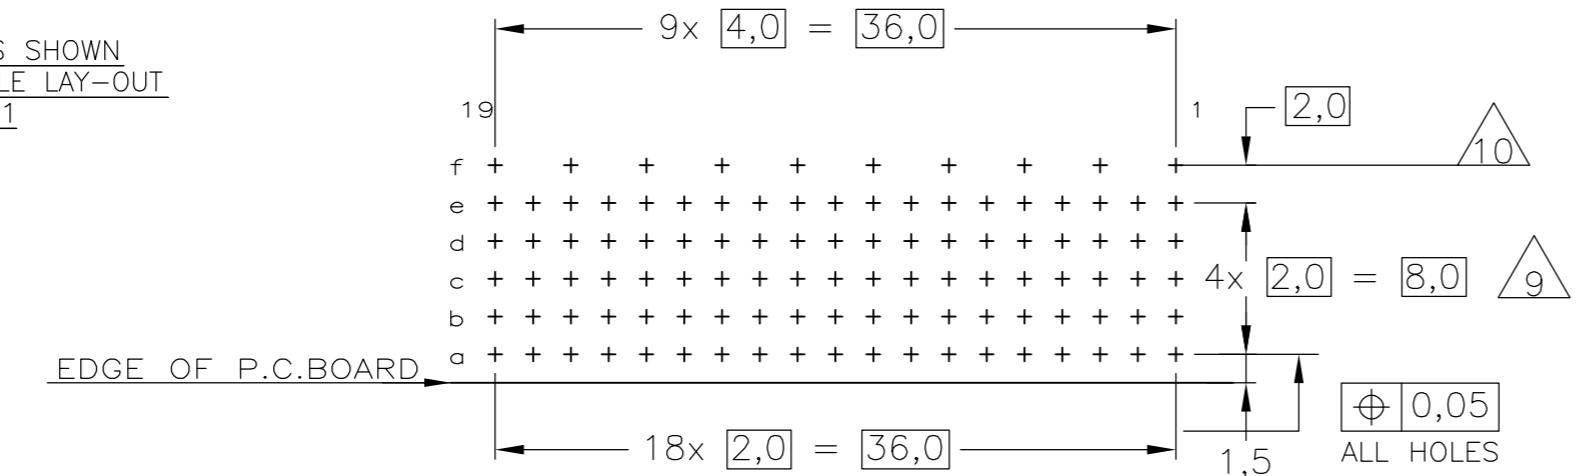

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:
APVD B.MOOIJ 27OCT2004
PRODUCT SPEC 108-19082
APPLICATION SPEC 114-19029
MATERIAL - FINISH -
ANGLE -

OBSOLETE		3-5352171-0	
△	△	△	5352171-9
△	△	△	5352171-4
△	△	△	5352171-1
FINISH		MATERIAL	PARTNUMBER
NAME		TE Connectivity	
Z-PACK 2mm HM		TYPE B - 19 COLUMNS	
PRE-SHIELDED RECEPTACLE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-5352171	-
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1 REV F