

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

B. FREQUENCY RANGE: DC - 20 GHz C. VSWR(RETURN LOSS): 33 dB @ DC-4 GHz

REAR INSULATOR - ULTEM, NATURAL

O-RING - SILICONE RUBBER, RED CAP - BRASS, WHITE BRONZÉ PLATING

30 dB @ 4 -6 GHz

D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN. F. INTERMODULATION 3rd ORDER: -166 dBc @2X20W

A. DURABILITY: 100 CYCLES MIN.


B. TEMPERATURE RANGE: -65° C TO +165° C


4 SHOWS CABLE ENTRY DIMENSIONS

5. PACKAGING:

A. QUANTITY: SINGLE PACK

B. MARKING: PACKAGING TO BE MARKED "AMPHENOL RF 225-106P-52A WWYY"

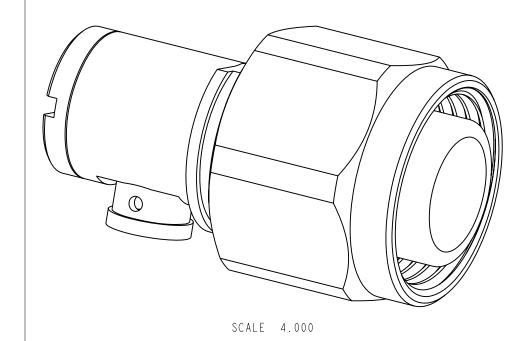

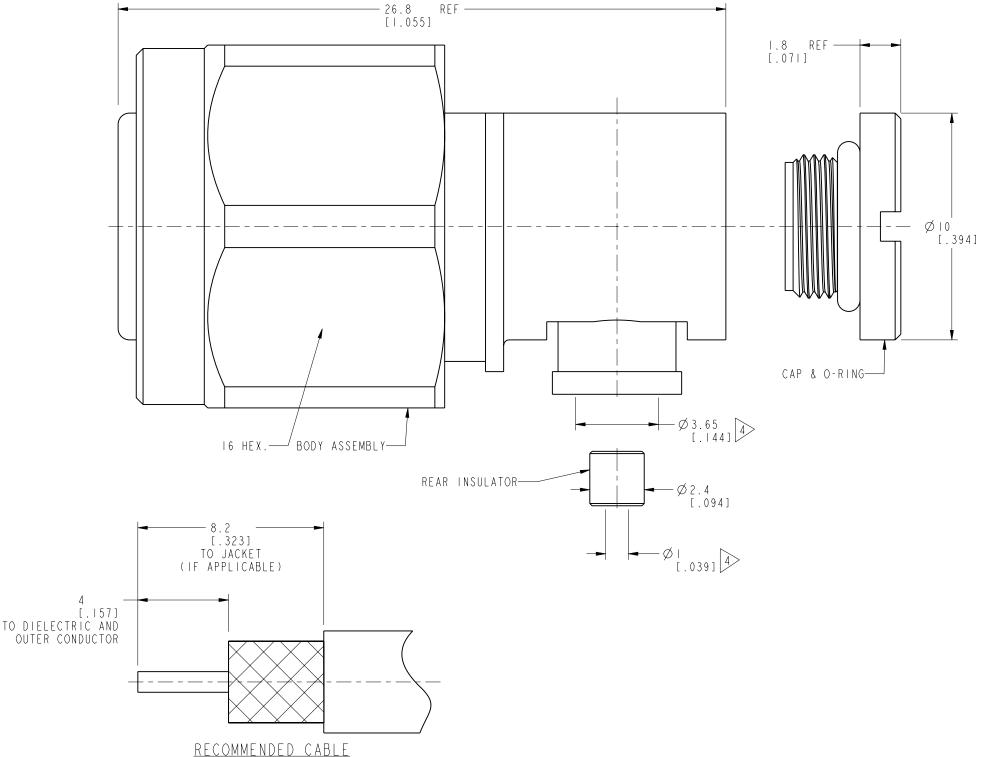

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

	MATERIAL	DRAWN	DATE	T
	OFF HOTEO	J.LUO	26 - Jun - 19	
r S	SEE NOTES	ENGINEER	DATE	
	REFERENCE	S.DUAN	2-Jul- 9	
	EAR# 8104	APPROVED	DATE	
	REF:	S.HSIEH	12-Jul-19	SC
	CONFIGURATION LEVEL: In Work	CAD FILE		
	FINISH			

STRIPPING DIMENSIONS

TITLE		
2.2-5 RA PLUG		
0.141" SEMI-R		
& CONFORMABLE	DRAWING	
SCALE: 6.0:1.0 SHEET 2 OF 2		
DWG SIZÉ	REV	ITEM NO.
В	Α	PART NO.

Amphenol RF www.amphenolrf.com				
	225-106P-52A			
	225-106P-52A			

ECN

12024

CJV