

Thin-Film RF/Microwave Inductor Technology

Accu-L® Series

L0201 Tight Tolerance RF Inductor



ACCU-L® TECHNOLOGY

The L0201 SMD Tuning Inductor is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

APPLICATIONS

- Mobile Communications
- Satellite TV Receivers
- GPS
- Vehicle Location Systems
- Wireless LAN's
- Filters
- Matching Networks

HOW TO ORDER



P/N Example: **L02013R3BHSTR**


Finished parts are 100% tested for electrical parameters and visual characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance: 125°C, IR, 4 hours

TERMINATION

Nickel/Lead Free solder coating compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.


DIMENSIONS: millimeters (inches) (TOP View)

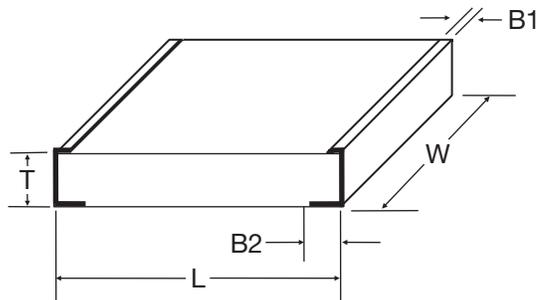

| | |
|----------|------------------------------|
| L | 0.600±0.050 (0.024±0.002) |
| W | 0.325±0.050 (0.013±0.002) |
| T | 0.225±0.050 (0.009±0.002) |

| | |
|-----------|------------------------------|
| B1 | 0.100±0.100 (0.004±0.004) |
| B2 | 0.150±0.050 (0.006±0.002) |

Recommended Pad Layout Dimensions mm (inches)

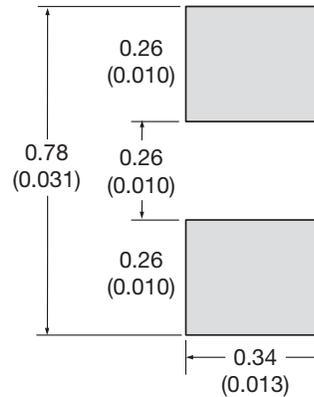

Thin-Film RF/Microwave Inductor Technology

Accu-L® Series

L0201 Tight Tolerance RF Inductor



ELECTRICAL SPECIFICATIONS

| L(nH) | 450MHz | | 900MHz | 1900MHz | 2400MHz | SRF min. (GHz) | R _{dc} max. (Ω) | I _{dc} max. (mA) |
|-------|---|---------|---------|---------|---------|----------------|--------------------------|---------------------------|
| | Tolerance A=±0.05nH, B=±0.1nH, C=±0.2nH, D=±0.5nH | Q (min) | Q (Typ) | Q (Typ) | Q (Typ) | | | |
| 0.33 | ±0.05nH, ± 0.1nH, ± 0.2nH | 13 | 24 | 36 | 39 | 35 | 0.1 | 550 |
| 0.39 | ±0.05nH, ± 0.1nH, ± 0.2nH | 11 | 23 | 34 | 38 | 33 | 0.1 | 550 |
| 0.47 | ±0.05nH, ± 0.1nH, ± 0.2nH | 10 | 18 | 26 | 30 | 32 | 0.1 | 550 |
| 0.56 | ±0.05nH, ± 0.1nH, ± 0.2nH | 9 | 16 | 24 | 27 | 31 | 0.1 | 500 |
| 0.68 | ±0.05nH, ± 0.1nH, ± 0.2nH | 8 | 19 | 28 | 32 | 30 | 0.2 | 500 |
| 0.82 | ±0.05nH, ± 0.1nH, ± 0.2nH | 8 | 19 | 28 | 32 | 28 | 0.2 | 400 |
| 1.0 | ±0.05nH, ± 0.1nH, ± 0.2nH | 7 | 16 | 26 | 30 | 26 | 0.2 | 400 |
| 1.2 | ±0.05nH, ± 0.1nH, ± 0.2nH | 7 | 16 | 26 | 30 | 24 | 0.3 | 300 |
| 1.5 | ± 0.1nH, ± 0.2nH, ± 0.5nH | 7 | 16 | 26 | 30 | 23 | 0.5 | 250 |
| 1.8 | ± 0.1nH, ± 0.2nH, ± 0.5nH | 7 | 15 | 25 | 29 | 20 | 0.5 | 250 |
| 2.2 | ± 0.1nH, ± 0.2nH, ± 0.5nH | 7 | 15 | 22 | 24 | 18 | 0.6 | 200 |
| 2.7 | ± 0.1nH, ± 0.2nH, ± 0.5nH | 7 | 15 | 22 | 24 | 14 | 0.7 | 180 |
| 3.3 | ± 0.1nH, ± 0.2nH, ± 0.5nH | 7 | 15 | 22 | 24 | 13 | 1.0 | 150 |

All intermediate Inductance values within the indicated range are available.