

LTE ANTENNA

Antenna LTE Mounting,
SMA(m), RG174/3m

BB-AO-ALTE-36S


BENEFITS

- Low VSWE
- High frequency range
- Easy installation



Technology	LTE
Frequency bands	700/800/900/1700/1800/2100/2500/2600/2700 MHz
Bandwidth	-
Gain	2 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	Ø54.4 x 24.6 mm
Weight	110.24 g
Operating temperature	-30 to +80 °C
Execution	External
Method of attachment	Mounting
Cable type	RG174/U
The cable length	3 m
Connector type	SMA(m)

DRAWING

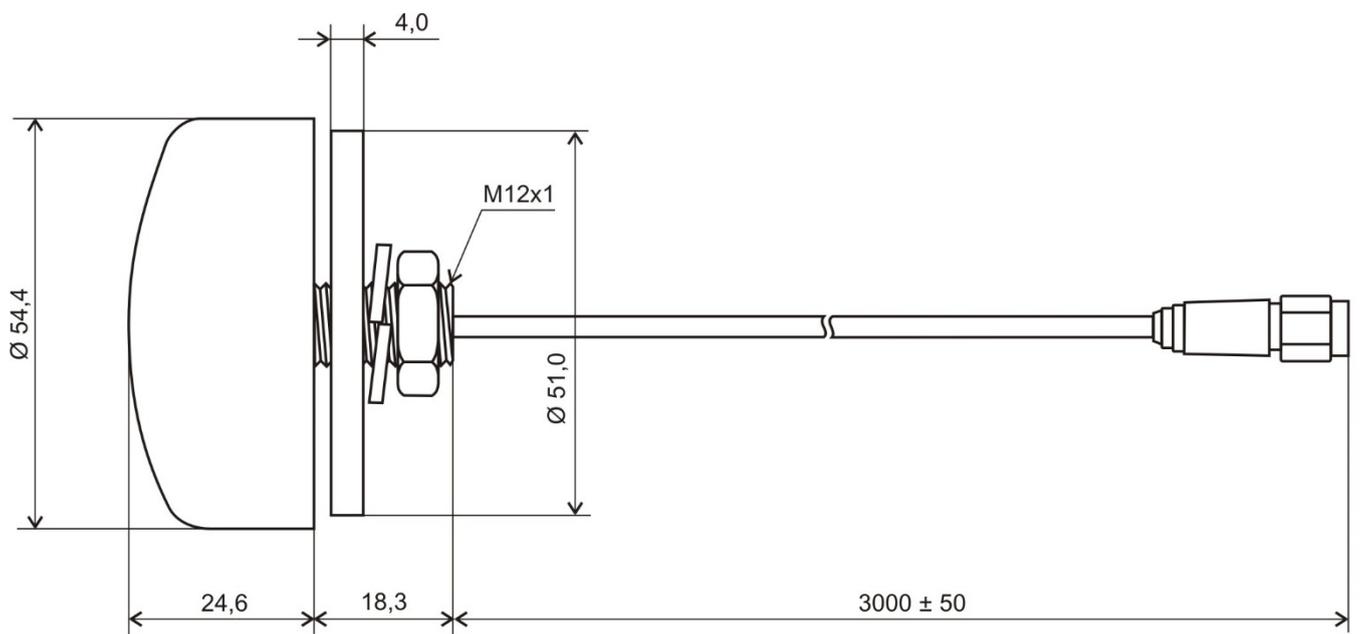

UNIT: mm