


International **IR** Rectifier

PD - 95367

IRF7350PbF

HEXFET® Power MOSFET

- Ultra Low On-Resistance
- Dual N and P Channel MOSFET
- Surface Mount
- Available in Tape and Reel
- Lead-Free




	N-Ch	P-Ch
V _{DSS}	100V	-100V
R _{DS(on)}	0.21Ω	0.48Ω

Description

These dual N and P channel HEXFET® power MOSFETs from International Rectifier utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET® power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in DC motor drives and load management applications.

The SO-8 has been modified through a customized leadframe for enhanced thermal characteristics and multiple-die capability making it ideal in a variety of power applications. With these improvements, multiple devices can be used in an application with dramatically reduced board space. The package is designed for vapor phase, infra red, or wave soldering techniques.



Absolute Maximum Ratings

	Parameter	Max.		Units
		N-Channel	P-Channel	
V _{DS}	Drain-to-Source Voltage	100	-100	A
I _D @ T _A = 25°C	Continuous Drain Current, V _{GS} @ 10V	2.1	-1.5	
I _D @ T _A = 70°C	Continuous Drain Current, V _{GS} @ 10V	1.7	-1.2	
I _{DM}	Pulsed Drain Current ①	8.4	-6.0	
P _D @ T _A = 25°C	Power Dissipation	2.0		W
	Linear Derating Factor	0.016		W/°C
E _{AS}	Single Pulse Avalanche Energy④	35	51	mJ
V _{GS}	Gate-to-Source Voltage	± 20	± 20	V
dv/dt	Peak Diode Recovery dv/dt ②	4.0	4.3	V/ns
T _J , T _{STG}	Junction and Storage Temperature Range	-55 to + 150		°C

Thermal Resistance

Symbol	Parameter	Typ.	Max.	Units
R _{θJL}	Junction-to-Drain Lead	—	20	°C/W
R _{θJA}	Junction-to-Ambient ③	—	62.5	

IRF7350PbF

International
Rectifier

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter		Min.	Typ.	Max.	Units	Conditions
$V_{(\text{BR})\text{DSS}}$	Drain-to-Source Breakdown Voltage	N-Ch	100	—	—	V	$V_{GS} = 0V, I_D = 250\mu\text{A}$
		P-Ch	-100	—	—		$V_{GS} = 0V, I_D = -250\mu\text{A}$
$\Delta V_{(\text{BR})\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	N-Ch	—	0.12	—	$\text{V}/^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = 1\text{mA}$
		P-Ch	—	-0.11	—		Reference to $25^\circ\text{C}, I_D = -1\text{mA}$
$R_{DS(\text{ON})}$	Static Drain-to-Source On-Resistance	N-Ch	—	—	0.21	Ω	$V_{GS} = 10V, I_D = 2.1\text{A}$ ②
		P-Ch	—	—	0.48		$V_{GS} = -10V, I_D = -1.5\text{A}$ ②
$V_{GS(\text{th})}$	Gate Threshold Voltage	N-Ch	2.0	—	4.0	V	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$
		P-Ch	-2.0	—	-4.0		$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$
g_f	Forward Transconductance	N-Ch	2.4	—	—	S	$V_{DS} = 50V, I_D = 2.1\text{A}$
		P-Ch	1.1	—	—		$V_{DS} = -50V, I_D = -1.5\text{A}$
I_{DSS}	Drain-to-Source Leakage Current	N-Ch	—	—	25	μA	$V_{DS} = 100V, V_{GS} = 0V$ ②
		P-Ch	—	—	-25		$V_{DS} = -100V, V_{GS} = 0V$ ②
		N-Ch	—	—	250		$V_{DS} = 80V, V_{GS} = 0V, T_J = 70^\circ\text{C}$
		P-Ch	—	—	-250		$V_{DS} = -80V, V_{GS} = 0V, T_J = 70^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	N-P	—	—	± 100		$V_{GS} = \pm 20V$
Q_g	Total Gate Charge	N-Ch	—	19	28	nC	N-Channel $I_D = 2.1\text{A}, V_{DS} = 80V, V_{GS} = 10V$
		P-Ch	—	21	31		P-Channel $I_D = -1.5\text{A}, V_{DS} = -80V, V_{GS} = -10V$
Q_{gs}	Gate-to-Source Charge	N-Ch	—	3.0	4.5		
		P-Ch	—	3.4	5.1		
Q_{gd}	Gate-to-Drain ("Miller") Charge	N-Ch	—	8.8	13		
		P-Ch	—	10	16		
$t_{d(on)}$	Turn-On Delay Time	N-Ch	—	6.7	—		
		P-Ch	—	25	—		
t_r	Rise Time	N-Ch	—	11	—		
		P-Ch	—	13	—		
$t_{d(off)}$	Turn-Off Delay Time	N-Ch	—	35	—	ns	P-Channel $V_{DD} = -50V, I_D = -1.0\text{A}, R_G = 22\Omega, R_D = 50\Omega, V_{GS} = -10V$ ②
		P-Ch	—	30	—		
t_f	Fall Time	N-Ch	—	20	—		
		P-Ch	—	40	—		
C_{iss}	Input Capacitance	N-Ch	—	380	—	pF	N-Channel $V_{GS} = 0V, V_{DS} = 25V, f = 1.0\text{MHz}$
		P-Ch	—	360	—		
C_{oss}	Output Capacitance	N-Ch	—	100	—		P-Channel $V_{GS} = 0V, V_{DS} = -25V, f = 1.0\text{MHz}$
		P-Ch	—	110	—		
C_{rss}	Reverse Transfer Capacitance	N-Ch	—	54	—		
		P-Ch	—	65	—		

Source-Drain Ratings and Characteristics

	Parameter		Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	N-Ch	—	—	1.8	A	
		P-Ch	—	—	-1.4		
I_{SM}	Pulsed Source Current (Body Diode) ①	N-Ch	—	—	8.4		
		P-Ch	—	—	-6.0		
V_{SD}	Diode Forward Voltage	N-Ch	—	1.3	—	V	$T_J = 25^\circ\text{C}, I_S = 1.8\text{A}, V_{GS} = 0V$ ②
		P-Ch	—	—	-1.6		$T_J = 25^\circ\text{C}, I_S = -1.4\text{A}, V_{GS} = 0V$ ②
t_{rr}	Reverse Recovery Time	N-Ch	—	72	110	ns	N-Channel $T_J = 25^\circ\text{C}, I_F = 1.8\text{A}, di/dt = 100\text{A}/\mu\text{s}$
		P-Ch	—	77	120		P-Channel $T_J = 25^\circ\text{C}, I_F = -1.4\text{A}, di/dt = -100\text{A}/\mu\text{s}$ ②
Q_{rr}	Reverse Recovery Charge	N-Ch	—	205	310	nC	
		P-Ch	—	240	360		

Notes:

① Repetitive rating; pulse width limited by max. junction temperature.

④ N channel: Starting $T_J = 25^\circ\text{C}, L = 4.0\text{mH}, R_G = 25\Omega, I_{AS} = 4.2\text{A}$
P channel: Starting $T_J = 25^\circ\text{C}, L = 11\text{mH}, R_G = 25\Omega, I_{AS} = -3.0\text{A}$

② Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.

③ Surface mounted on 1 in square Cu board

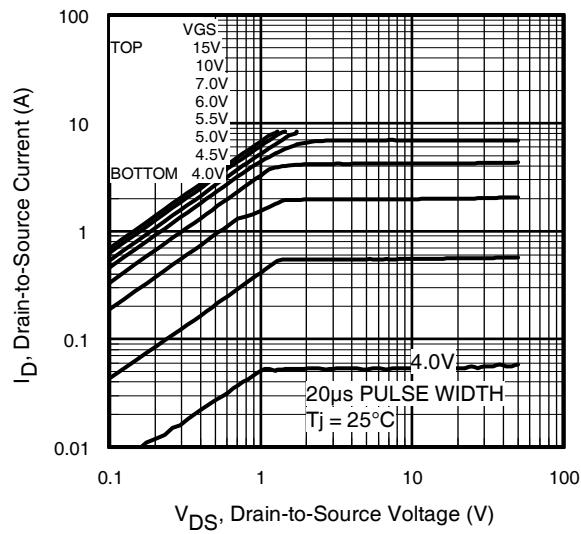


Fig 1. Typical Output Characteristics

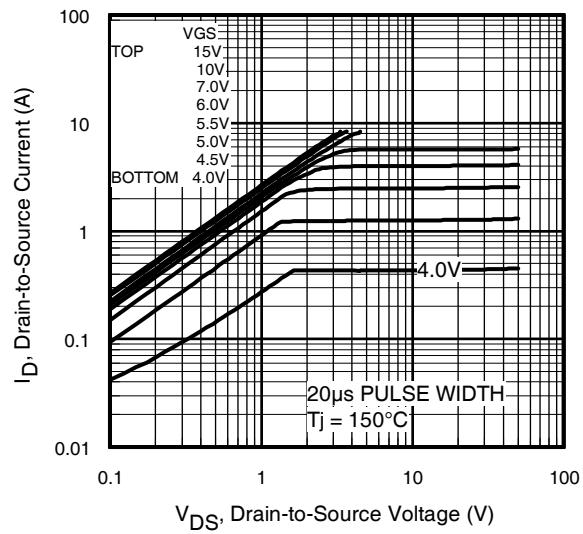


Fig 2. Typical Output Characteristics

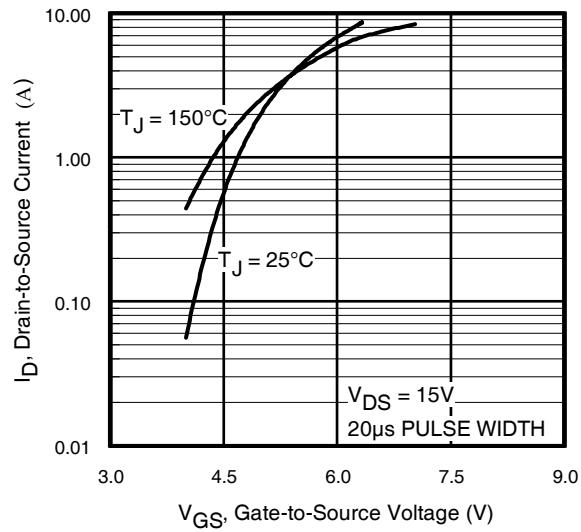


Fig 3. Typical Transfer Characteristics

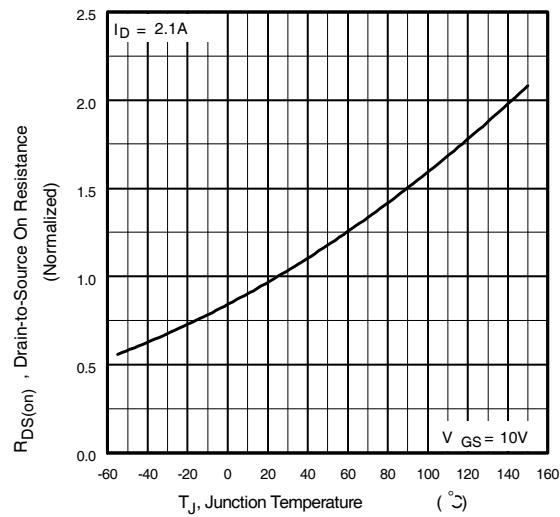


Fig 4. Normalized On-Resistance
Vs. Temperature

IRF7350PbF

N-CHANNEL

International
IR Rectifier

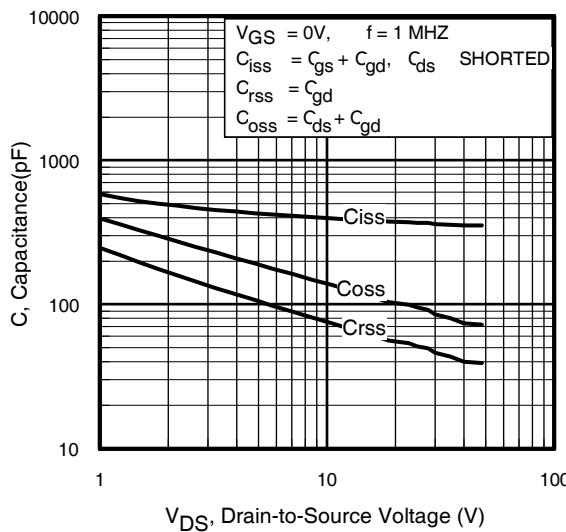


Fig 5. Typical Capacitance Vs.
Drain-to-Source Voltage

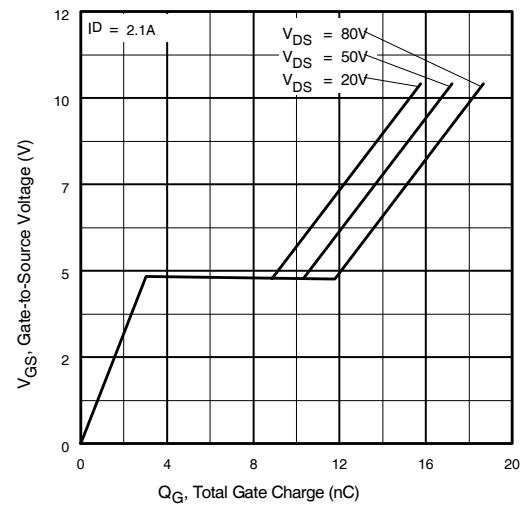


Fig 6. Typical Gate Charge Vs.
Gate-to-Source Voltage

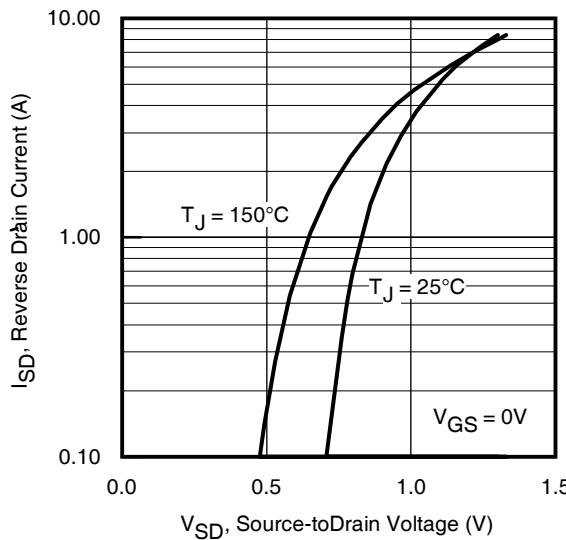


Fig 7. Typical Source-Drain Diode
Forward Voltage

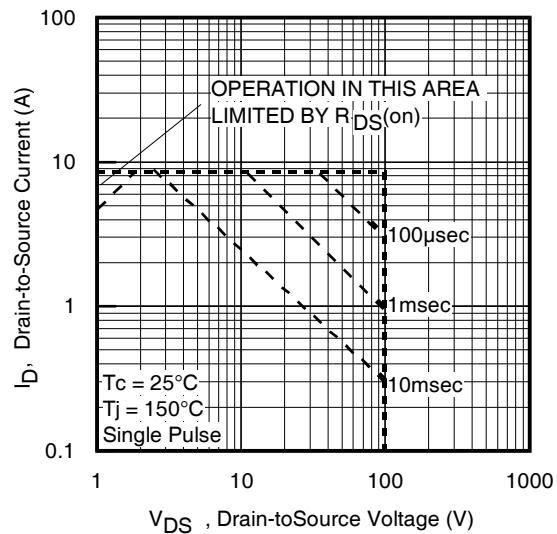


Fig 8. Maximum Safe Operating Area

IRF7350PbF

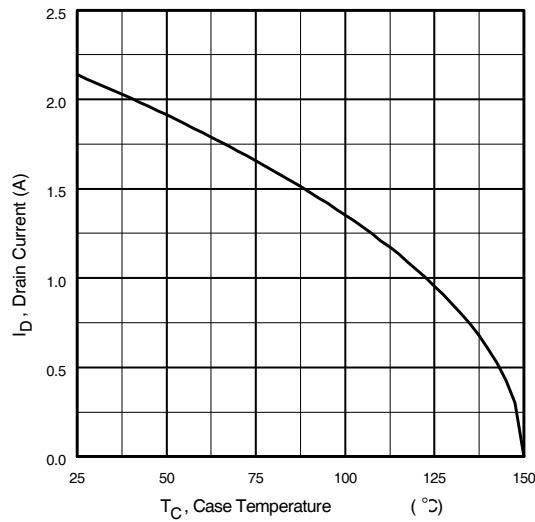


Fig 9. Maximum Drain Current Vs.
Case Temperature

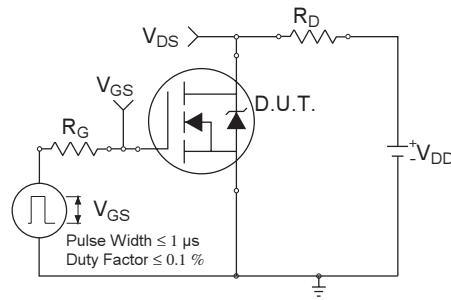


Fig 10a. Switching Time Test Circuit

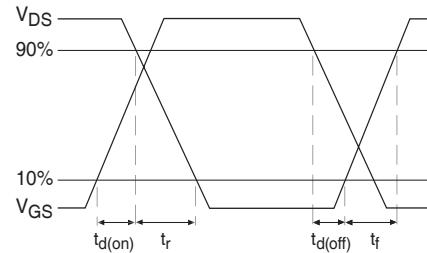


Fig 10b. Switching Time Waveforms

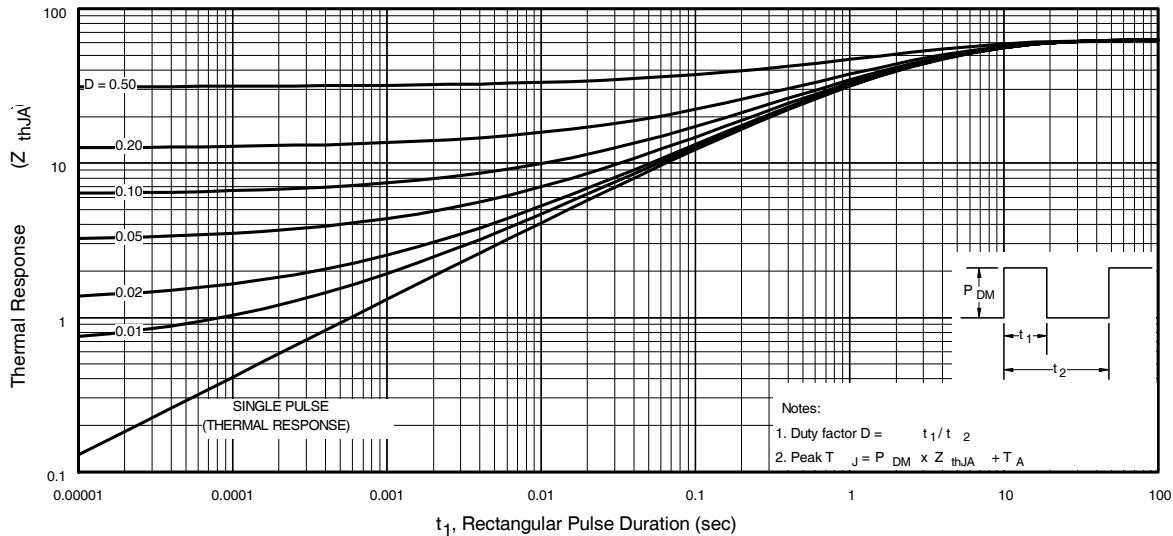


Fig 11. Typical Effective Transient Thermal Impedance, Junction-to-Ambient

IRF7350PbF

N-CHANNEL

International
IR Rectifier

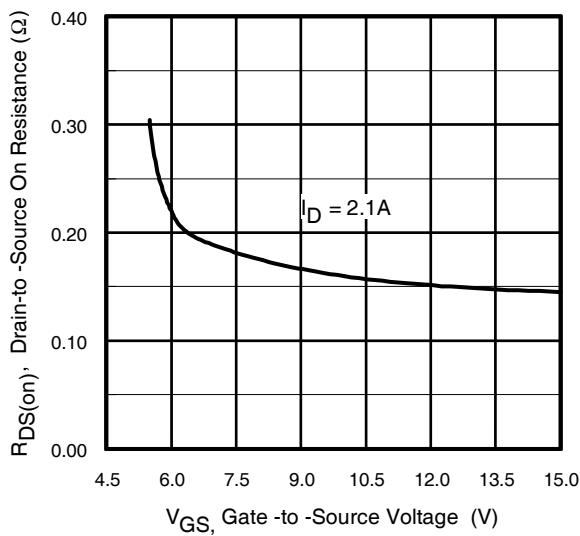


Fig 12. Typical On-Resistance Vs. Gate Voltage

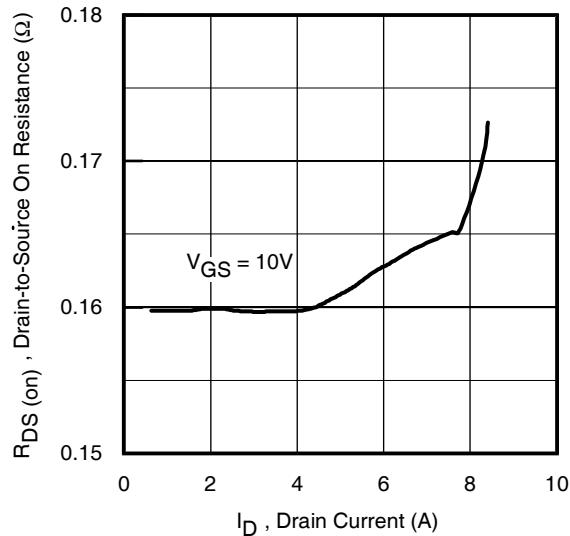


Fig 13. Typical On-Resistance Vs. Drain Current

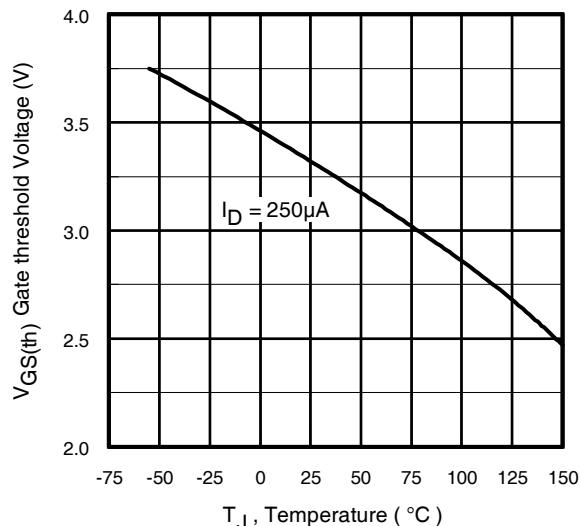


Fig 14. Typical Threshold Voltage Vs. Junction Temperature

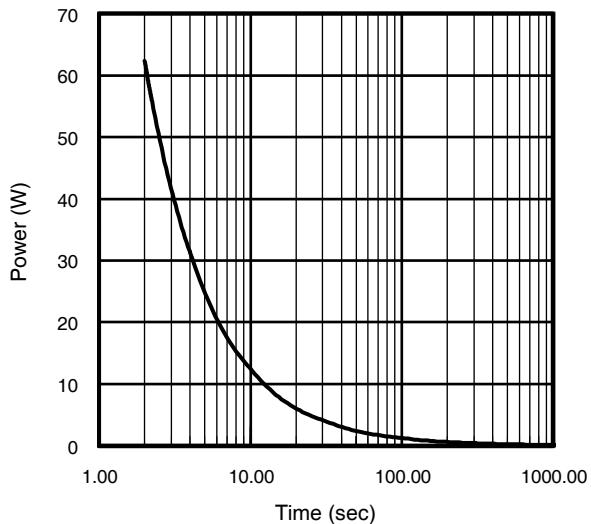


Fig 15. Typical Power Vs. Time

IRF7350PbF

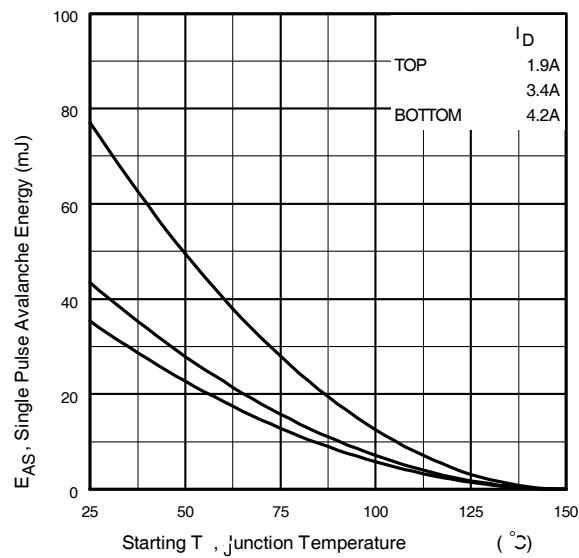


Fig 16a. Maximum Avalanche Energy Vs. Drain Current

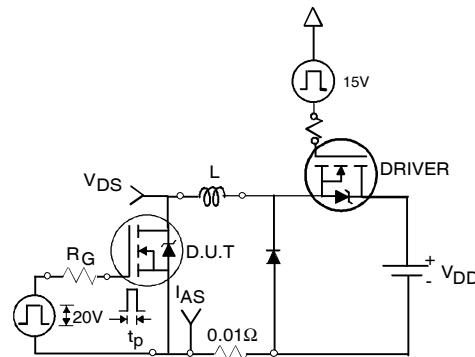


Fig 16c. Unclamped Inductive Test Circuit




Fig 16d. Unclamped Inductive Waveforms

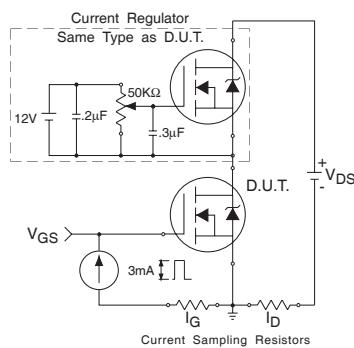


Fig 17. Gate Charge Test Circuit

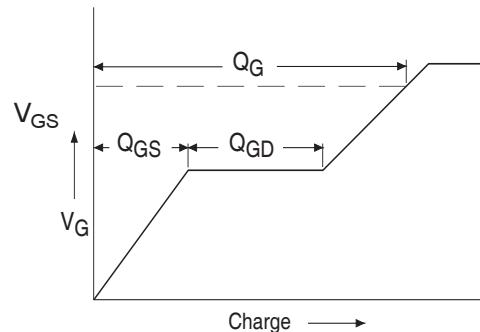


Fig 18. Basic Gate Charge Waveform

IRF7350PbF

N-CHANNEL

International
Rectifier

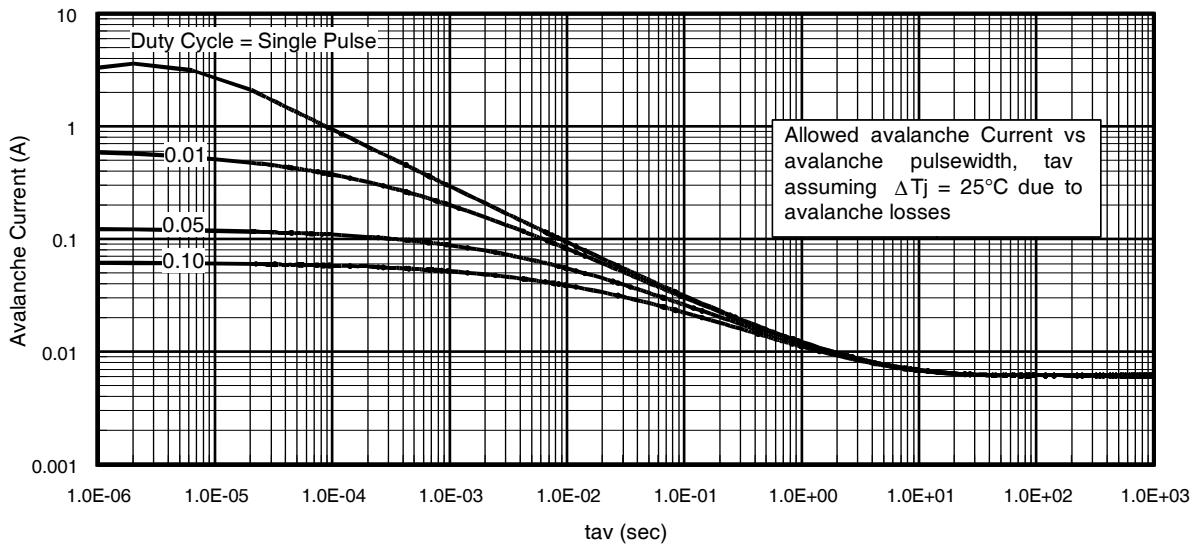


Fig 19. Typical Avalanche Current Vs.Pulsewidth

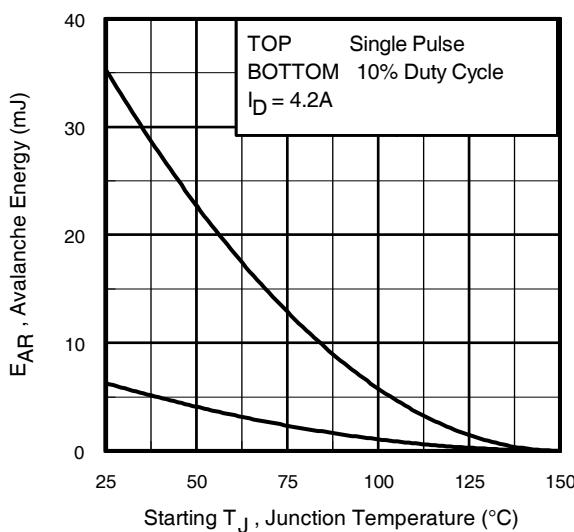


Fig 20. Maximum Avalanche Energy Vs. Temperature

Notes on Repetitive Avalanche Curves , Figures 15, 16: (For further info, see AN-1005 at www.irf.com)

1. Avalanche failures assumption:
Purely a thermal phenomenon and failure occurs at a temperature far in excess of T_{jmax} . This is validated for every part type.
2. Safe operation in Avalanche is allowed as long as T_{jmax} is not exceeded.
3. Equation below based on circuit and waveforms shown in Figures 12a, 12b.
4. $P_D(\text{ave})$ = Average power dissipation per single avalanche pulse.
5. BV = Rated breakdown voltage (1.3 factor accounts for voltage increase during avalanche).
6. I_{av} = Allowable avalanche current.
7. ΔT = Allowable rise in junction temperature, not to exceed T_{jmax} (assumed as 25°C in Figure 15, 16).
- t_{av} = Average time in avalanche.
- D = Duty cycle in avalanche = $t_{av} \cdot f$
- $Z_{thJC}(D, t_{av})$ = Transient thermal resistance, see figure 11)

$$P_D(\text{ave}) = 1/2 (1.3 \cdot BV \cdot I_{av}) = \Delta T / Z_{thJC}$$

$$I_{av} = 2\Delta T / [1.3 \cdot BV \cdot Z_{th}]$$

$$E_{AS(AR)} = P_D(\text{ave}) \cdot t_{av}$$

IRF7350PbF

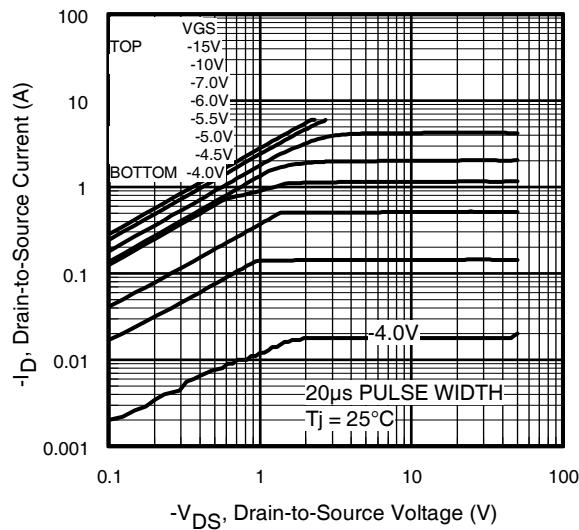


Fig 21. Typical Output Characteristics

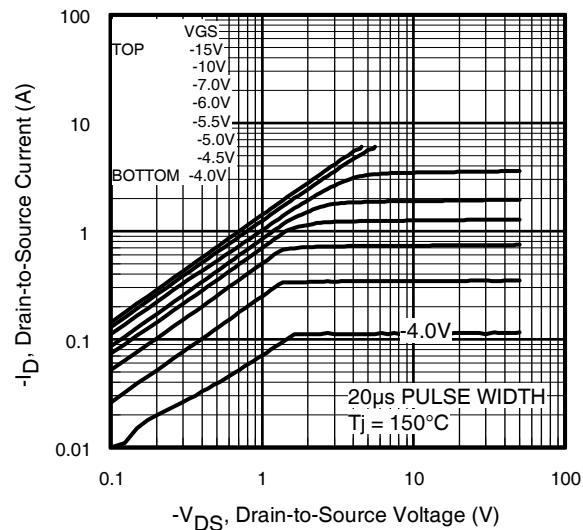


Fig 22. Typical Output Characteristics

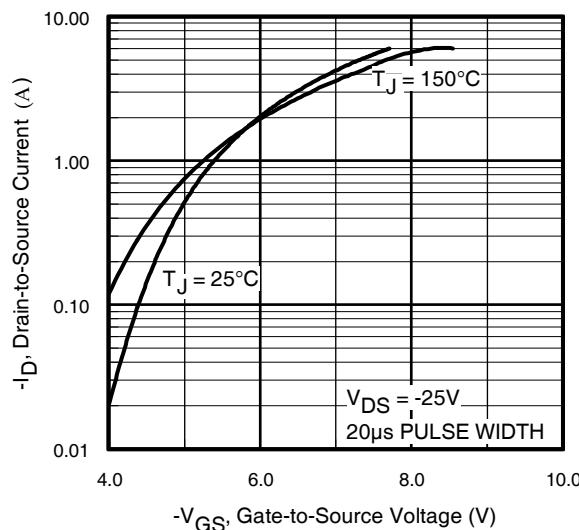


Fig 23. Typical Transfer Characteristics

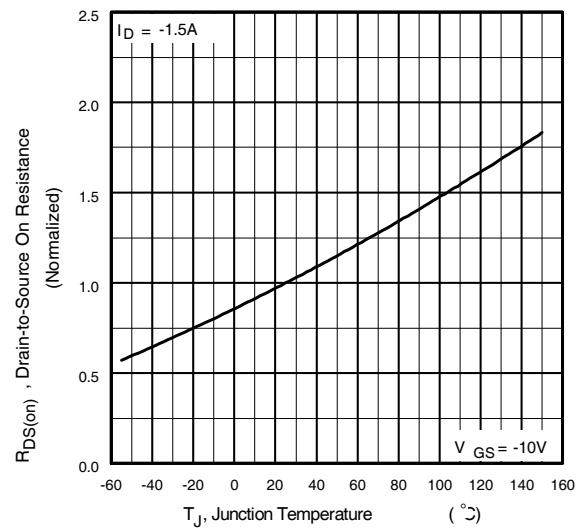


Fig 24. Normalized On-Resistance
Vs. Temperature

IRF7350PbF

P-CHANNEL

International
IR Rectifier

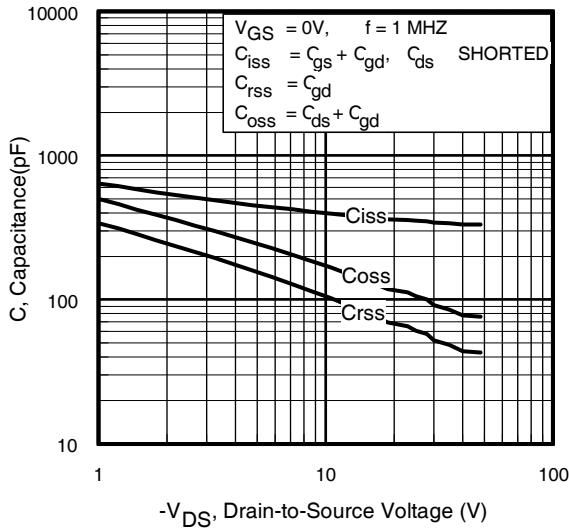


Fig 25. Typical Capacitance Vs.
Drain-to-Source Voltage

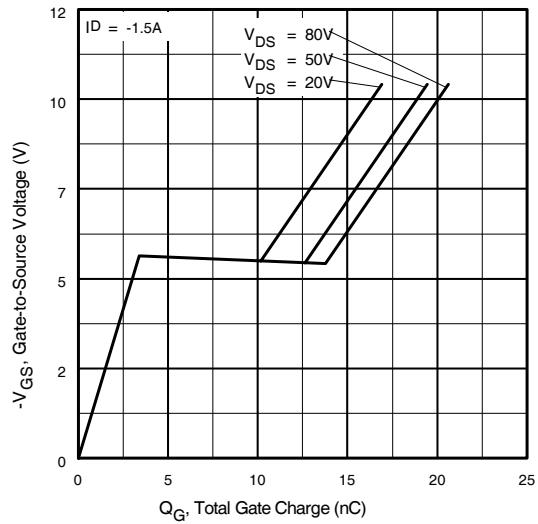


Fig 26. Typical Gate Charge Vs.
Gate-to-Source Voltage

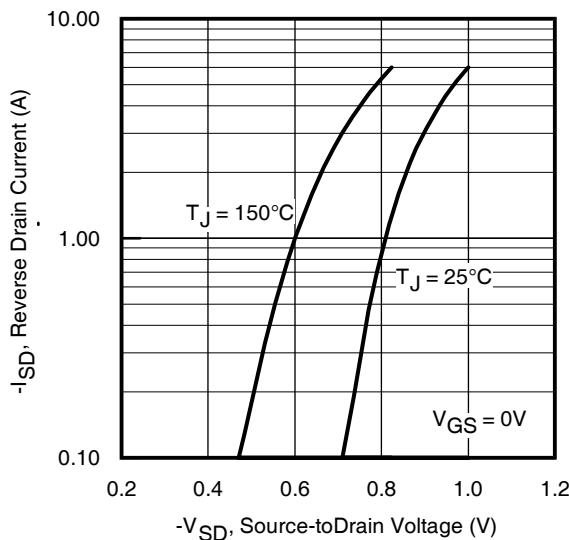


Fig 27. Typical Source-Drain Diode
Forward Voltage

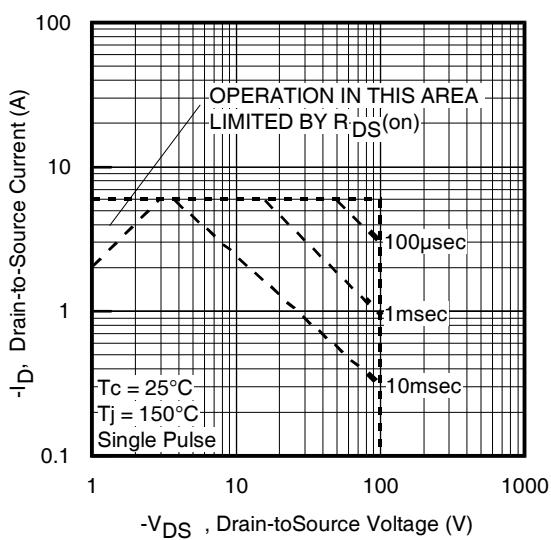


Fig 28. Maximum Safe Operating Area

IRF7350PbF

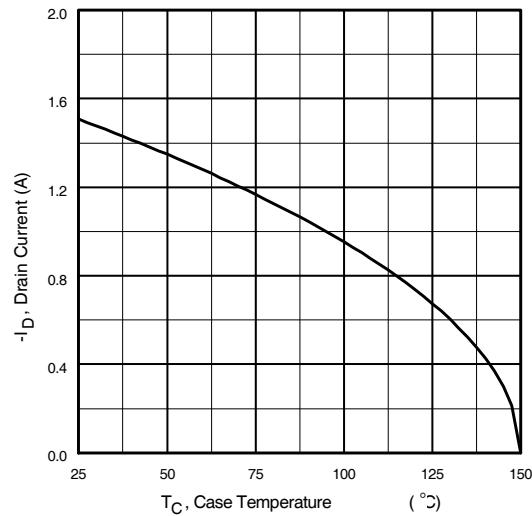


Fig 29. Maximum Drain Current Vs.
Case Temperature

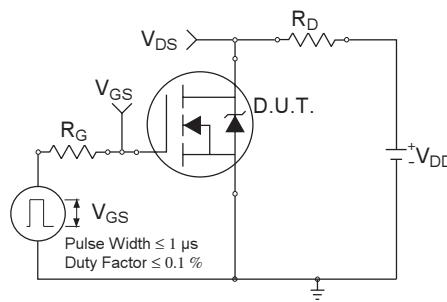


Fig 10a. Switching Time Test Circuit

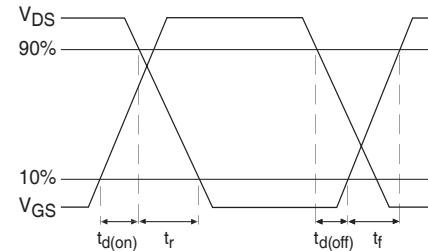


Fig 10b. Switching Time Waveforms

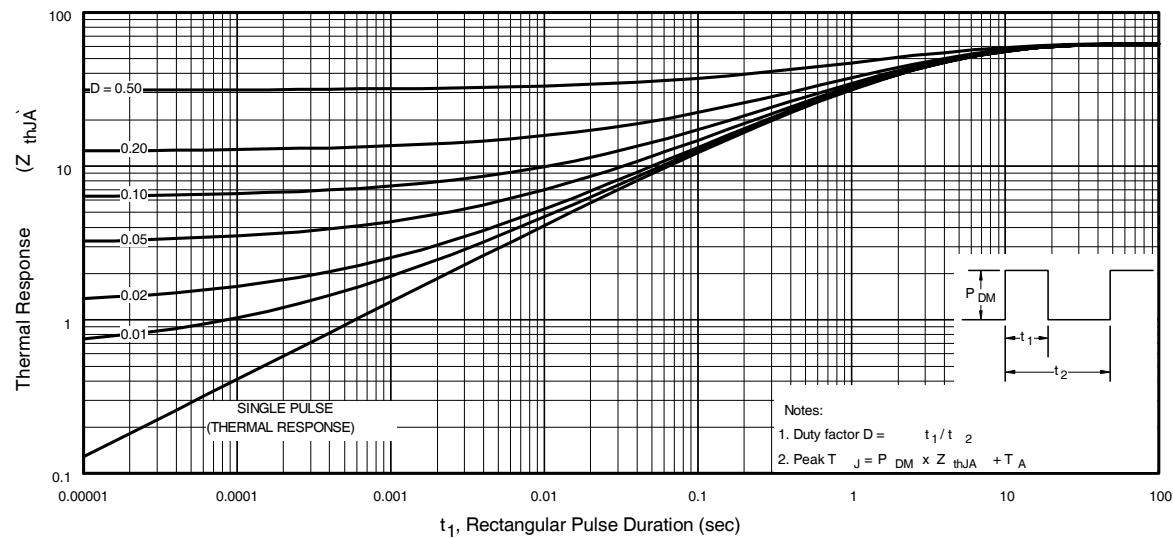


Fig 30. Typical Effective Transient Thermal Impedance, Junction-to-Ambient

IRF7350PbF

P-CHANNEL

International
IR Rectifier

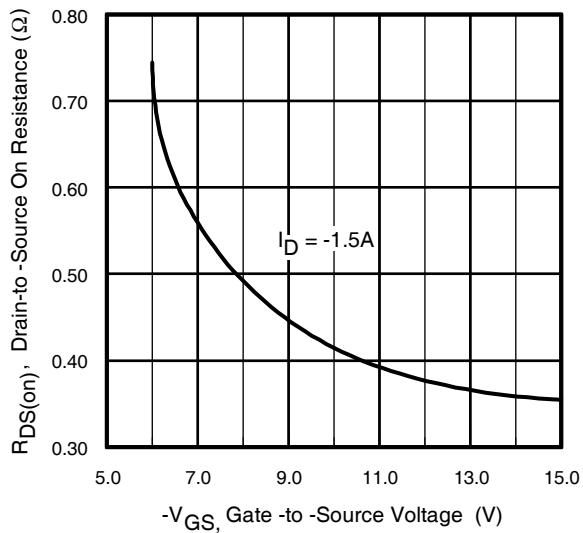


Fig 31. Typical On-Resistance Vs. Gate Voltage

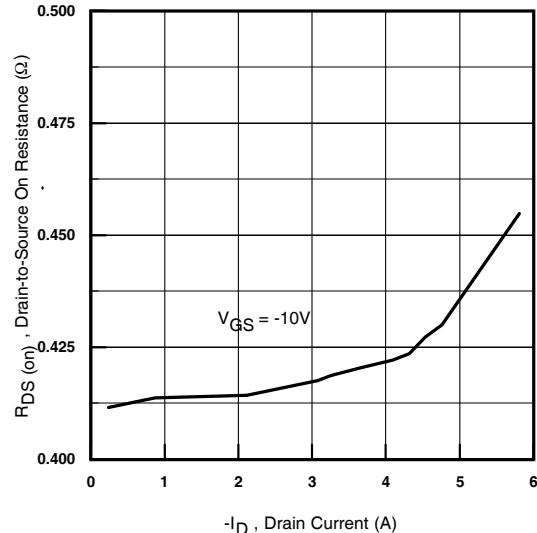


Fig 32. Typical On-Resistance Vs. Drain Current

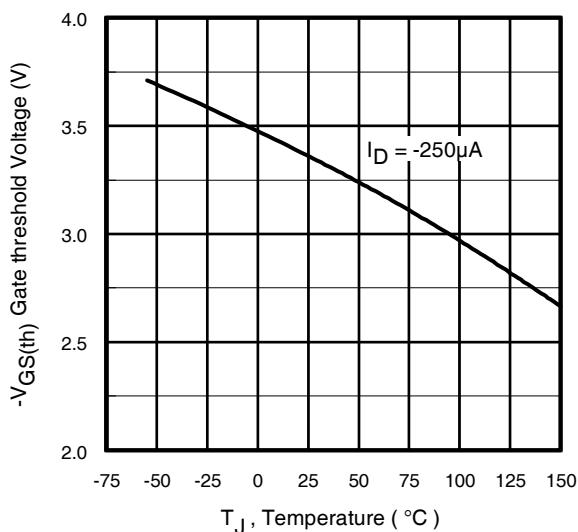


Fig 33. Typical Threshold Voltage Vs. Junction Temperature

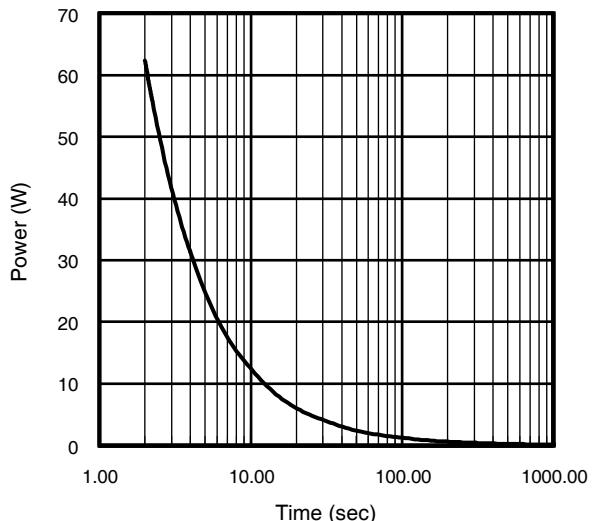


Fig 34. Typical Power Vs. Time

IRF7350PbF

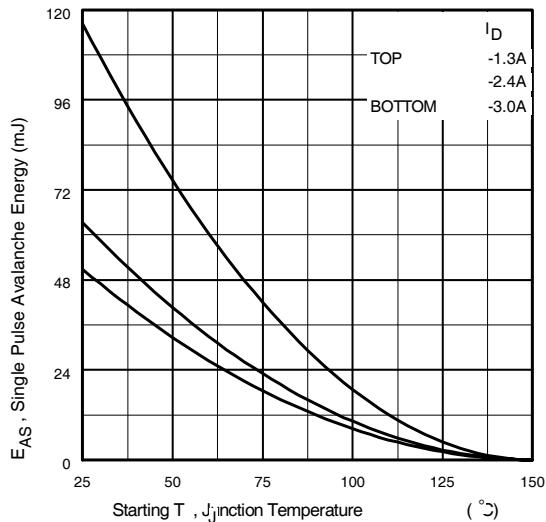


Fig 35a. Maximum Avalanche Energy Vs. Drain Current

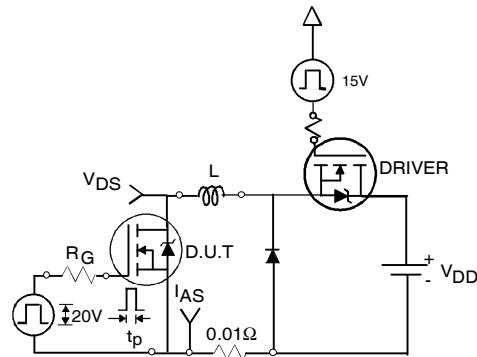


Fig 35c. Unclamped Inductive Test Circuit




Fig 35d. Unclamped Inductive Waveforms

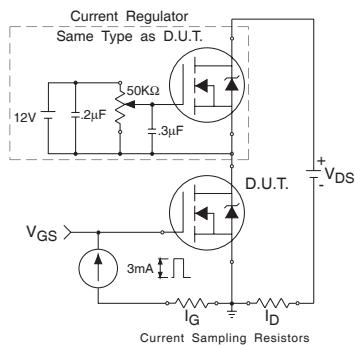


Fig 36. Gate Charge Test Circuit

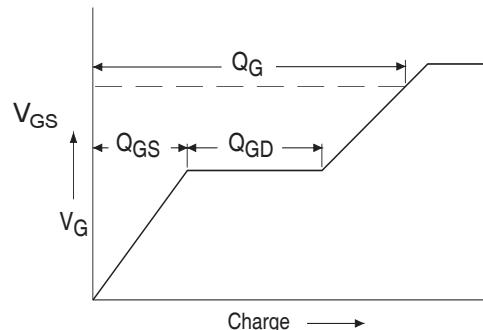


Fig 37. Basic Gate Charge Waveform

IRF7350PbF

P-CHANNEL

International
IR Rectifier

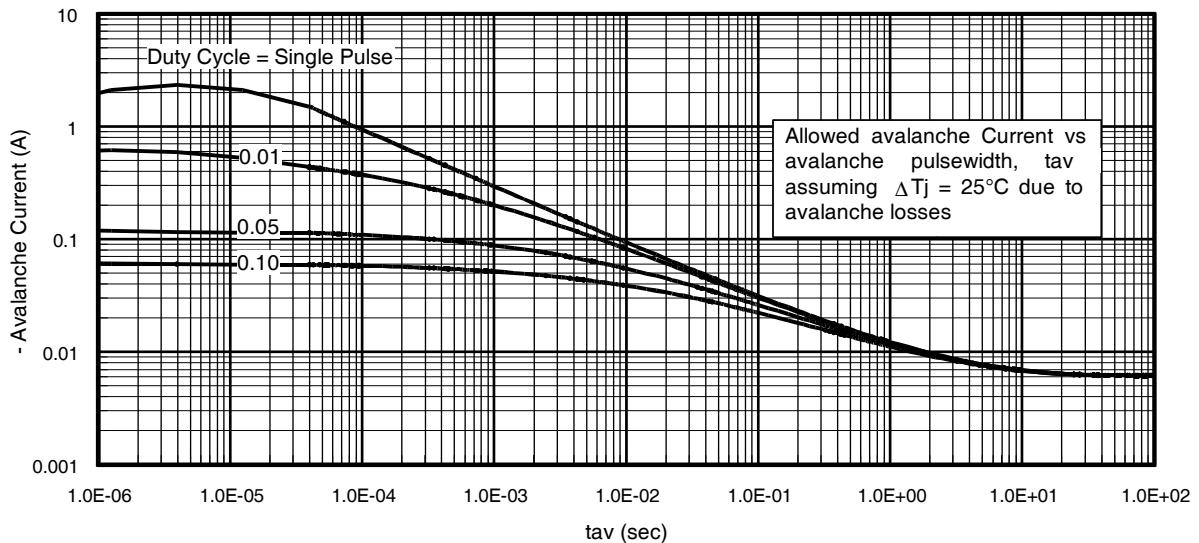


Fig 38. Typical Avalanche Current Vs.Pulsewidth

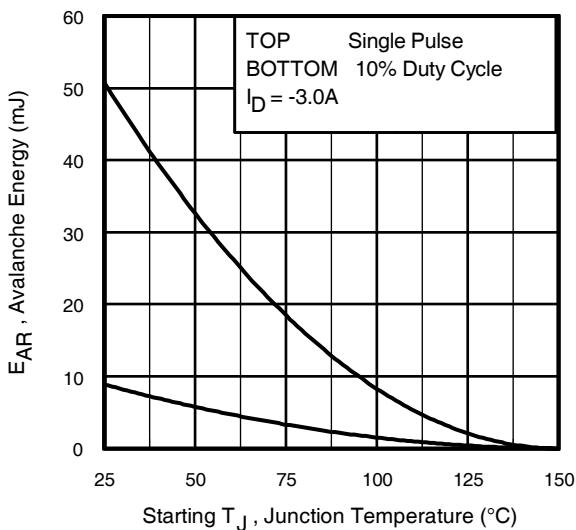


Fig 39. Maximum Avalanche Energy Vs. Temperature

Notes on Repetitive Avalanche Curves , Figures 15, 16:
(For further info, see AN-1005 at www.irf.com)

1. Avalanche failures assumption:
Purely a thermal phenomenon and failure occurs at a temperature far in excess of T_{jmax} . This is validated for every part type.
 2. Safe operation in Avalanche is allowed as long as T_{jmax} is not exceeded.
 3. Equation below based on circuit and waveforms shown in Figures 12a, 12b.
 4. $P_D(\text{ave})$ = Average power dissipation per single avalanche pulse.
 5. BV = Rated breakdown voltage (1.3 factor accounts for voltage increase during avalanche).
 6. I_{av} = Allowable avalanche current.
 7. ΔT = Allowable rise in junction temperature, not to exceed T_{jmax} (assumed as 25°C in Figure 15, 16).
- t_{av} = Average time in avalanche.
 D = Duty cycle in avalanche = $t_{av} \cdot f$
 $Z_{thJC}(D, t_{av})$ = Transient thermal resistance, see figure 11)


$$P_D(\text{ave}) = 1/2 (1.3 \cdot BV \cdot I_{av}) = \Delta T / Z_{thJC}$$

$$I_{av} = 2\Delta T / [1.3 \cdot BV \cdot Z_{th}]$$




$$E_{AS(AR)} = P_D(\text{ave}) \cdot t_{av}$$

SO-8 Package Outline

Dimensions are shown in millimeters (inches)

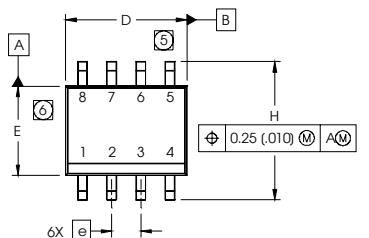


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.189	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e1	.050	BASIC	1.27	BASIC
e1	.028	BASIC	0.635	BASIC
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
Y	0°	8°	0°	8°

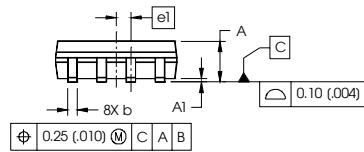


SO-8 Part Marking Information (Lead-Free)

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

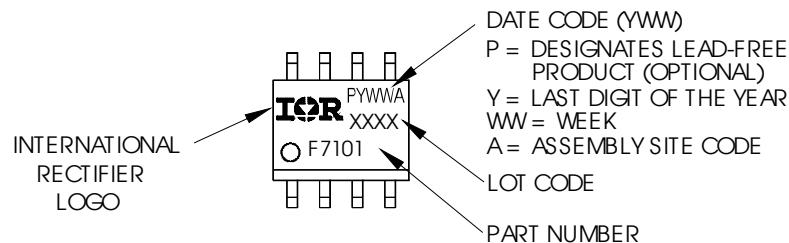


SO-8 Tape and Reel

Dimensions are shown in millimeters (inches)

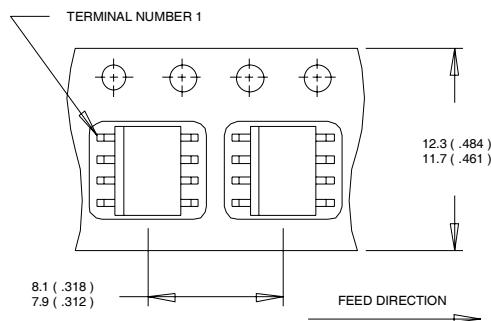

NOTES:

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

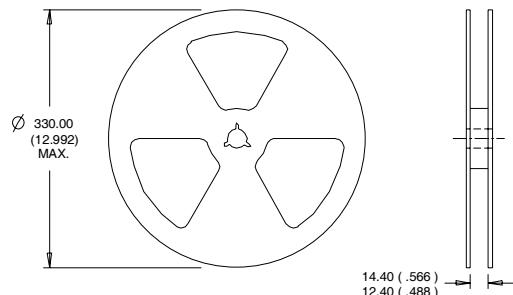

NOTES:

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.
This product has been designed and qualified for the Consumer market.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information. 06/04
www.irf.com