



**Capable of 2.4A to 3.5A  
high capacity load  
current control**

**PhotoMOS®  
HE 1 Form A  
High Capacity (AQV250G3)**

New

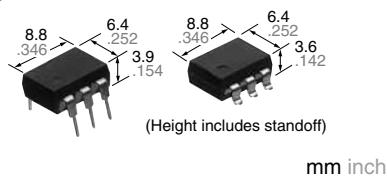

### FEATURES

1. Greatly increased load current in a compact DIP package  
Continuous load current: 3.5A (AQV252G3)
2. Greatly improved specifications allow you to use this in place of mercury and mechanical relays.
3. Low on-resistance (Typ. 33mΩ, AQV252G3)

### TYPICAL APPLICATIONS

- Security equipment
- Fire-preventing system
- Industrial machine
- Thermostat (HVAC temperature controller)

**RoHS compliant**

### TYPES

Output rating*		Package	Part No.				Packing quantity		
			Through hole terminal		Surface-mount terminal				
Load voltage	Load current		Tube packing style		Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	Tube	Tape and reel	
			Tube packing style						
AC/DC dual use <b>New</b>	60 V	DIP6-pin	AQV252G3	AQV252G3A	AQV252G3AX	AQV252G3AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.	
<b>New</b>	100 V	DIP6-pin	AQV255G3	AQV255G3A	AQV255G3AX	AQV255G3AZ			

\*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING

#### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	Type of connection	AQV252G3(A)	AQV255G3(A)	Remarks
Input	LED forward current	I <sub>F</sub>	A	50 mA		
	LED reverse voltage	V <sub>R</sub>		5 V		
	Peak forward current	I <sub>FP</sub>		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>		75 mW		
Output	Load voltage (peak AC)	V <sub>L</sub>	A	60 V	100 V	
	Continuous load current	I <sub>L</sub>		3.5 A	2.4 A	A connection: Peak AC, DC B, C connection: DC
	Peak load current	I <sub>peak</sub>		5.0 A	3.2 A	
	Power dissipation	P <sub>out</sub>	B	7.0 A	4.8 A	
	Total power dissipation	P <sub>T</sub>		10 A	7.0 A	100ms (1 shot), V <sub>L</sub> = DC at A connection
I/O isolation voltage		V <sub>iso</sub>		600 mW		
Ambient temperature		T <sub>opr</sub>		650 mW		
Operating		T <sub>stg</sub>		1,500 Vrms		
Storage				-40 to +85°C -40 to +185°F		(Non-icing at low temperatures)
				-40 to +100°C -40 to +212°F		

# HE 1 Form A High Capacity (AQV25OG3)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV252G3(A)	AQV255G3(A)	Condition
Input	LED operate current	Typical Maximum	I <sub>Fon</sub>	—	0.5 mA 3 mA	I <sub>L</sub> = 100mA
	LED turn off current	Minimum Typical			0.2 mA 0.4 mA	
	LED dropout voltage	Typical Maximum	V <sub>F</sub>	—	1.32 V (1.14 V at I <sub>F</sub> = 5 mA) 1.5 V	I <sub>F</sub> = 50 mA
Output	On resistance	Typical	R <sub>on</sub>	A	0.033 Ω	I <sub>F</sub> = 5 mA I <sub>L</sub> = Max. Within 1 s
		Maximum			0.06 Ω	
		Typical	R <sub>on</sub>	B	0.017 Ω	
		Maximum			0.04 Ω	
		Typical	R <sub>on</sub>	C	0.0095 Ω	
		Maximum			0.02 Ω	
	Off state leakage current	Maximum	I <sub>Leak</sub>	—	1 μA	I <sub>F</sub> = 0 mA, V <sub>L</sub> = Max.
Transfer characteristics	Turn on time*	Typical	T <sub>on</sub>	—	1.8 ms	I <sub>F</sub> = 5 mA, I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
		Maximum			5 ms	
	Turn off time*	Typical	T <sub>off</sub>	—	0.15 ms	I <sub>F</sub> = 5 mA, I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
		Maximum			0.5 ms	
	I/O capacitance	Typical	C <sub>iso</sub>	—	0.8 pF	f = 1 MHz V <sub>B</sub> = 0 V
		Maximum			1.5 pF	
	Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	—	1,000 MΩ	500 V DC
	Max. operating frequency	Maximum	—	—	2.5 cps	I <sub>F</sub> = 5 mA, duty = 50% I <sub>L</sub> = Max., V <sub>L</sub> = Max.

\*Turn on/Turn off time

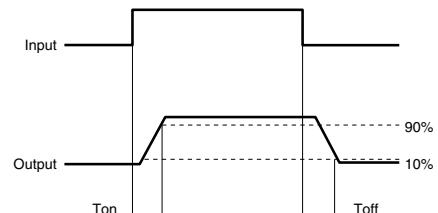

## 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.


Item	Symbol	Min.	Max.	Unit
AQV252G3(A)	LED forward current	I <sub>F</sub>	5	30
	Load voltage (Peak AC)	V <sub>L</sub>	—	48
AQV255G3(A)	Continuous load current (A connection)	I <sub>L</sub>	—	3.3
	Load voltage (Peak AC)	V <sub>L</sub>	—	80
	Continuous load current (A connection)	I <sub>L</sub>	—	2.4

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics  
 Sample: AQV252G3  
 Allowable ambient temperature: -40 to +85°C  
 -40 to +185°F

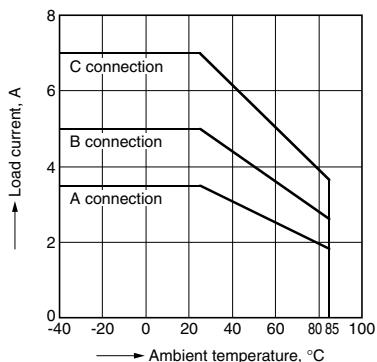


1.-(2) Load current vs. ambient temperature characteristics  
 Sample: AQV255G3  
 Allowable ambient temperature: -40 to +85°C  
 -40 to +185°F

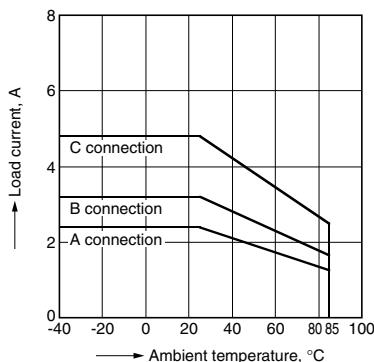


2. On resistance vs. ambient temperature characteristics  
 Measured portion: between terminals 4 and 6;  
 LED current: 5 mA; Load voltage: Max. (DC)  
 Continuous load current: Max. (DC)

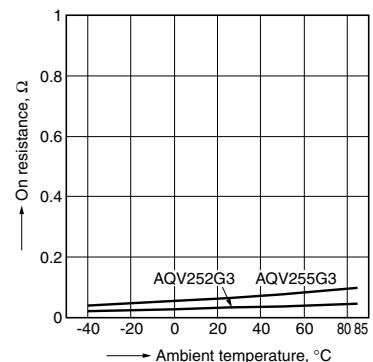


3. Turn on time vs. ambient temperature characteristics  
 Tested sample: All;  
 LED current: 5 mA; Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

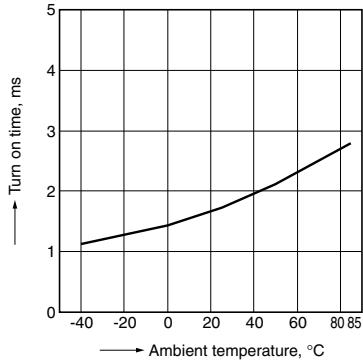


4. Turn off time vs. ambient temperature characteristics  
 LED current: 5 mA; Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

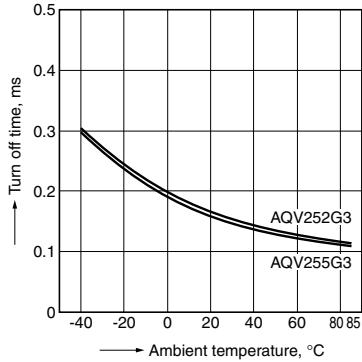


5. LED operate current vs. ambient temperature characteristics  
 Tested sample: All;  
 Load voltage: 10 V (DC);  
 Continuous load current: 100mA (DC)

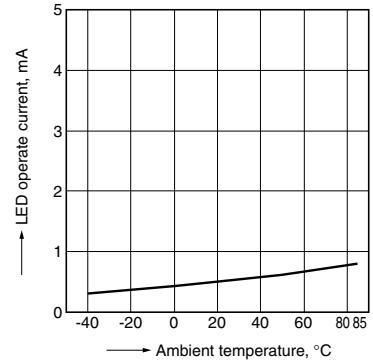


6. LED turn off current vs. ambient temperature characteristics  
 Tested sample: All;  
 Load voltage: 10 V (DC);  
 Continuous load current: 100mA (DC)

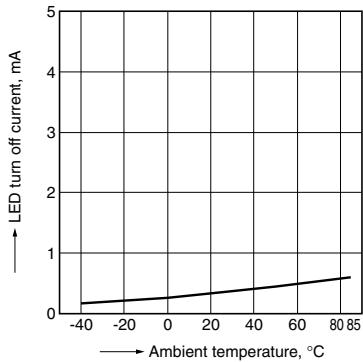

7. LED dropout voltage vs. ambient temperature characteristics  
 Tested sample: All;  
 LED current: 5 to 50 mA

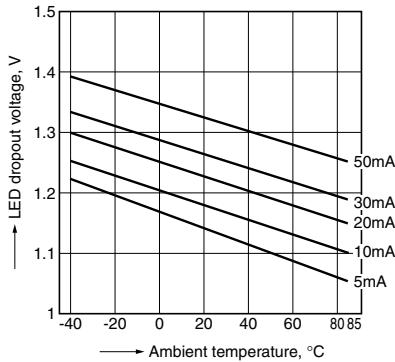


8. Current vs. voltage characteristics of output at MOS portion  
 Measured portion: between terminals 4 and 6;  
 Ambient temperature: 25°C 77°F

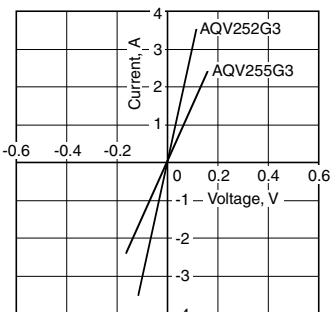

# HE 1 Form A High Capacity (AQV25OG3)


## 9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

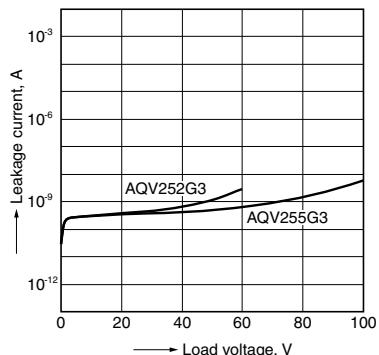


## 10. Turn on time vs. LED forward current characteristics

Tested sample: All;  
Measured portion: between terminals 4 and 6;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F

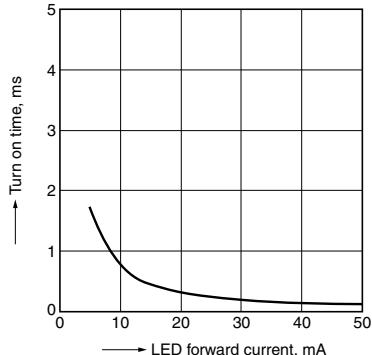


## 11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F

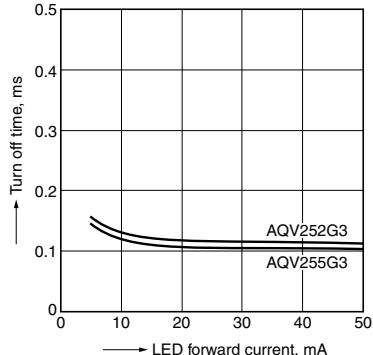


## 12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

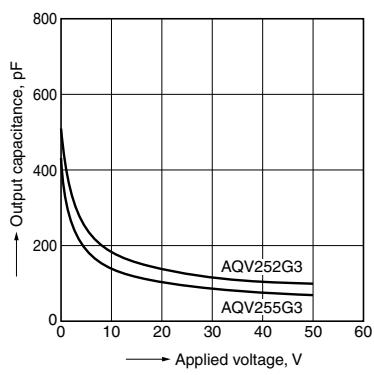

## 13. Max. operating frequency vs. load voltage and load current characteristics

LED current: 5 mA  
Ambient temperature: 25°C 77°F

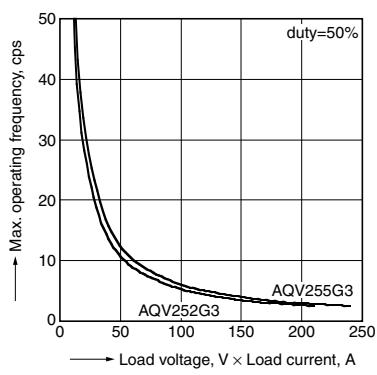

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

---

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017