
# PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION						
REV	DESCRIPTION	DATE	APPROVED			
A	INITIAL RELEASE, RFS. 27373	06/18/19	MK			

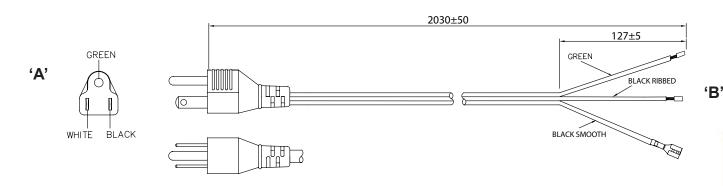

## **GENERAL SPECIFICATIONS:**

**RATING:** 13A / 125V AC

CABLE TYPE / SIZE: SPT-3, # 3 x 16 AWG

**TEMPERATURE RATING:** 60° C

BLACK SMOOTH/ BLACK RIBBED / GREEN **CONDUCTOR COLORS:** 


**OVERALL LENGTH:** 2030 + 50 mm CABLE OUTER DIAMETER: 5x11 mm Nominal END 'A' PLUG: NFMA 5-15P

END 'B': SEE TERMINATION TABLE

APPROVALS PLUG: UL. CSA OR cUL APPROVALS CABLE: UL. CSA OR cUL

## PACKING:

**HANKING** 



## Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing. A delay in receipt of this form will delay delivery schedule.

Company Name:

Customer P/N:

Quote Number:

Date:

Auth. Rep. Name: Auth. Rep. Signature:

#### **CONDUCTOR TERMINATION TABLE:**

Wire	Color	Split ±5 mm	RIJ ± 1 mm	Terminal
Wire 1	Black	127	-	Quick Disconnect
	Smooth			(note 1)
Wire 2	Green	127	10	Partial Strip
Wire 3	Black	127	10	Partial Strip
	Ribbed			

#### NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



DATE:

06/18/19

APRVD: BS





PART NO:

RELEASED By PUCXD 2:23 pm, Jun 20, 2019



SHEET 1/1

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
•			TABULATION BLOCK	_

## NOTE: 1. Black conductor has fully insulated Molex disconnect P/N: BB5263 or equivalents imitation of Use: Globtek Inc. will not be liable for the

safety and performance of these power Contents of this document product if unauthorized access and repair are subject to change withoccurs. End user should consult the applicaout prior notice ble UL,CSA or EN Standards for proper installation instruction.

Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

		TOLERA DECIMALS .xx +/- 0.1 .xxx +/005	NCES: ANGULAR +/- 1*	G
NIT.BY: NF	DATE:	MILLIMETERS .xx +/- 0.3	ANGULAR +/- 1°	DWG TIT

06/18/19 xxx +/= 013 DATE: FSCN No.: SIZE DRAWN: NF G, CC, YL Α 06/18/19

SCALE: NONE

## GlobTek, Inc. www.globtek.com

3021616F7000(R)

186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111

DWG TITLE:	NORTH AMERICAN NON-DETACHABLE CORDSET	

REV. Α