





ISSUE NUMBER	
ORIGINAL	(1)

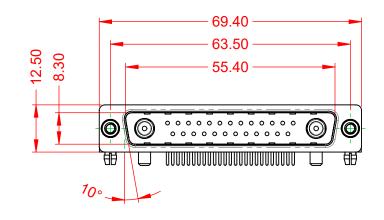



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED

## 10.67 ۲ O 13.20

	POWER/CO-AX CONTACT RATING: IF PRESENT)	30A (CURREN
\$	SIGNAL CONTACT CURRENT RATING:	
1	SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
	NSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

.XX ±0.13 .XXX ±0.05

WITHSTANDING VOLTAGE:


**OPERATING TEMPERATURE:** 

NT)

-55°C ~ 125°C

ТАСТ

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
1			DRAWN: C.B	DATE: JAN. 01/201	19	
1			CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-27W2640-3T5		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-27W2	2640-3T5	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

